
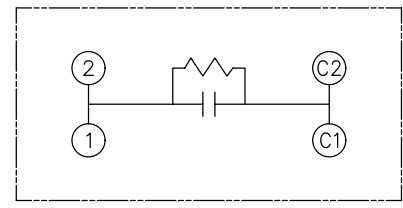


| | |
|-----|-----|
| TOL | +/- |
| A | .06 |
| B | .12 |
| C | .18 |
| D | .50 |
| E | .04 |

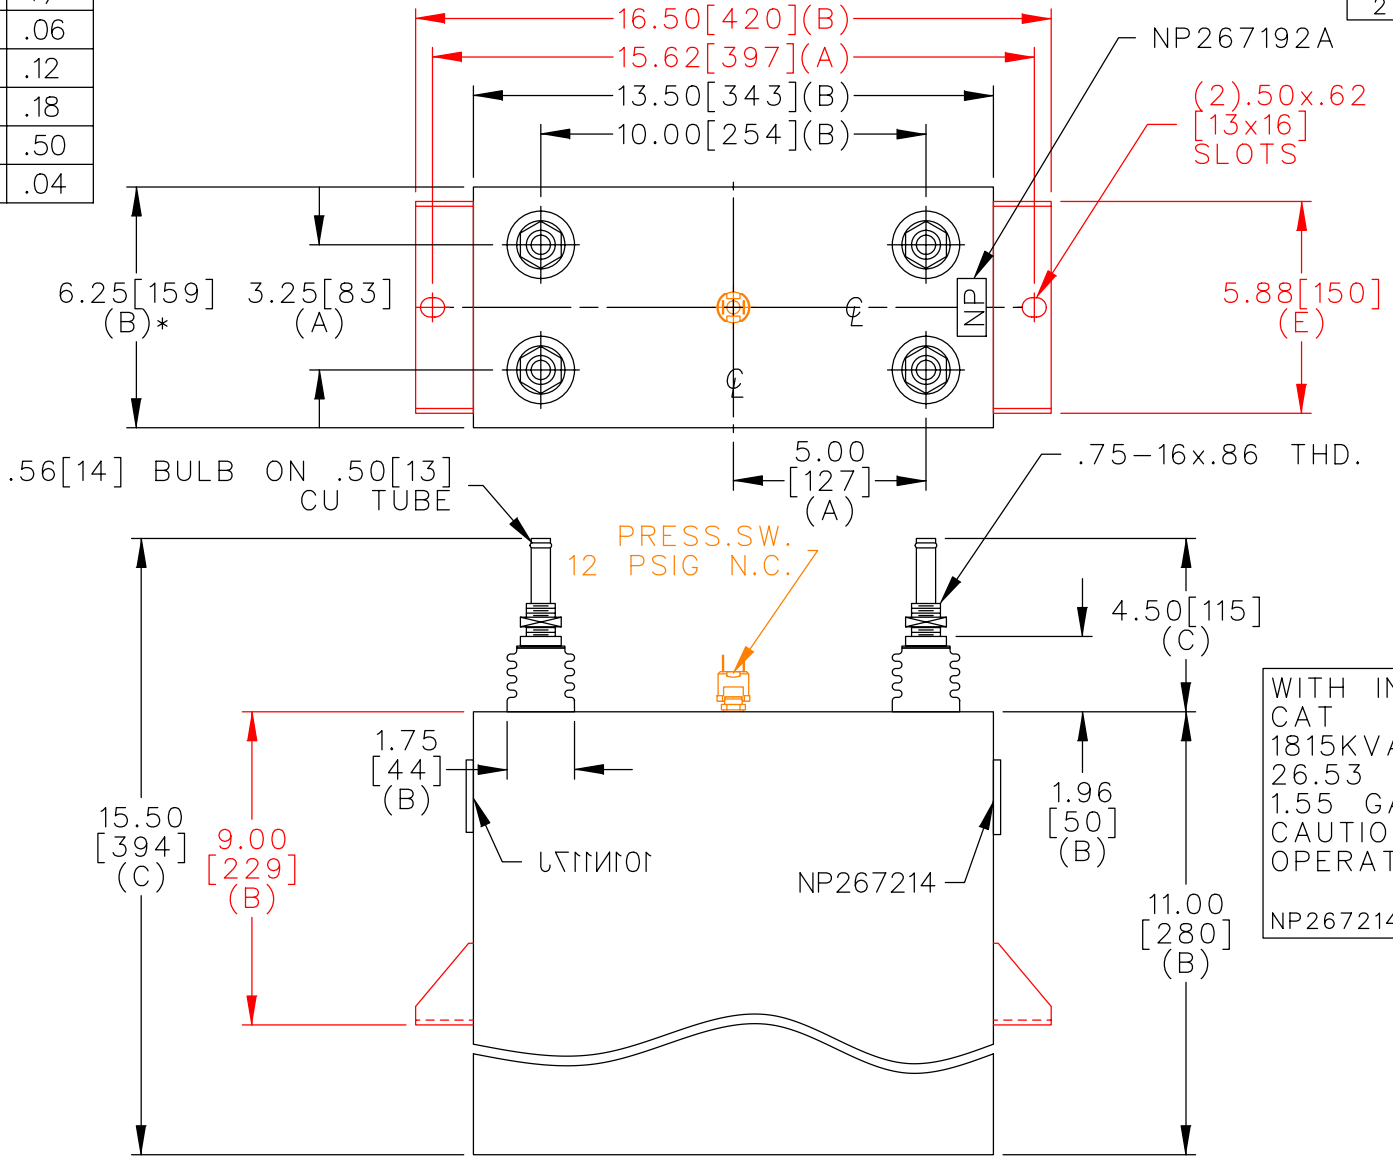

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS
 CAT 19L0955WH4 SN
 1815KVAR 3300V 1000HZ 1PH
 26.53 UF/TAP
 1.55 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

| | | | | | | |
|---------------|---|--------------|------------------|---------------------------------|-------------------------------------|-----------------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | | SIZE A | UNIT WEIGHT 46 / 21 LB/KG | OUTLINE 19L0955WH4 | SHEET 2 CONT. 3 |
| | DRAWN 08/29/96 | LRD 08/29/96 | SCALE WC14 | version | | |
| ISSUED 9-4-96 | | | | | | DISTR TO |