

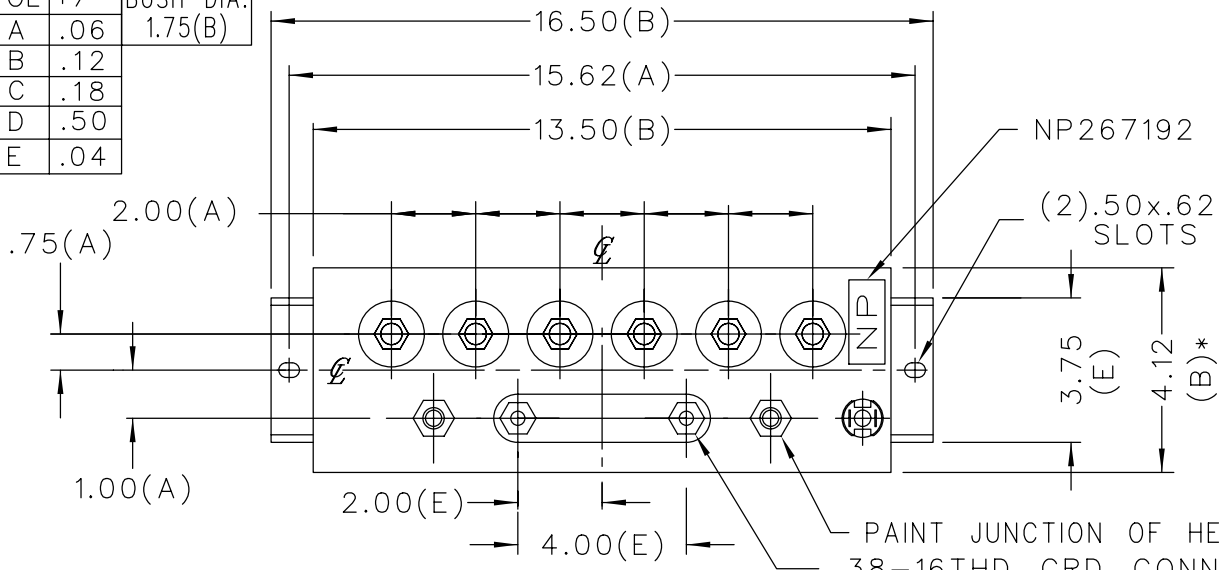


TOL	+/-	BUSH DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

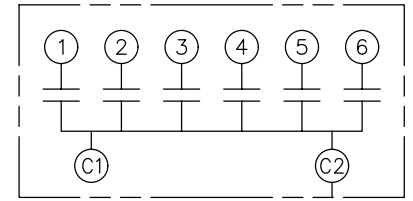

TERM	uF	kVAR
1	148.55	116.7
2	148.55	116.7
3	148.55	116.7
4	148.55	116.7
5	148.55	116.7
6	148.55	116.7

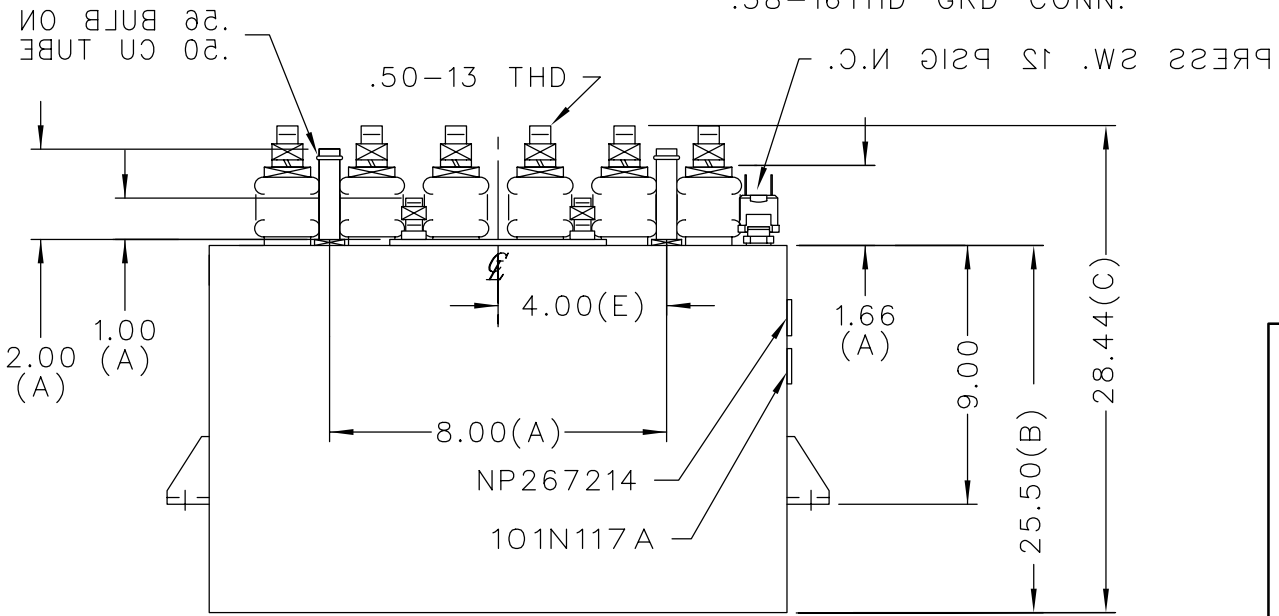

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH. RESISTORS  
 CAT. 19L956WH4  
 700 kVAR 500 V 500 Hz 1 Ph  
 6 x 148.55 uF/TAP  
 2.34 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192

 CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L956WH4</h2>	DISTR TO
	DRAWN B. ROSS AUG. 15, 1996 ISSUED		