
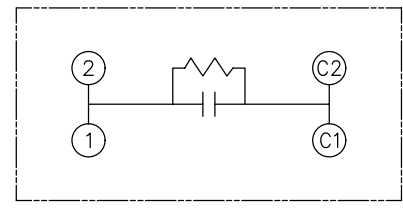


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

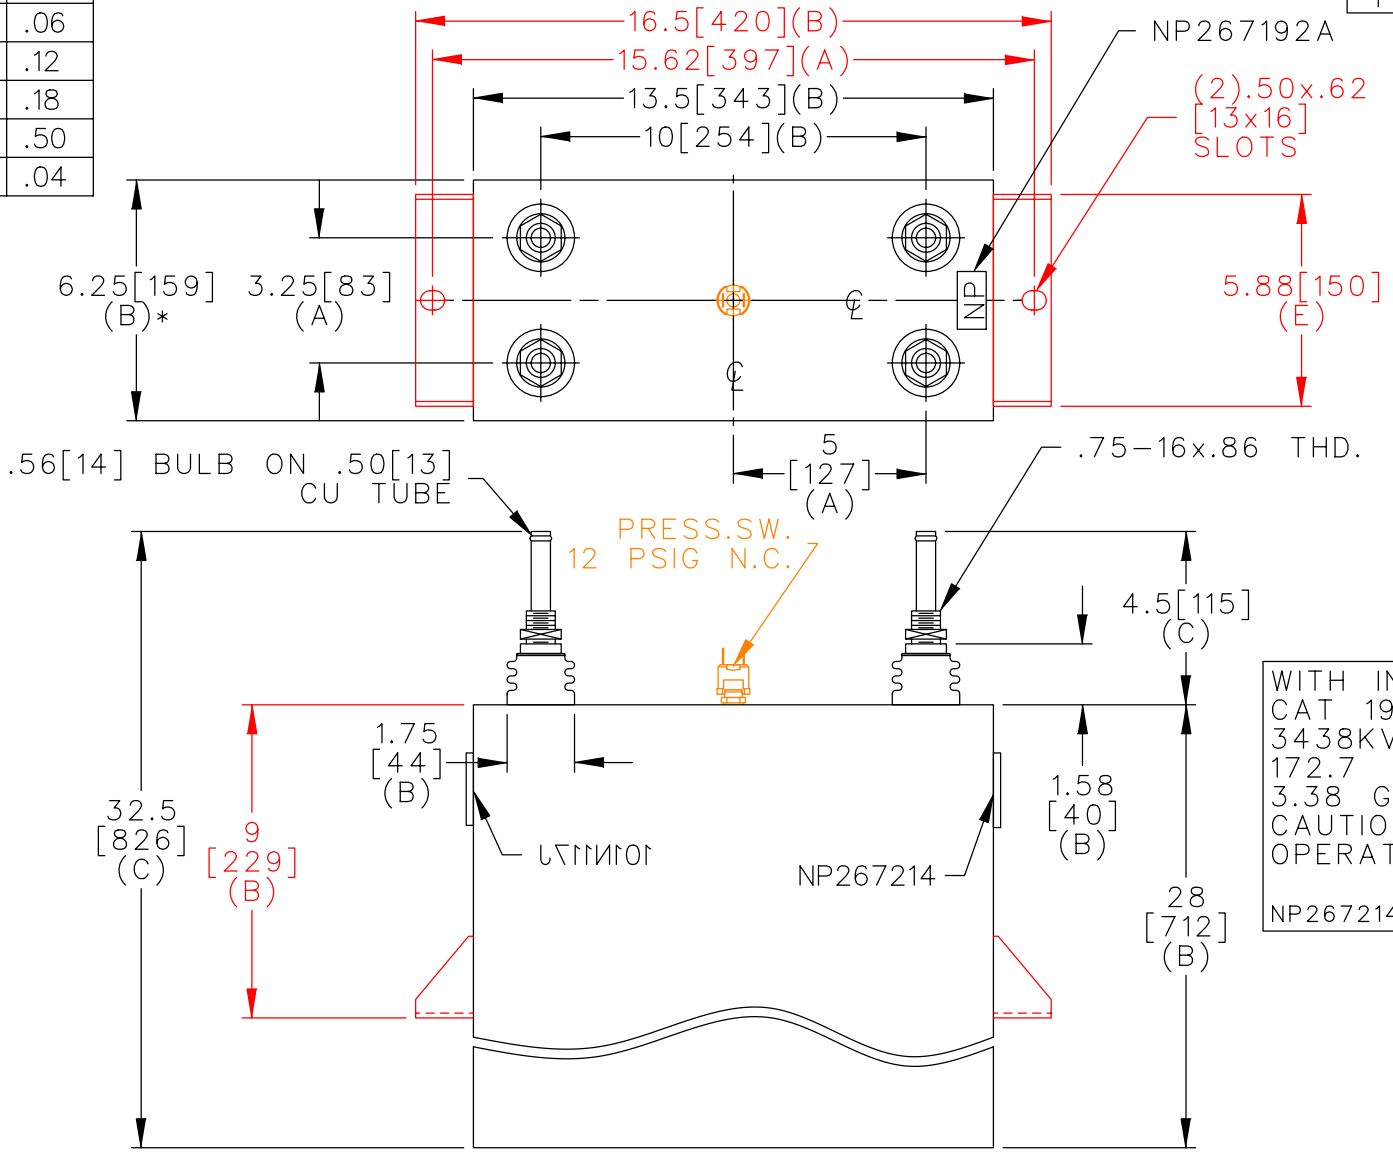

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS
 CAT 19L0962WH4 SN
 3438KVAR 2400V 550HZ 1PH
 172.7 UF/TAP
 3.38 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 108 / 49 LB/KG	OUTLINE 19L0962WH4	SHEET 2 CONT. 3 ON ON
	DRAWN 11/06/96	LRD 11/06/96	SCALE WC1	version		
ISSUED						

DISTR TO