

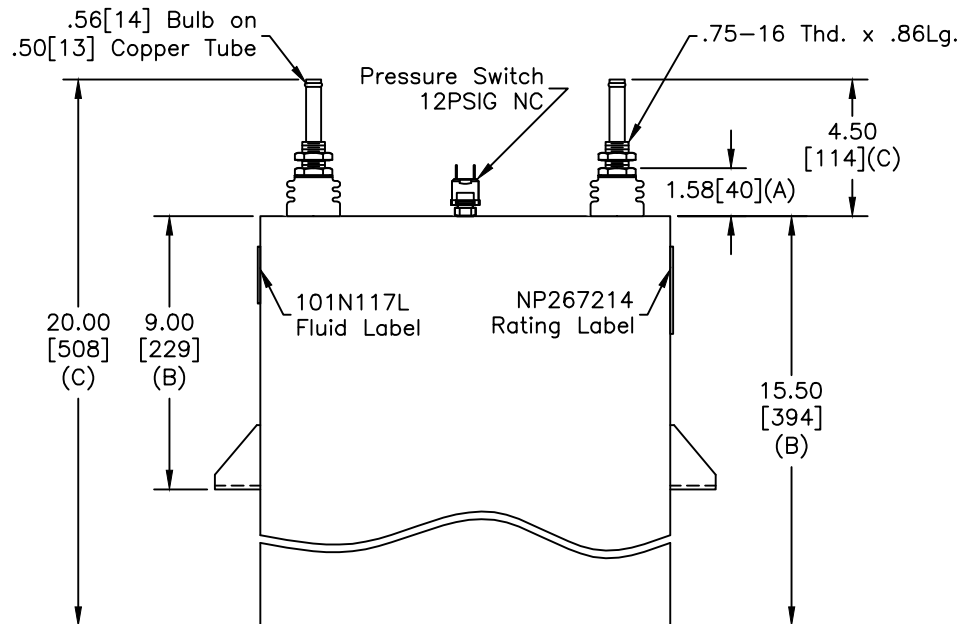


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA.	1.75[44](B)

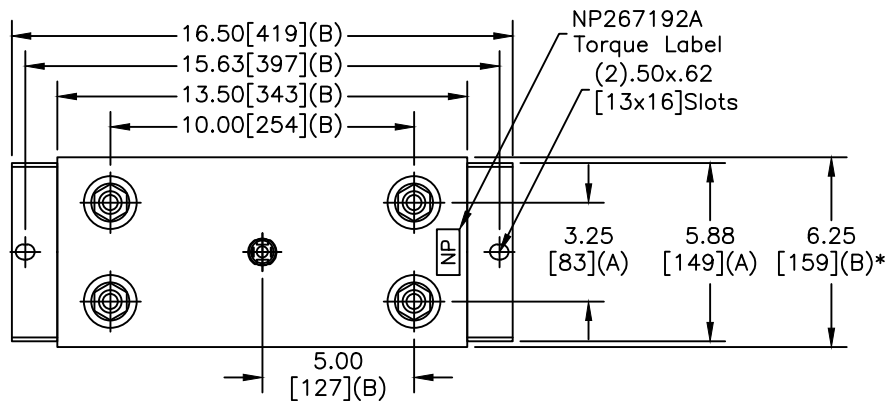

SCHEMATIC DIAGRAM - 107

GE CAPACITOR
WITH INTERNAL DISCH RESISTORS

CAT. 19L0969WH4 SN
3000KVAR 1250V 1000HZ 1PH
305.6 UF
2.03 GAL. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733

MADE IN USA NP267214

NOTES:

- Maximum terminal tightening torque
.50-13 thd. 15 ft-lbs. 20.3 N-m
.75-16 thd. 25 ft-lbs. 33.9 N-m
- Minimum water flow 1 GPM (3.8 l/m)

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS.

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN	JBC	DATE 11/6/1996
ISSUED		DATE 11/13/1996

Est Weight 86 lbs.	OUTLINE 19L0969WH4	
SCALE WC1	SHEET 2	CONT ON -

DISTR. TO