
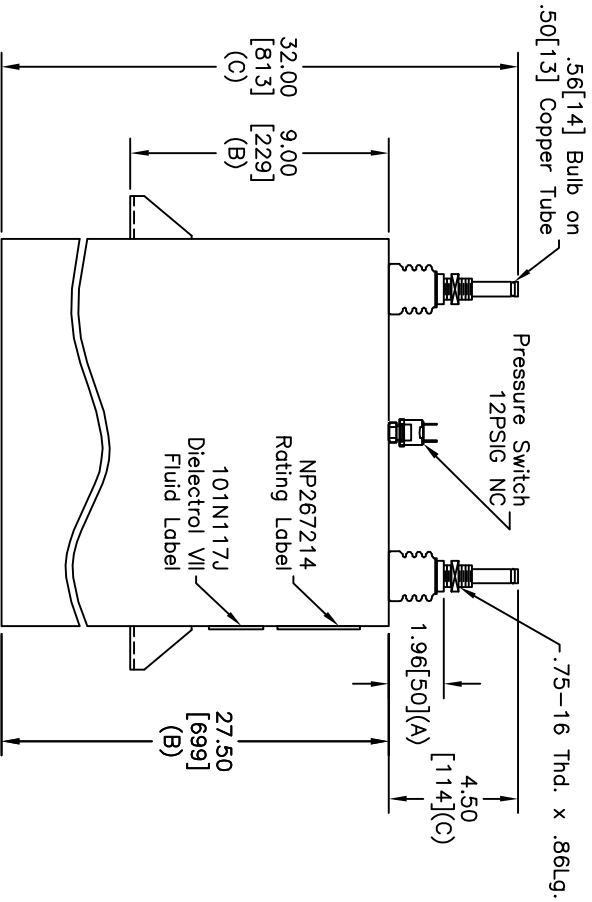



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH, DIA. 1.75[.44](B)	

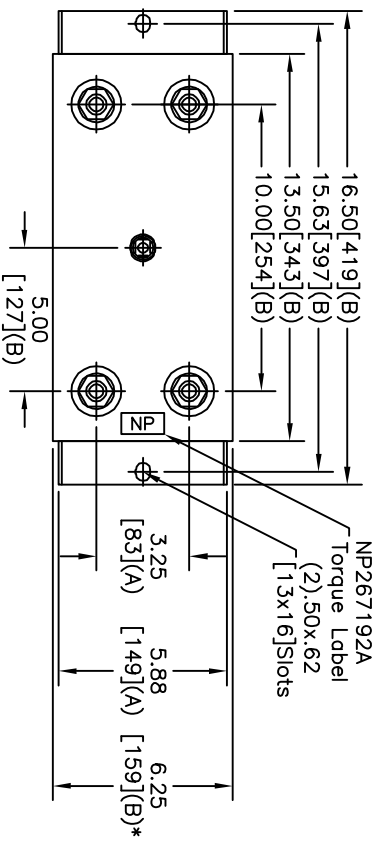

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS. NP267192A

SIZE	DWG NO	SHT	REV
A	19L0975WH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	Case w/3 28" Tail	10/17/2006	BTR



WITH INTERNAL DISCH RESISTORS  
 CAT. 19L0975WH4 SN  
 1700KVAR 3000V 300HZ 1PH  
 100.2 UF  
 3.3 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214  
 MADE IN USA

GE ENERGY  
 FORT EDWARD, N.Y., U.S.A.

DRAWN	EPC	DATE	8/29/1996
ISSUED		DATE	9/4/1996

SIZE A  
 SCALE WC1

# OUTLINE

## 19L0975WH4

DISTR. TO