



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

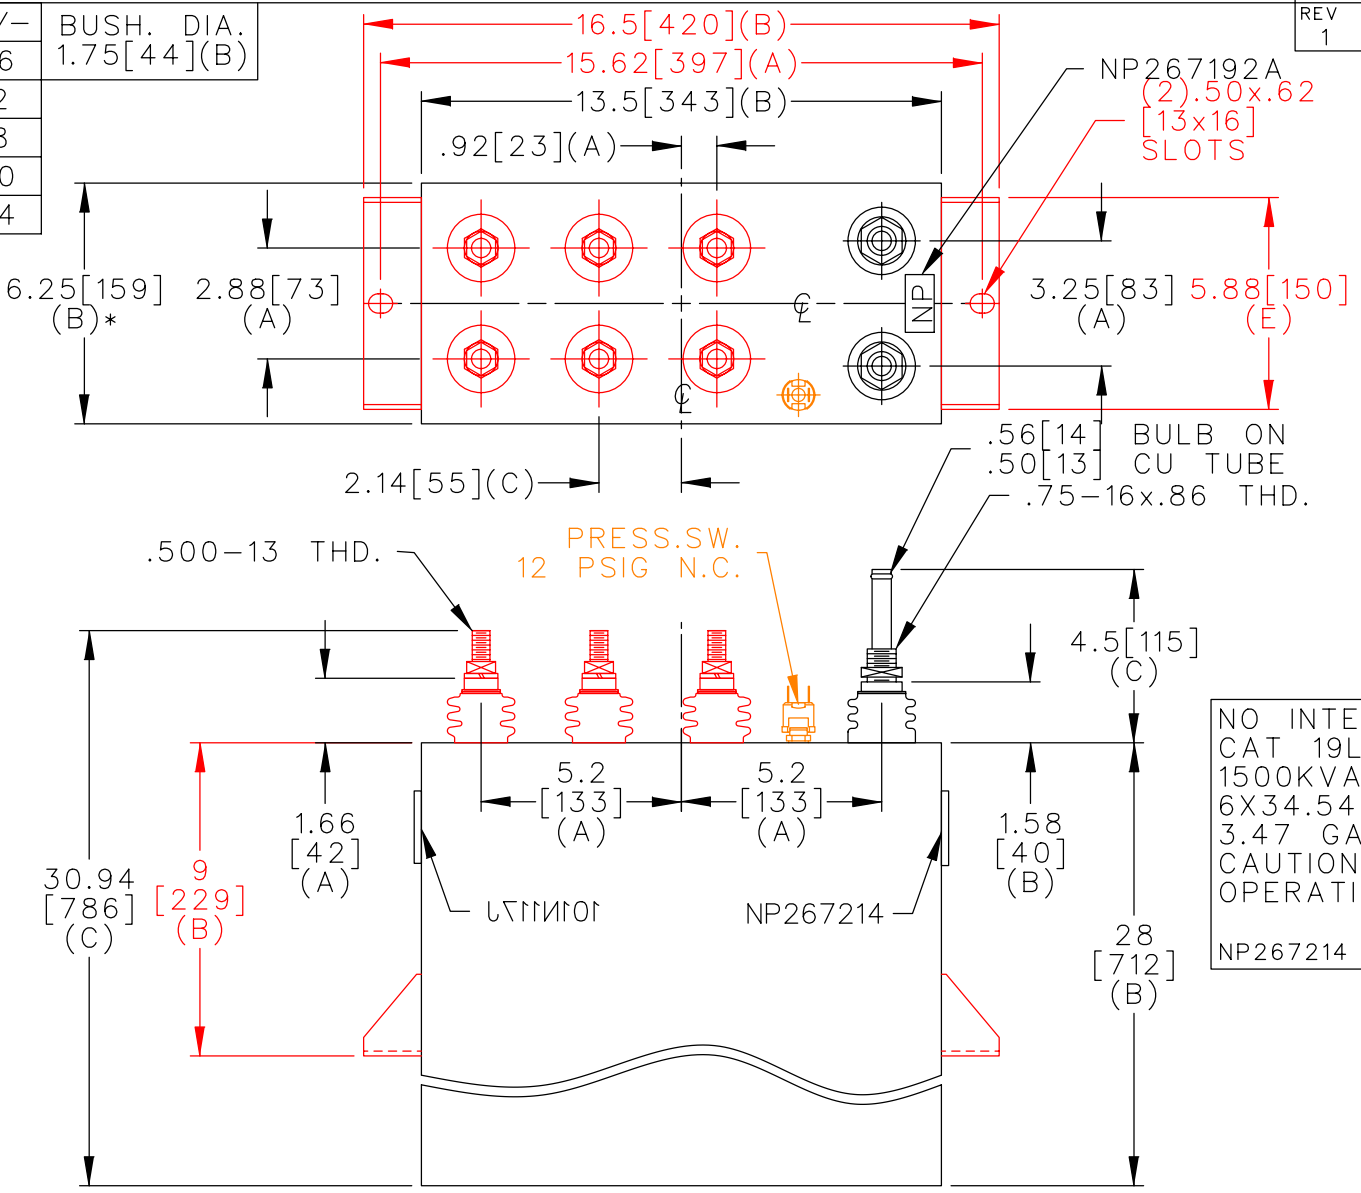

TERM	uF	kVAR
1	34.54	250
2	34.54	250
3	34.54	250
4	34.54	250
5	34.54	250
6	34.54	250

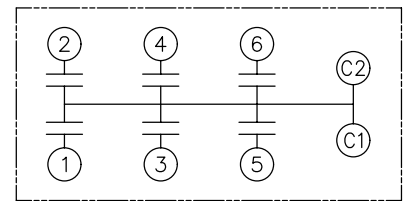

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS  
 CAT 19L0994WH4 SN  
 1500KVAR 2400V 200HZ 1PH  
 6X34.54 UF/TAP  
 3.47 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 109 / 50 LB/KG	<b>OUTLINE</b> <b>19L0994WH4</b>	DISTR TO
	DRAWN 08/29/96	LRD 08/29/96	SCALE WC6	version		
ISSUED						