



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

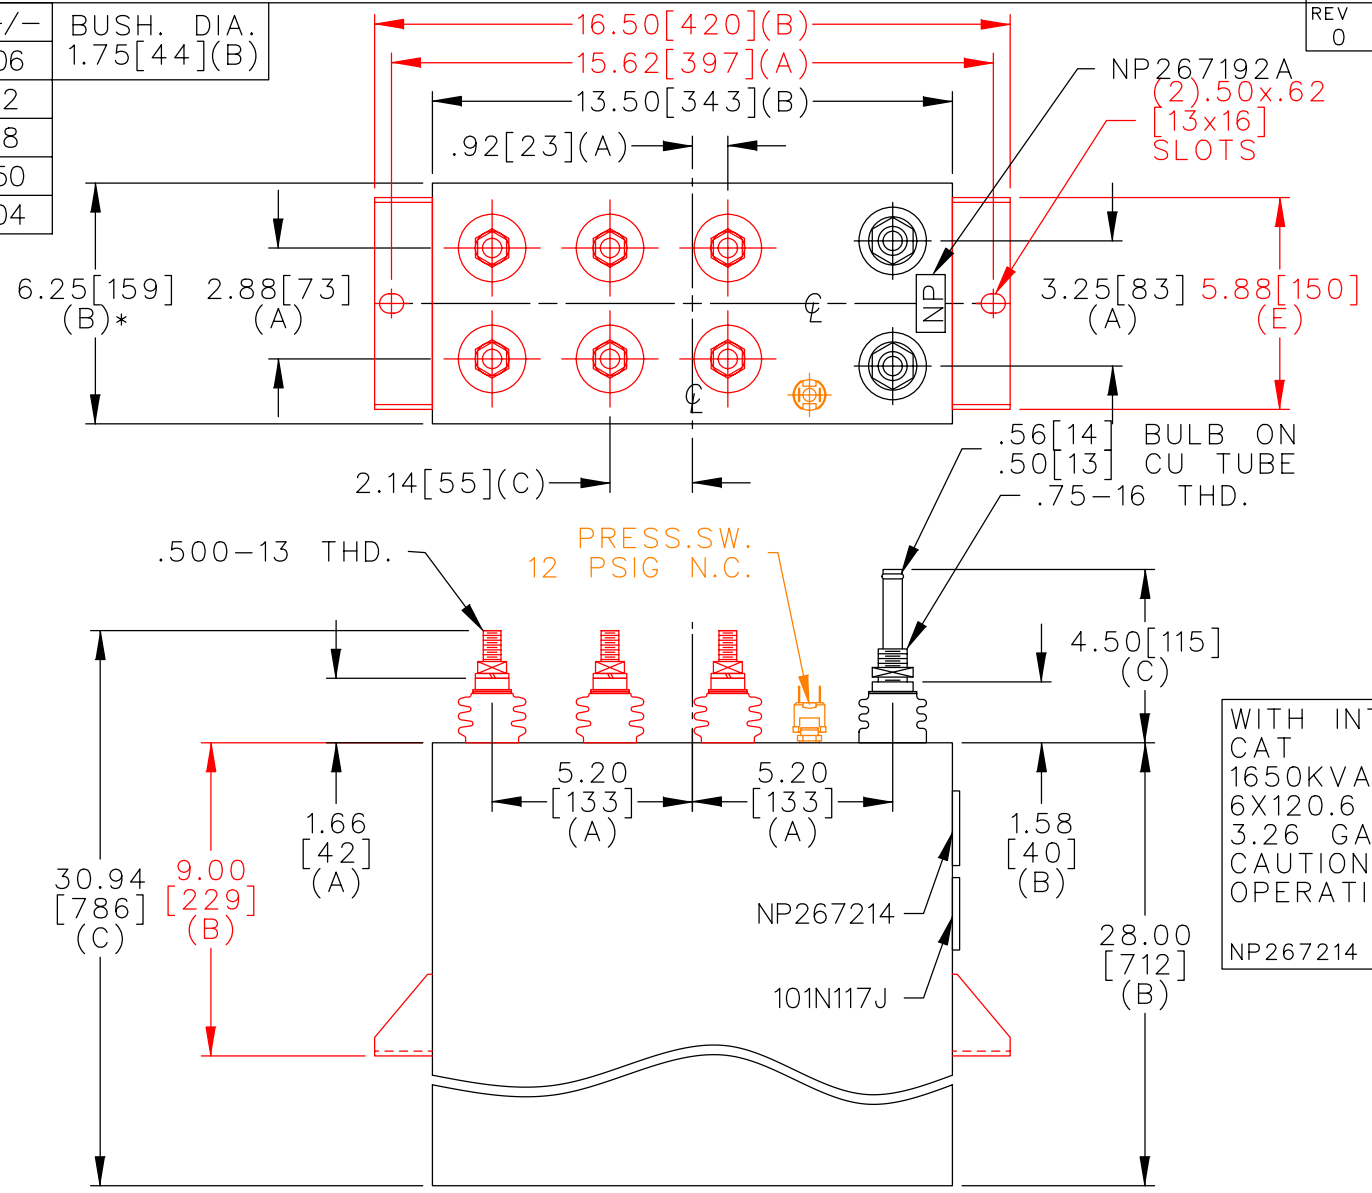

TERM	uF	kVAR
1	120.6	275
2	120.6	275
3	120.6	275
4	120.6	275
5	120.6	275
6	120.6	275

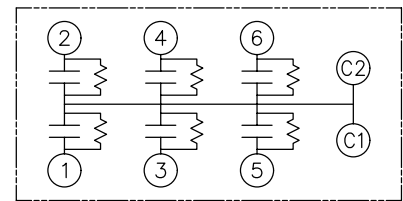

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L1002WH4 SN
 1650KVAR 1100V 300HZ 1PH
 6X120.6 UF/TAP
 3.26 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	UNIT WEIGHT 120 / 55 LB/KG	<h1>OUTLINE</h1> <h2>19L1002WH4</h2>	SHEET 2 CONT. 3 ON 3
	DRAWN 08/29/96 LRD 08/29/96 ISSUED	SCALE WC6 version		