



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

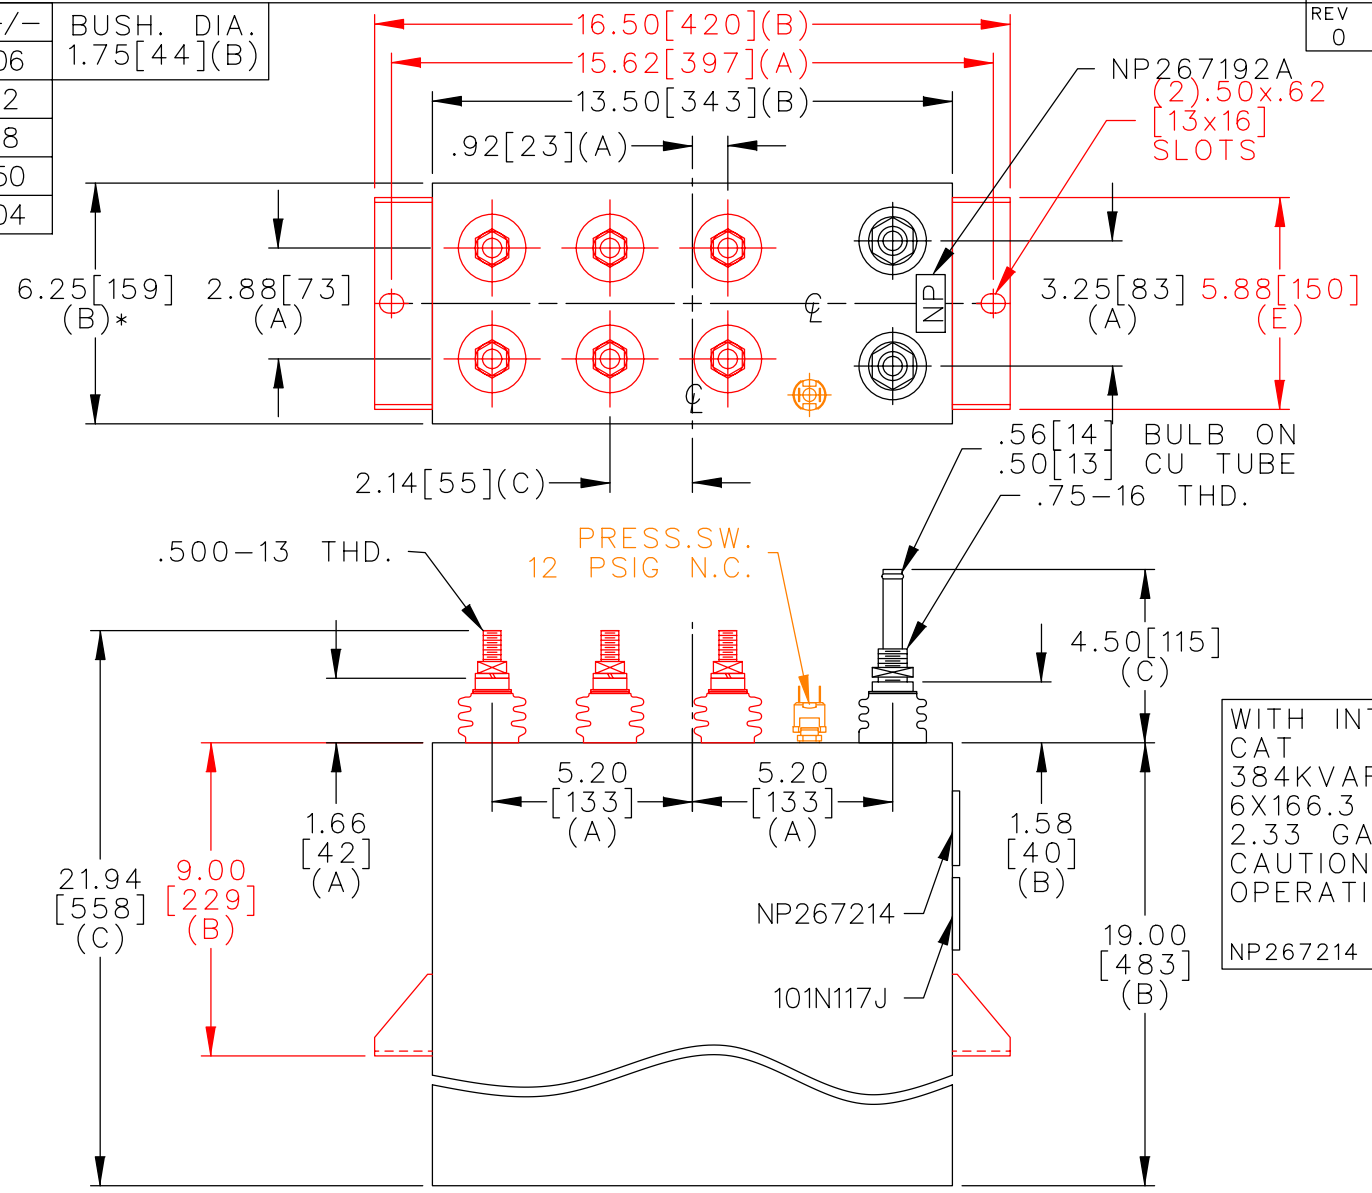

TERM	uF	kVAR
1	166.3	64
2	166.3	64
3	166.3	64
4	166.3	64
5	166.3	64
6	166.3	64

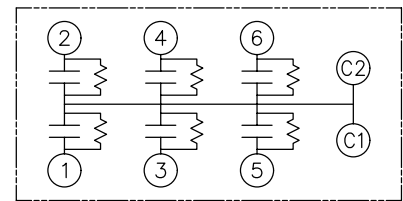

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L1003WH4 SN
 384KVAR 350V 500HZ 1PH
 6X166.3 UF/TAP
 2.33 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 88 / 40 LB/KG	OUTLINE 19L1003WH4	DISTR TO
	DRAWN 08/29/96	LRD 08/29/96	SCALE WC6	version		
ISSUED						