

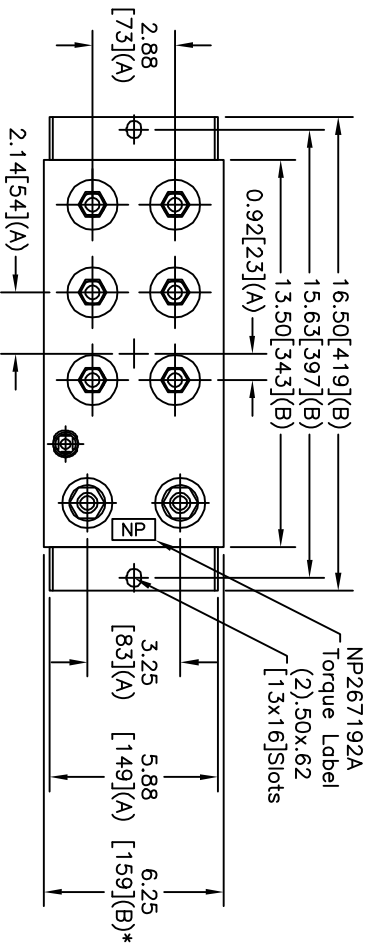


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH, DIA	1.75[44](B)



TERM	UF	KVAR
1	24.56	266.7
2	24.56	266.7
3	24.56	266.7
4	24.56	266.7
5	24.56	266.7
6	24.56	266.7

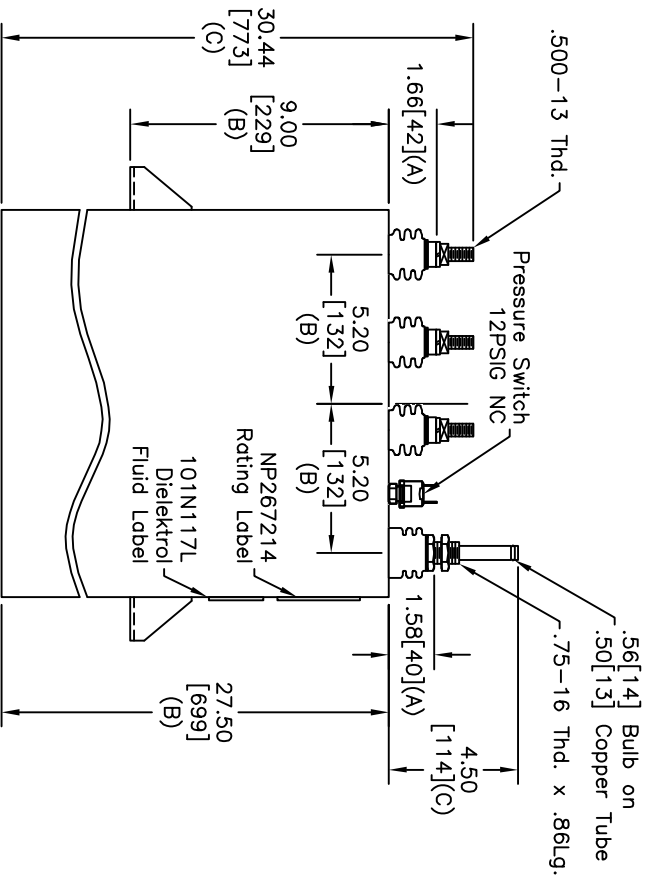

GE
CAPACITOR
 WITH INTERNAL DISCHARGE RESISTORS
 CAT. 19L1028WH4 SN
 1600KVAR 2400V 300HZ 1PH
 6x24.56UF/TAP
 3.4 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

MADE IN USA
 NP267214

SIZE	DWG NO	SHT	REV
A	19L1028WH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	101N117L WAS J	12/18/2007	BTR

* UP TO +.50[13]
 CASE BULGE
 MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS.
 NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.	
DRAWN	B Ross
ISSUED	
DATE	11/6/1996
DATE	11/13/1996

SIZE	A
SCALE	W/C6
Est Weight	114 lbs.

OUTLINE	
19L1028WH4	
SHEET	2
CONT	3

DISTR. TO