




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

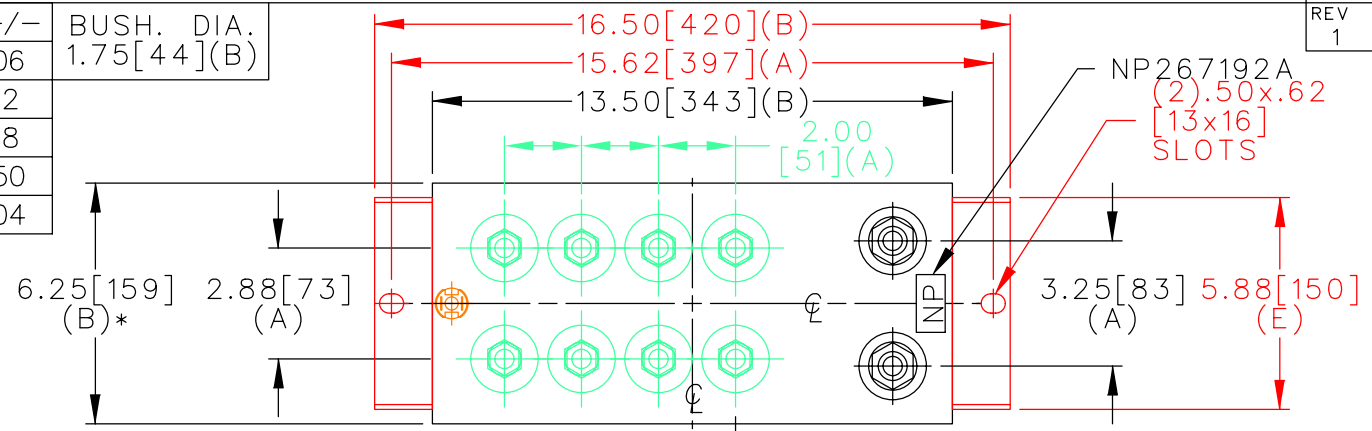

TERM	uF	kVAR
1	63.66	375
2	63.66	375
3	63.66	375
4	63.66	375
5	63.66	375
6	63.66	375
7	63.66	375
8	63.66	375

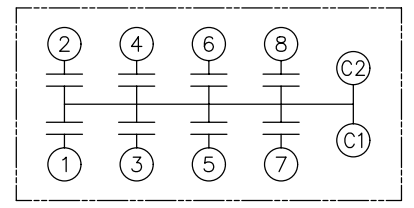

SCHEMATIC DIAGRAM - 800

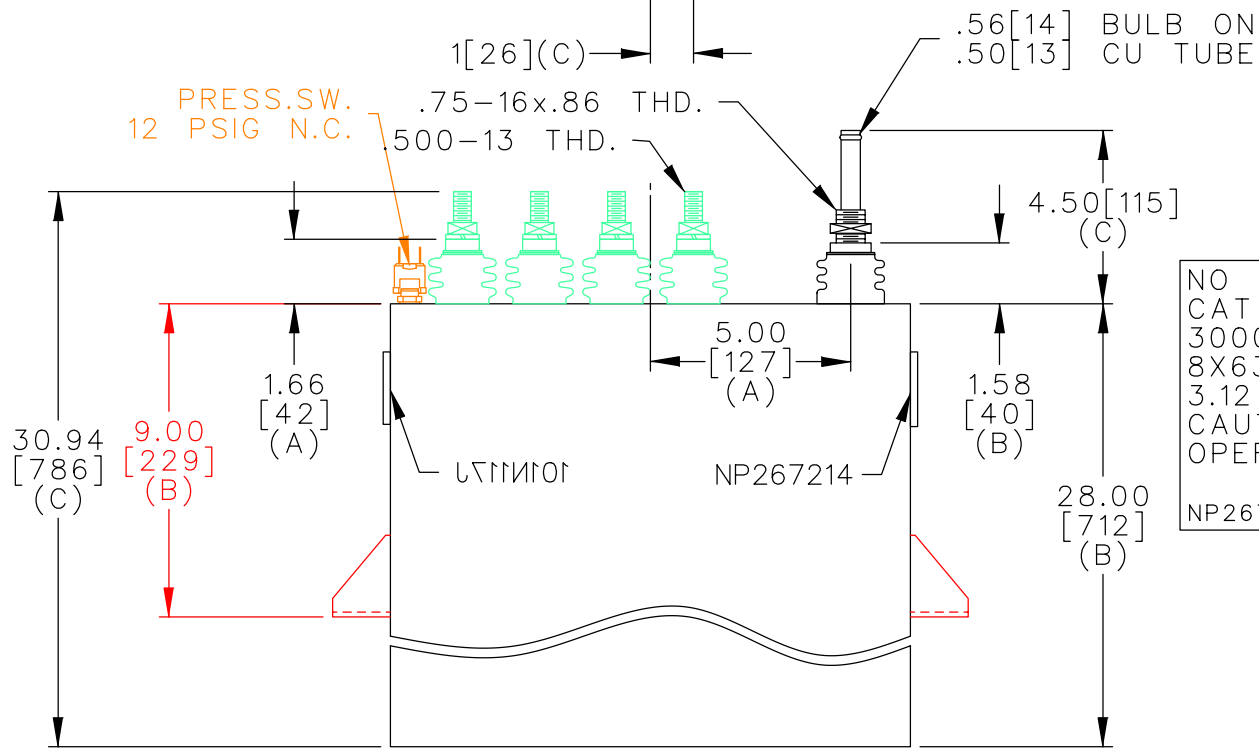

NO INTERNAL DISCH RESISTORS  
 CAT 19L1039WH4 SN  
 3000KVAR 1250V 600HZ 1PH  
 8X63.66 UF/TAP  
 3.12 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 128 / 58 LB/KG	<b>OUTLINE</b> <b>19L1039WH4</b>	SHEET 2 CONT. 3 ON ON
	DRAWN 11/06/96	LRD 11/06/96	SCALE WC7	version		
ISSUED						

DISTR TO