




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

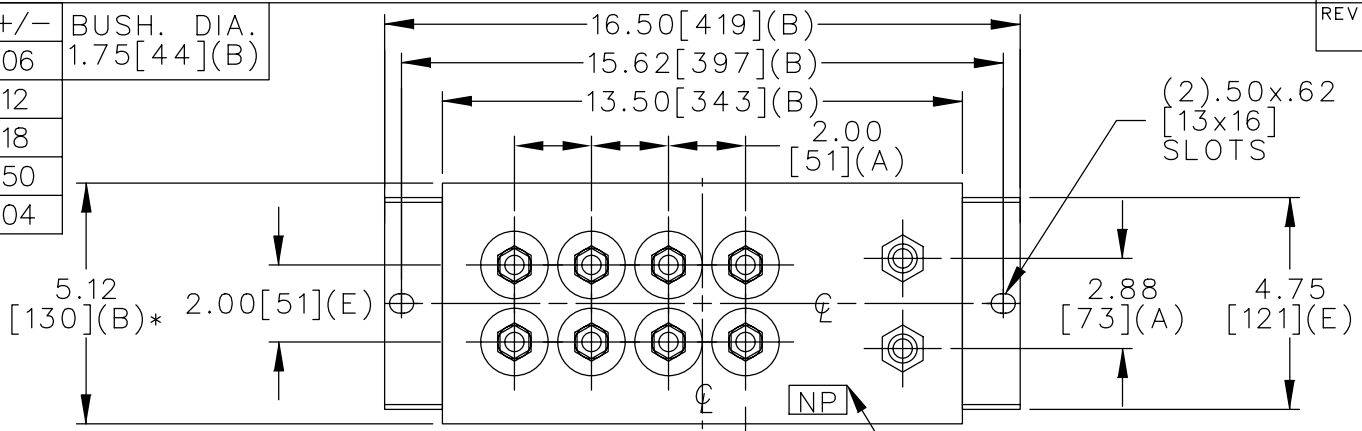

TERM	uF	kVAR
1	17.53	266.5
2	17.53	266.5
3	21.71	330.2
4	21.71	330.2
5	21.71	330.2
6	21.71	330.2
7	21.71	330.2
8	21.71	330.2

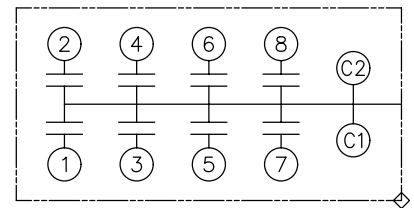

SCHEMATIC DIAGRAM - 801

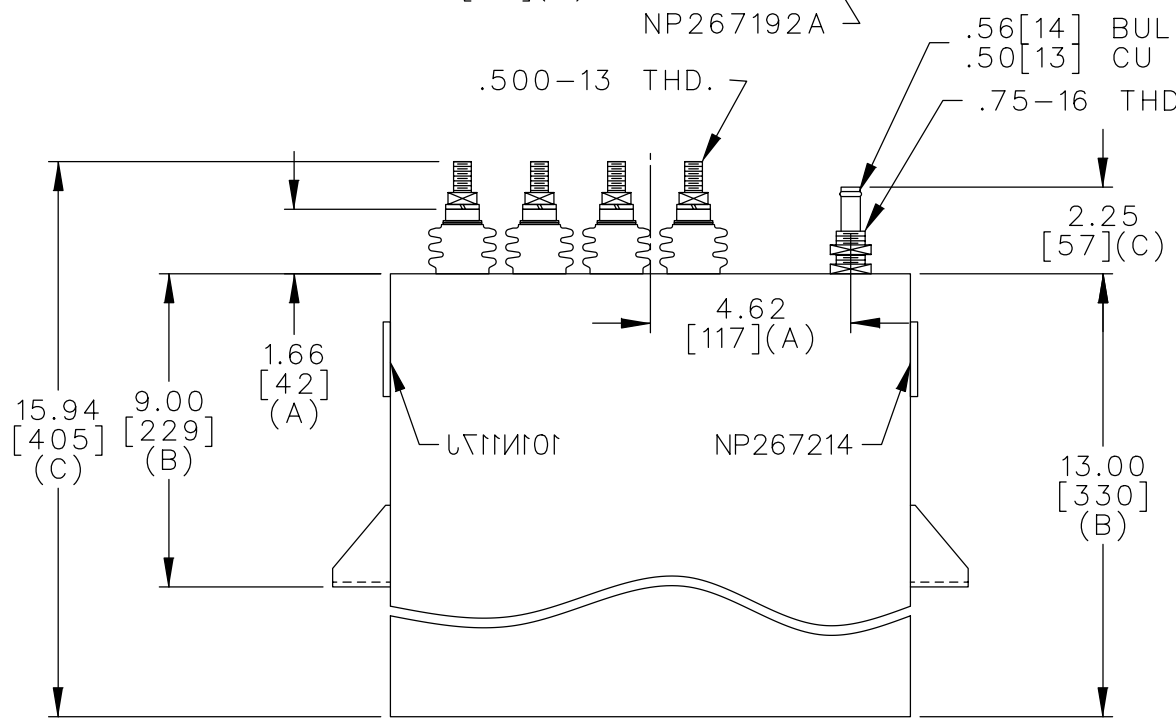

NO INTERNAL DISCH RESISTORS
 CAT. 19L1040WH3 SN
 2514KVAR 1100V 2000HZ 1PH
 2x17.53+6x21.71UF/TAP
 1.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1040WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	APR. 16, 1997	SCALE		
ISSUED					DISTR TO