


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA. 1.75[44](B)	


SIZE A	DWG NO 19L1046WH4	SHT 2	REV 2
REV 2	DESCRIPTION RE-TRACE	DATE 6/16/2010	APPROVED BTR

TERM	uF	kVAR
1	125	165.9
2	125	165.9
3	125	165.9
4	125	165.9
5	125	165.9
6	125	165.9
7	125	165.9
8	125	165.9



SCHEMATIC DIAGRAM - 800

CAPACITOR
 NO INTERNAL DISCHARGE RESISTORS
 CAT. 19L1046WH4 SN
 1327KVAR 650V 500HZ 1PH
 8x125UF/TAP
 2.26 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 MADE IN USA NP267214

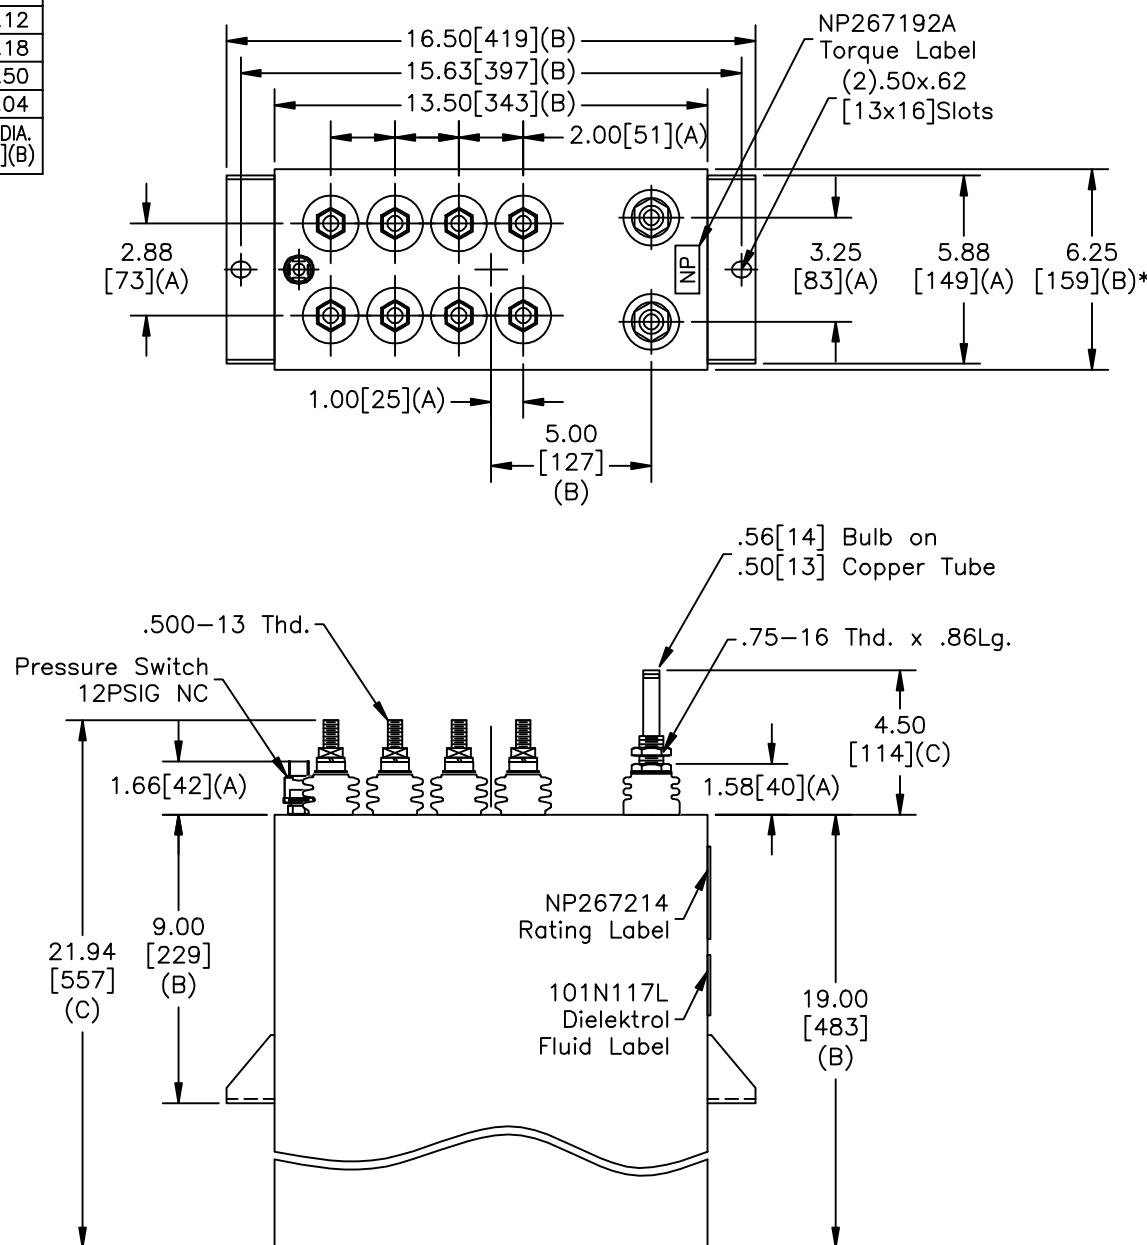

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS.

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A	Est Weight 88 lbs.		OUTLINE 19L1046WH4	
DRAWN	DATE 11/6/1996	SCALE	WC15			
ISSUED	DATE 11/6/1996				SHEET 2	CONT ON 3

DISTR. TO