
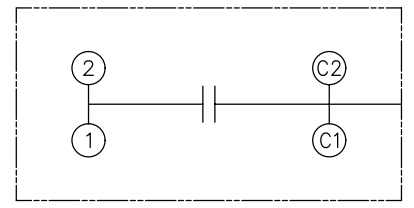


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

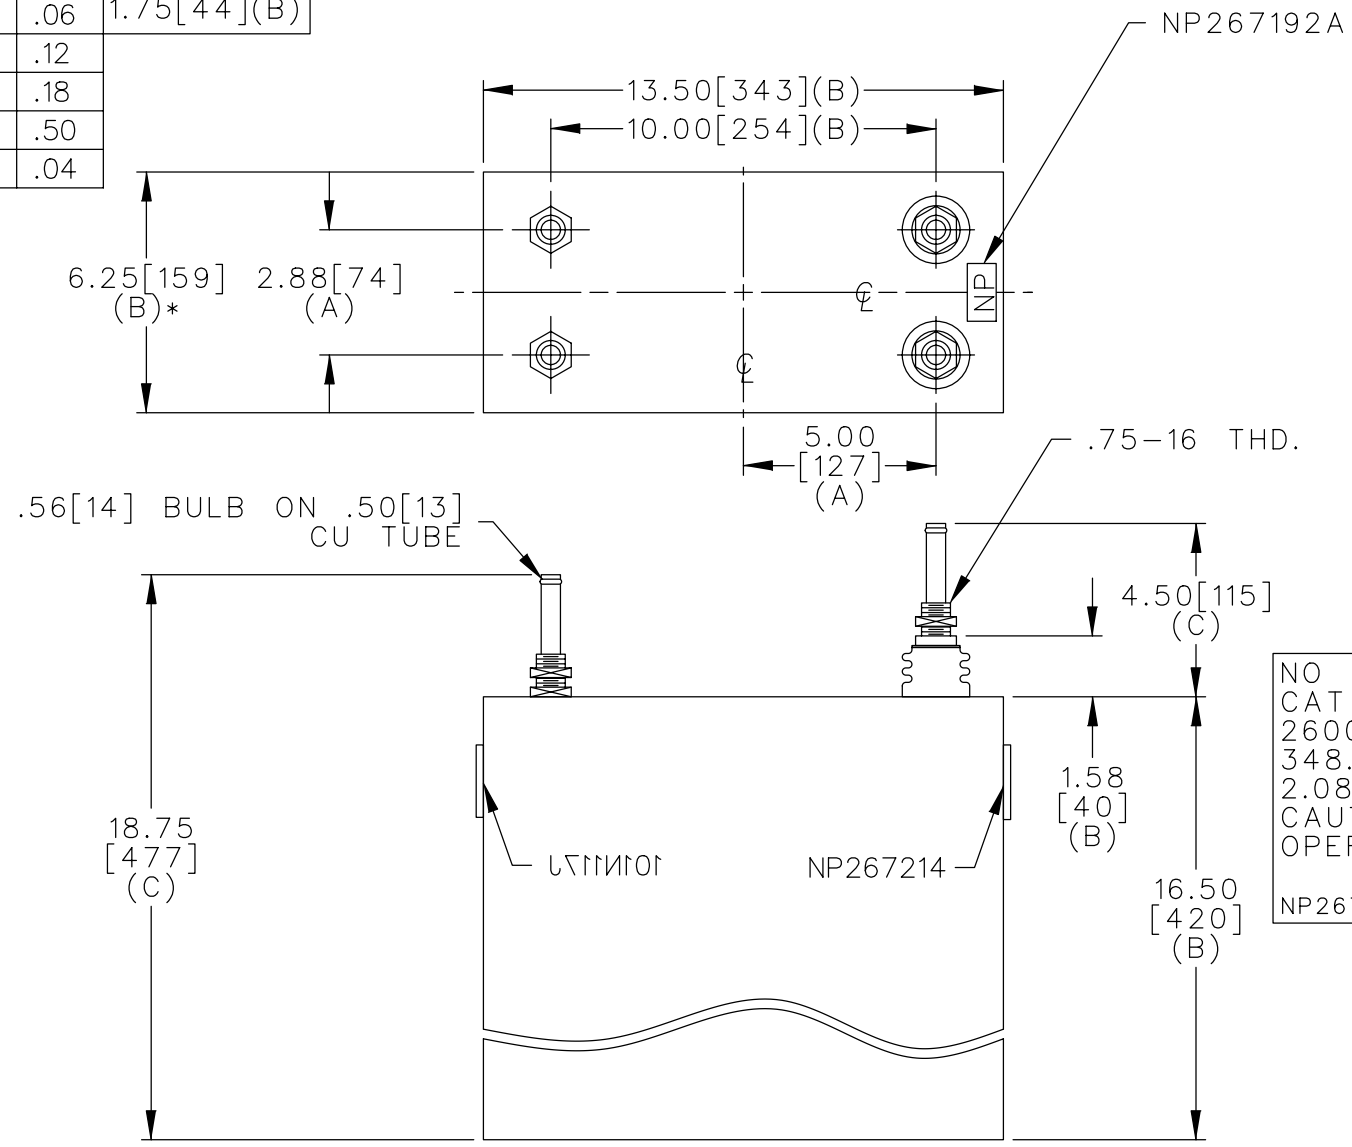

NO INTERNAL DISCH RESISTORS  
 CAT 19L1048WH1 SN  
 2600KVAR 1090V 1000HZ 1PH  
 348.3 UF/TAP  
 2.08 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 68 / 31 LB/KG	<b>OUTLINE</b> <b>19L1048WH1</b>	SHEET 2 CONT. 3 ON ON
	DRAWN 11/07/96	LRD 11/07/96	SCALE WC8	version		
ISSUED						

DISTR TO