



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

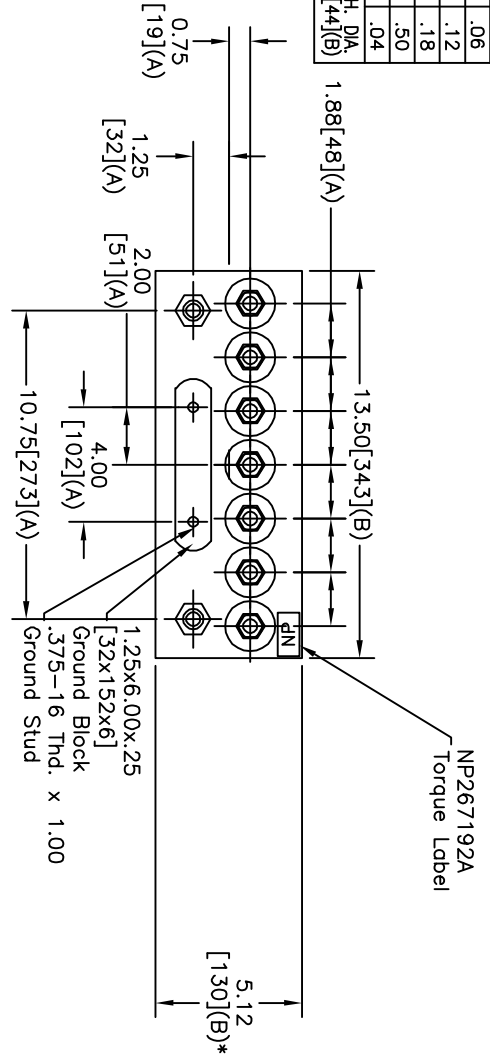


TERM	UF	KVAR
1	2.5	141.43
2	2.5	141.43
3	2.5	141.43
4	2.5	141.43
5	2.5	141.43
6	2.5	141.43
7	2.5	141.43

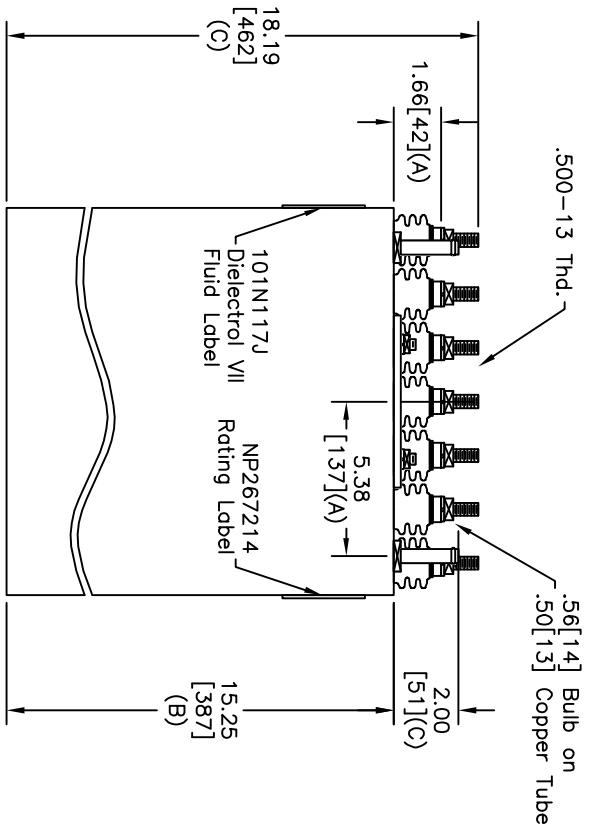

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS. NP267192A

REV	DESCRIPTION	DATE	APPROVED
1	RE DRAW	9/26/2006	BTR



NO INTERNAL DISCH RESISTORS
 CAT. 19L1050WH2 SN
 990KVAR 600V 25000HZ 1PH
 7x2.5UF/TAP
 2.2 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 MADE IN USA NP267214

GE ENERGY
 FORT EDWARD, N.Y., U.S.A.
 DRAWN P. COLE
 DATE 8/28/1997
 ISSUED DATE 9/3/1997

SIZE A
 SCALE
 WC9
 SHEET 2 CONT ON

OUTLINE
 19L1050WH2