



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

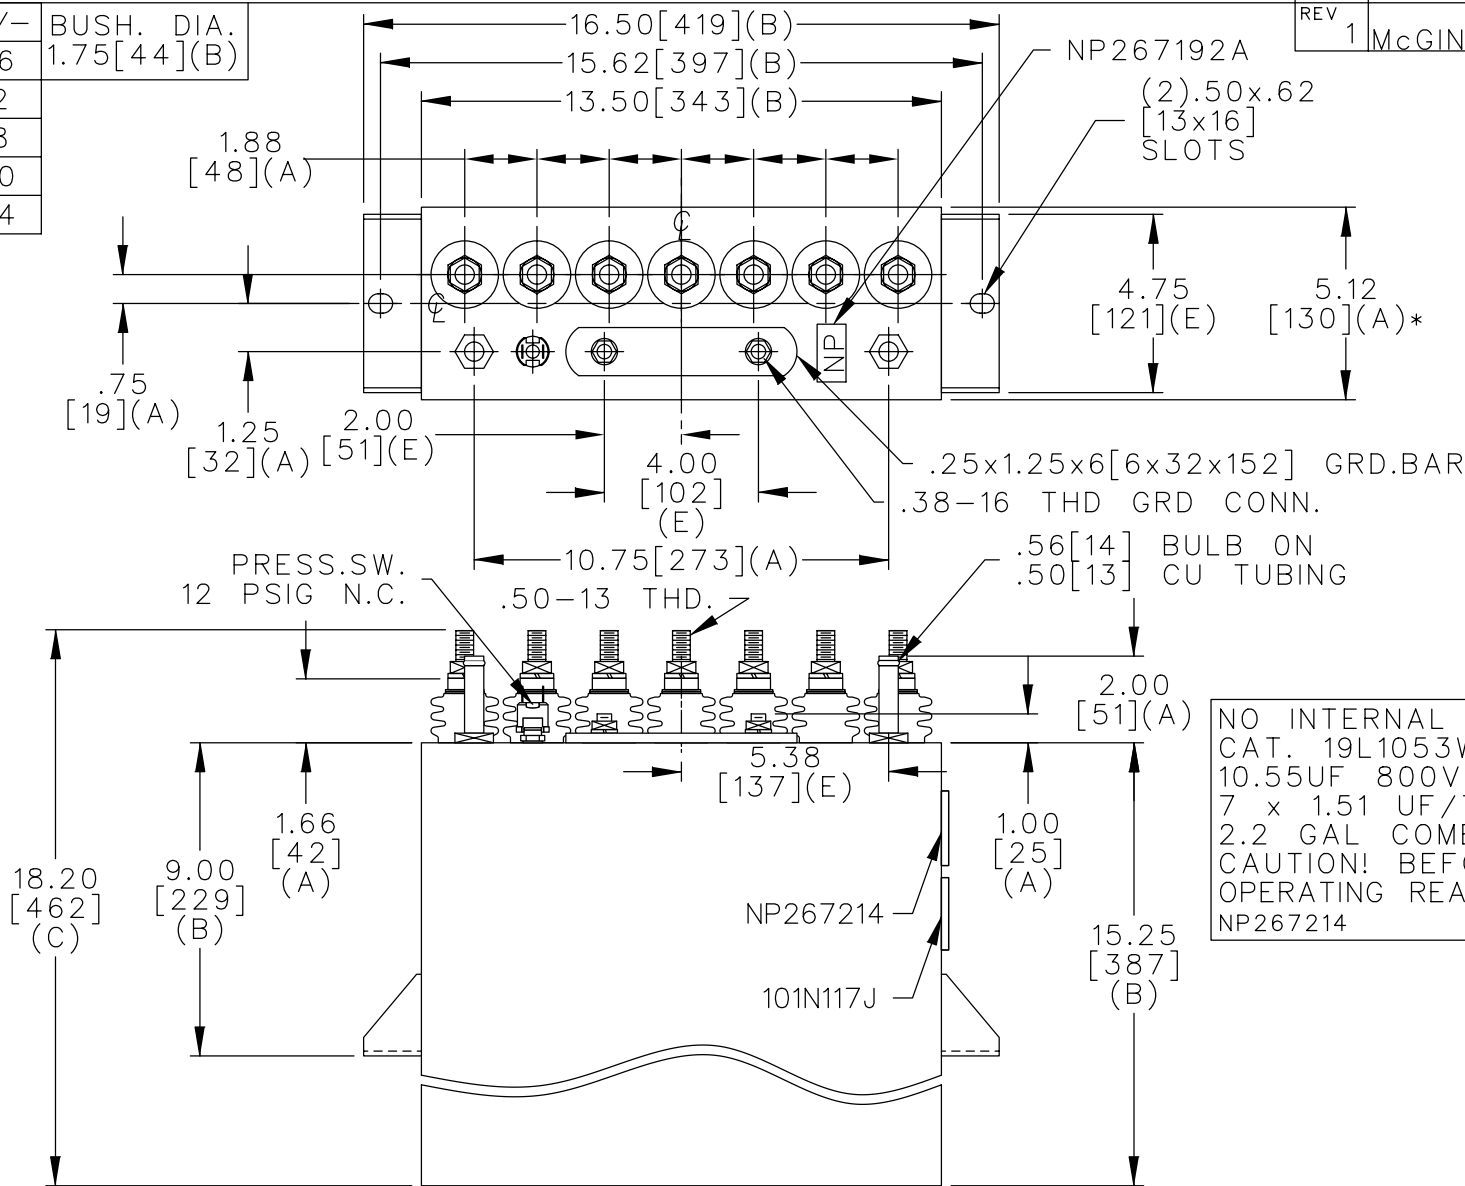

TERM	uF	kVAR
1	1.51	179.5
2	1.51	179.5
3	1.51	179.5
4	1.51	179.5
5	1.51	179.5
6	1.51	179.5
7	1.51	179.5

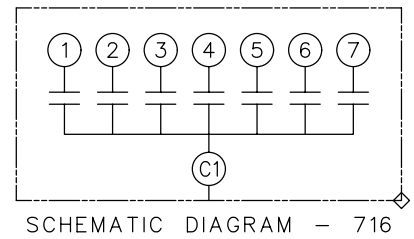

NO INTERNAL DISCH RESISTORS
 CAT. 19L1053WH4 SN
 10.55UF 800V HZ 1PH
 7 x 1.51 UF/TAP MAX 1850 AMPS
 2.2 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1053WH4	
	DRAWN E.McGINN	SEPT. 11, 1996	SCALE		
ISSUED	9-18-96		SHEET 2	CONT. ON -	DISTR TO