
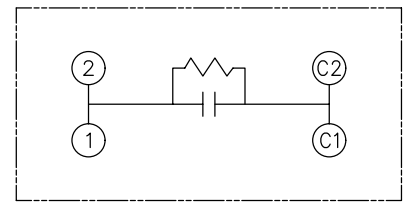


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

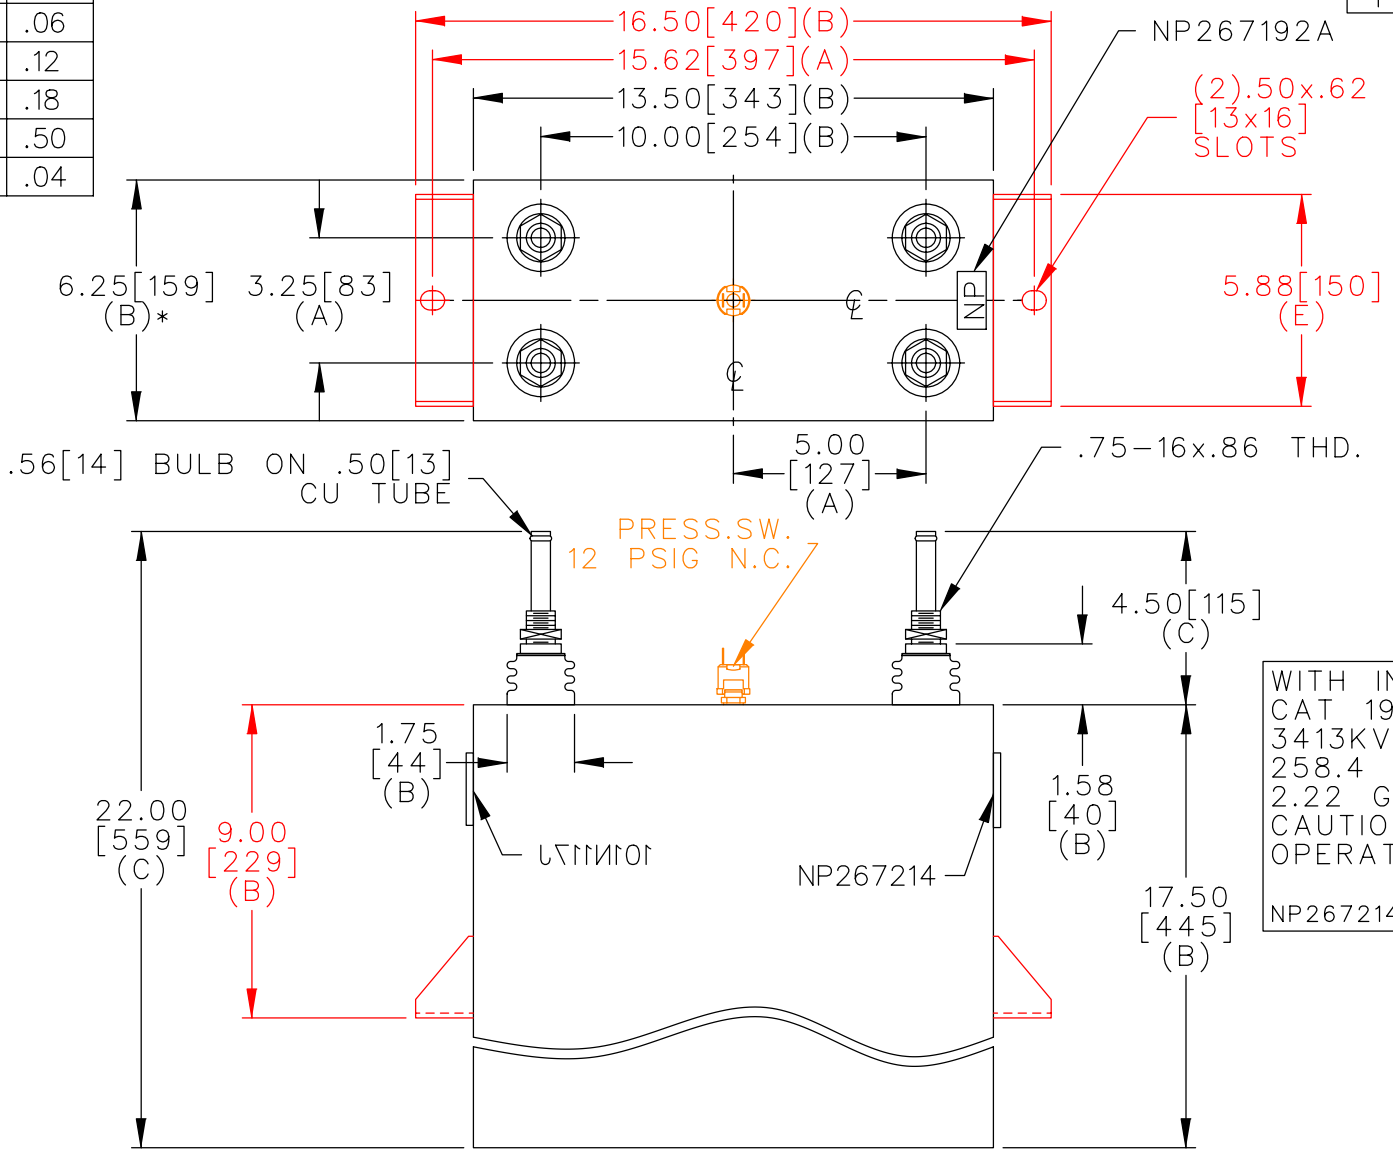

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS
 CAT 19L1058WH4 SN
 3413KVAR 1450V 1000HZ 1PH
 258.4 UF/TAP
 2.22 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 72 / 33 LB/KG	OUTLINE 19L1058WH4	SHEET 2 CONT. 3
	DRAWN 10/28/96	LRD 10/28/96	SCALE WC1	version		
ISSUED						ON 3

DISTR TO