

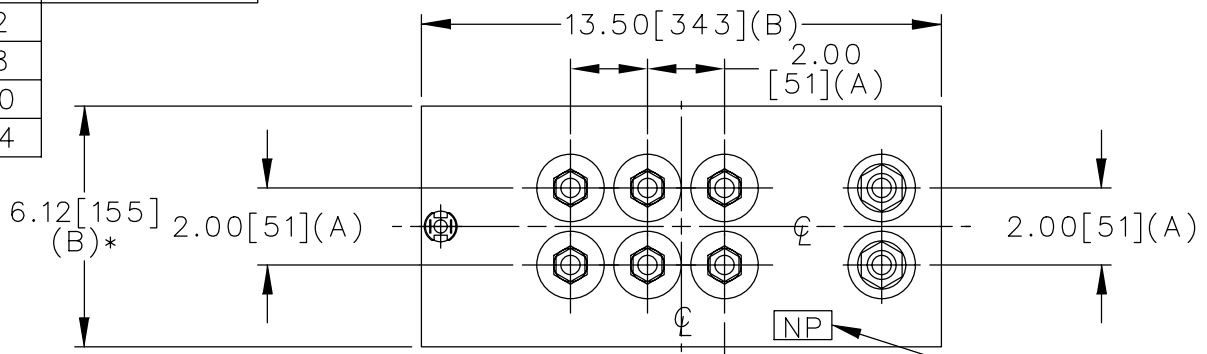


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

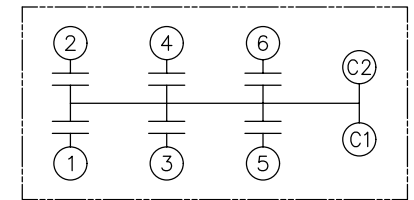


TERM	KVAR
1	370.3
2	370.3
3	370.3
4	370.3
5	370.3
6	370.3

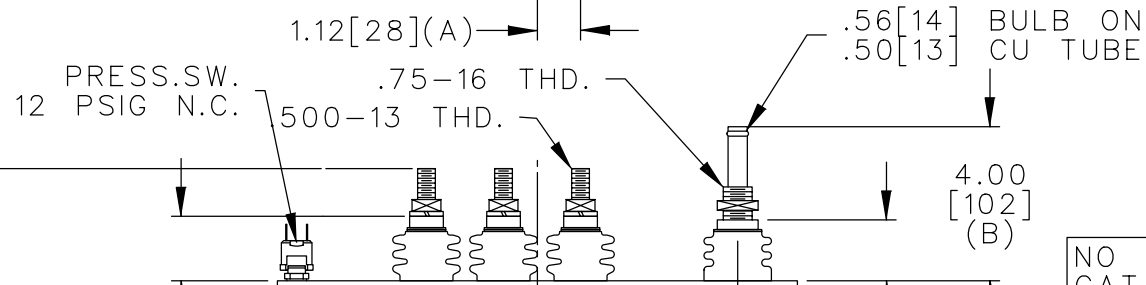

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1062WH2 SN  
 2222KVAR 2400V 1000HZ 1PH  
 6X10.23 UF/TAP  
 2.2 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

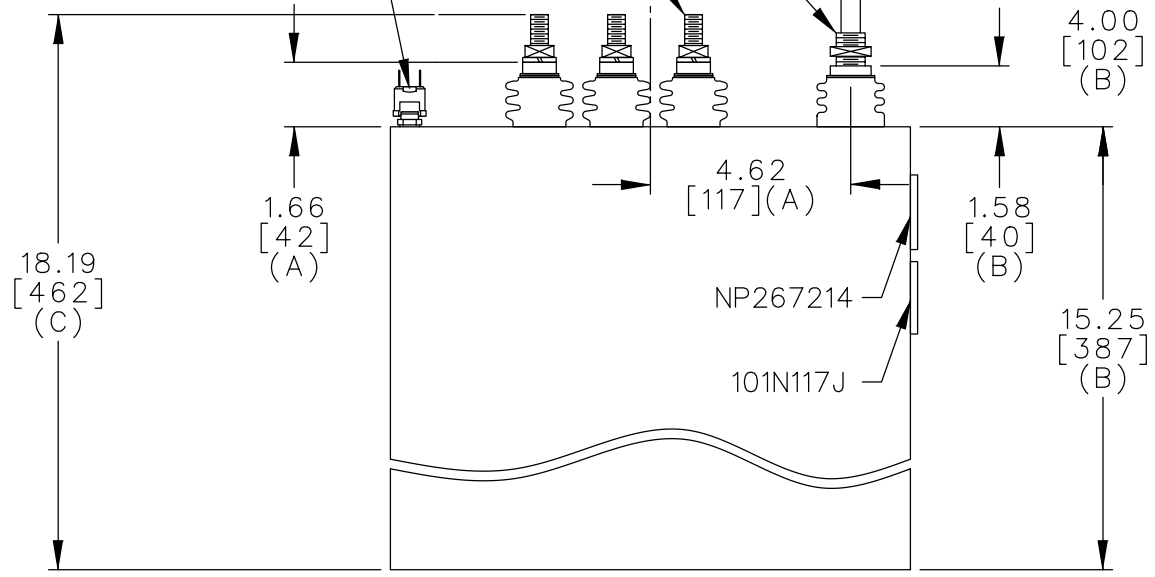

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L1062WH2</b>	SHEET 2 CONT. ON
	DRAWN E.McGINN	NOV. 15, 1996	SCALE		