



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

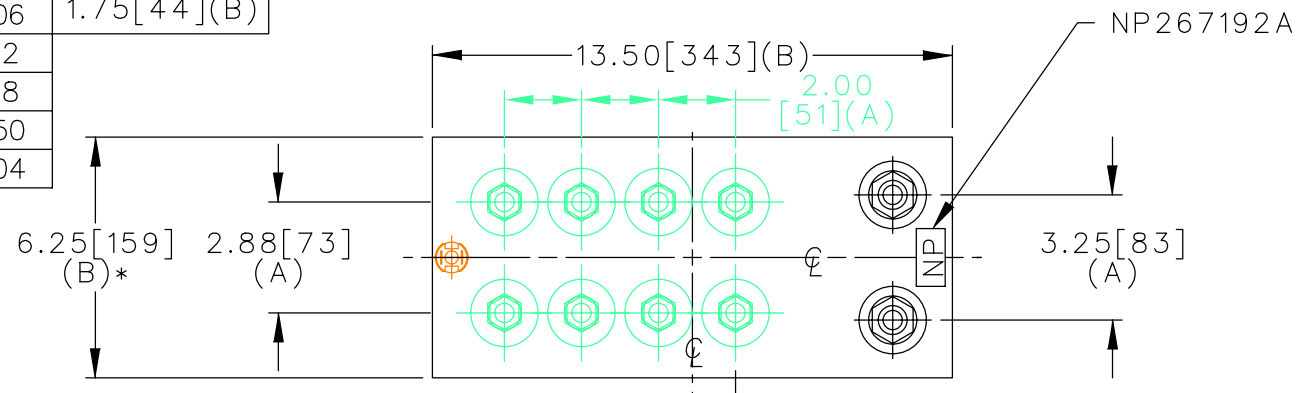

TERM	uF	kVAR
1	27.63	250
2	27.63	250
3	27.63	250
4	27.63	250
5	27.63	250
6	27.63	250
7	27.63	250
8	27.63	250

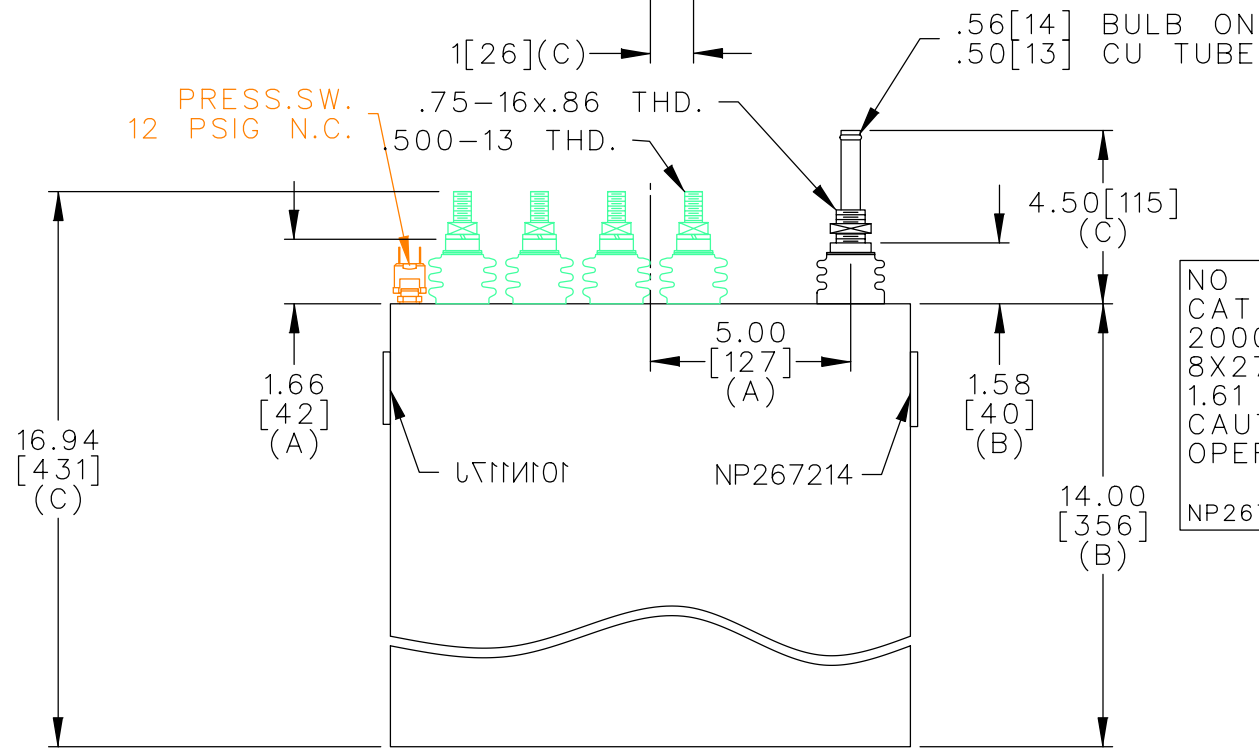

NO INTERNAL DISCH RESISTORS
 CAT 19L1065WH2 SN
 2000KVAR 1200V 1000HZ 1PH
 8X27.63 UF/TAP
 1.61 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 73 / 33 LB/KG	<h1>OUTLINE</h1> <h2>19L1065WH2</h2>	SHEET 2 CONT. 3 ON ON
	DRAWN 12/05/96	LRD 12/05/96	SCALE WC7	version		
ISSUED						

DISTR TO