



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

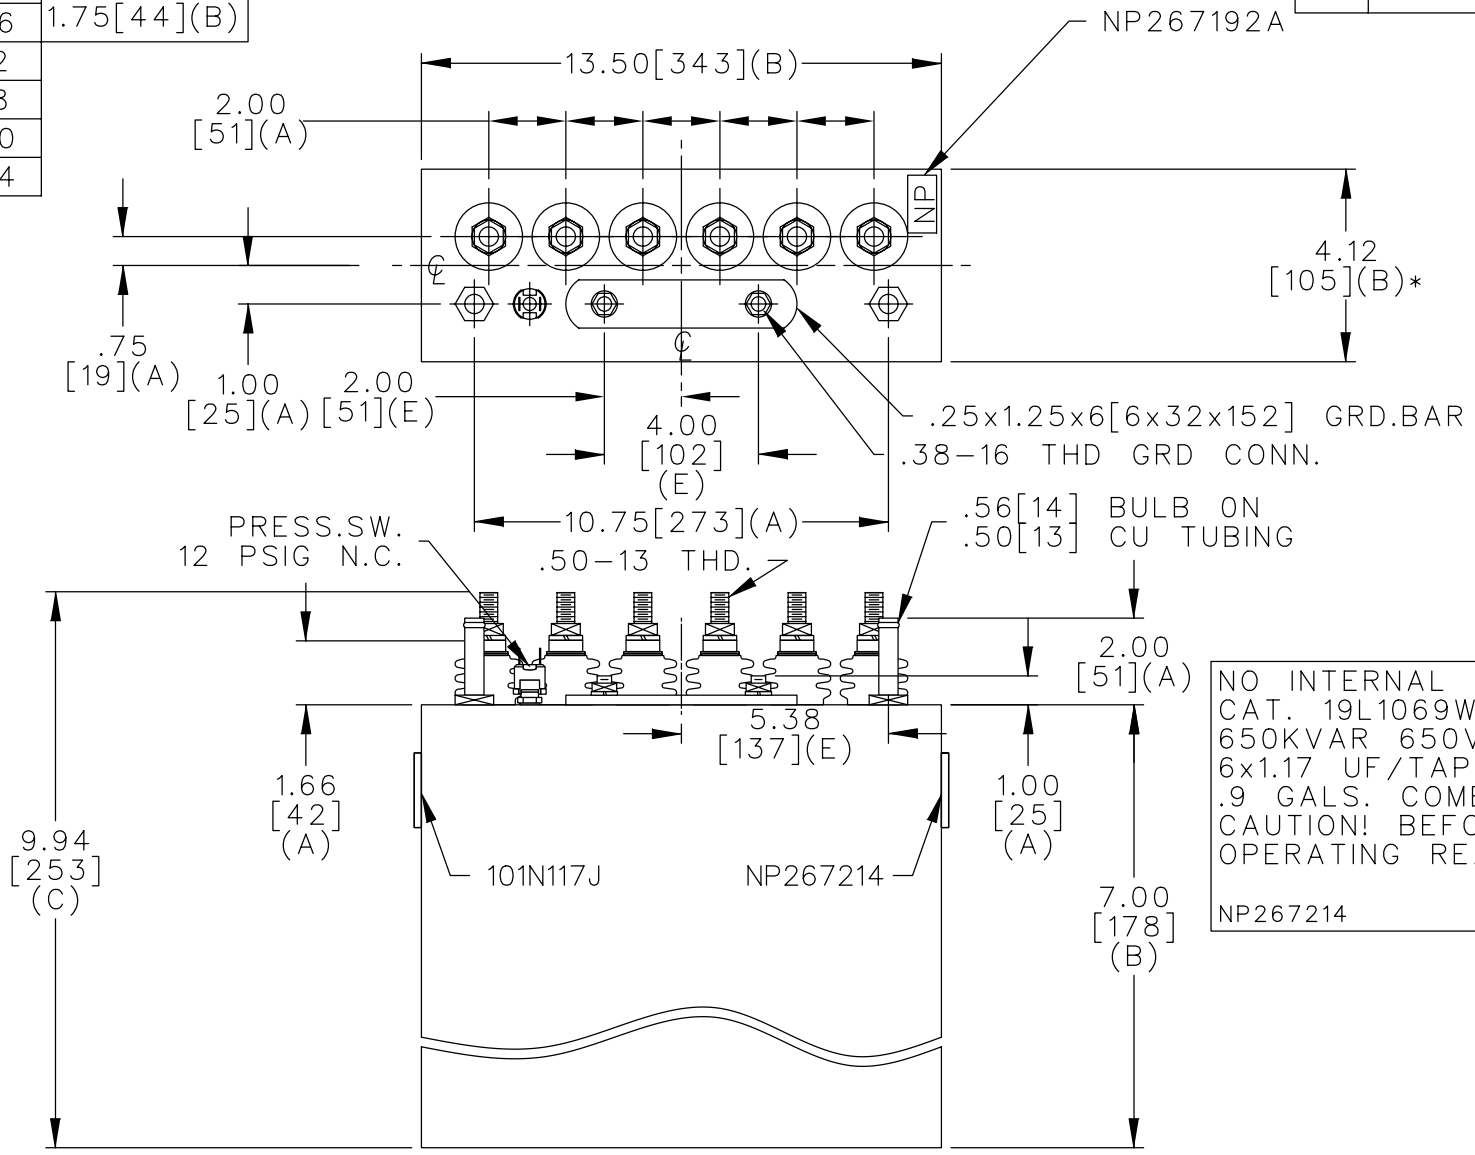

TERM	uF	kVAR
1	1.17	166.7
2	1.17	166.7
3	1.17	166.7
4	1.17	166.7
5	1.17	166.7
6	1.17	166.7

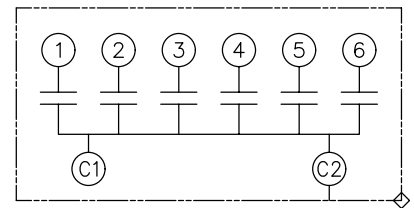

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L1069WH2 SN
 650KVAR 650V 35000HZ 1PH
 6x1.17 UF/TAP
 .9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1069WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	FEB. 4, 1997			
ISSUED				DISTR TO	