



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

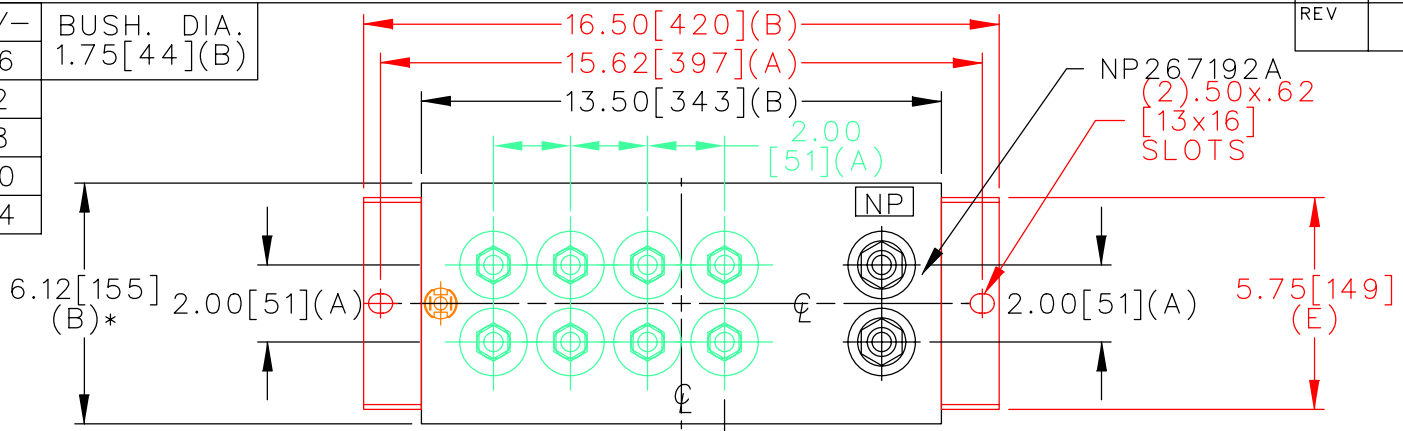


TERM	uF	kVAR
1	22.9	269.8
2	22.9	269.8
3	22.9	269.8
4	22.9	269.8
5	22.9	269.8
6	22.9	269.8
7	22.9	269.8
8	22.9	269.8

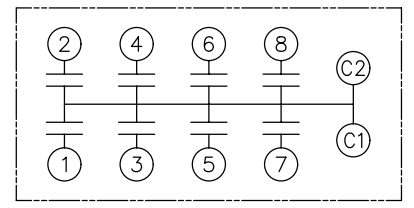

SCHEMATIC DIAGRAM - 800

PRESS.SW.
12 PSIG N.C.

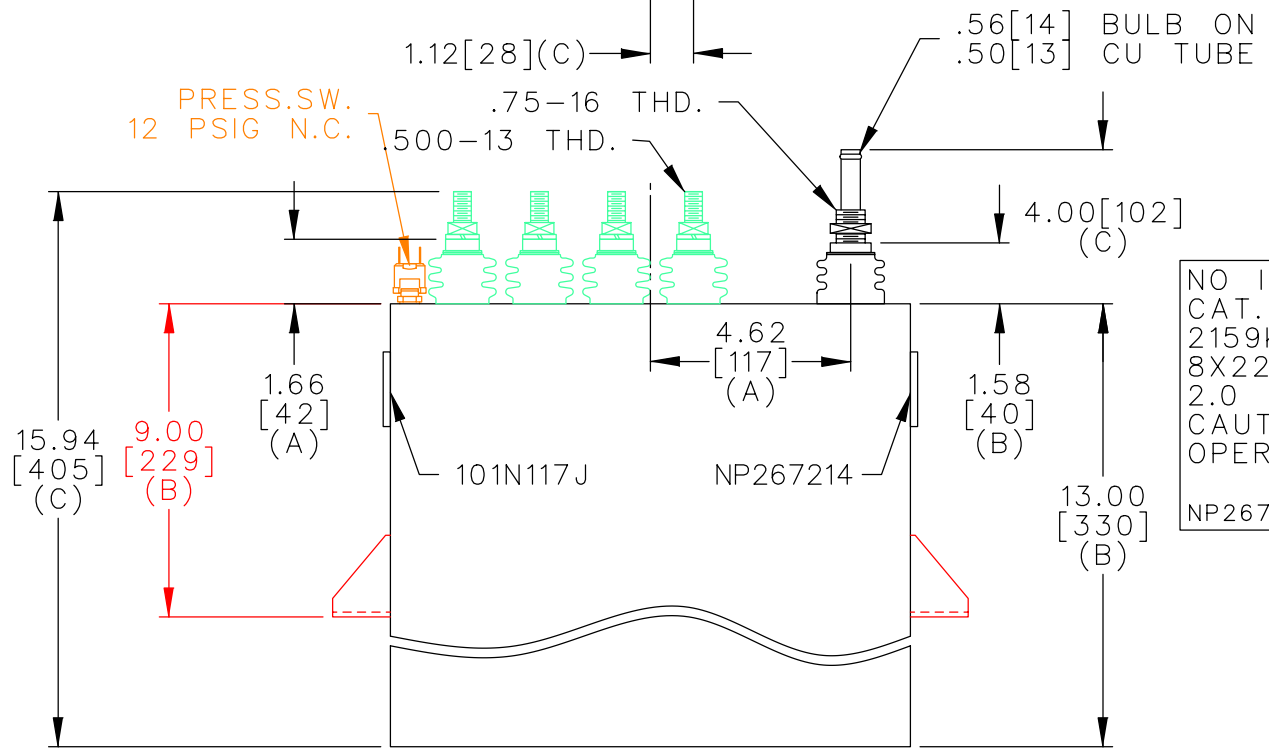

NO INTERNAL DISCH RESISTORS
 CAT. 19L1070WH4 SN
 2159KVAR 1250V 1200HZ 1PH
 8X22.9 UF/TAP
 2.0 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1070WH4	SHEET 2 CONT. ON
	DRAWN E.McGINN	JAN. 27, 1997	SCALE		
ISSUED					

DISTR TO