



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

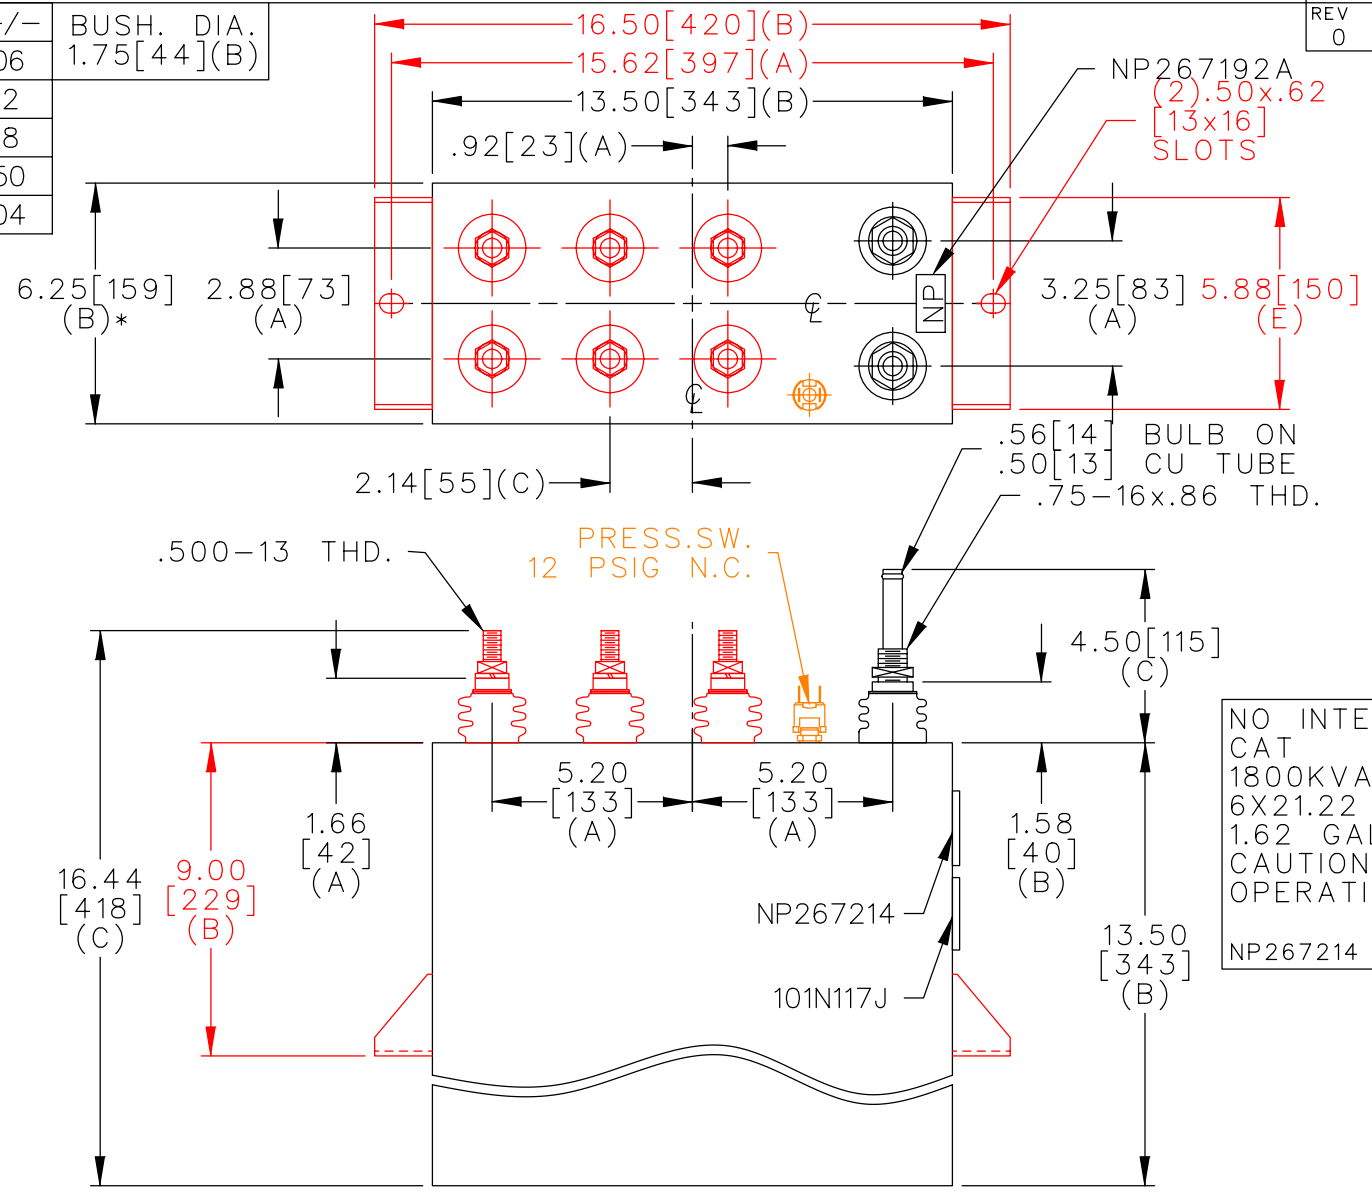

TERM	uF	kVAR
1	21.22	300
2	21.22	300
3	21.22	300
4	21.22	300
5	21.22	300
6	21.22	300

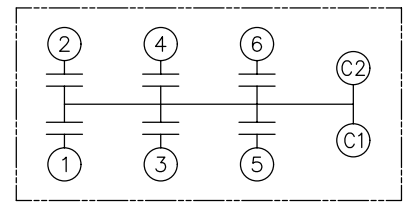

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT 19L1073WH4 SN
 1800KVAR 1500V 1000HZ 1PH
 6X21.22 UF/TAP
 1.62 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 71 / 32 LB/KG	OUTLINE 19L1073WH4	DISTR TO
	DRAWN 02/12/97	LRD 02/12/97	SCALE WC6	version		
ISSUED						