



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH. DIA.
1.75 [44] (B)

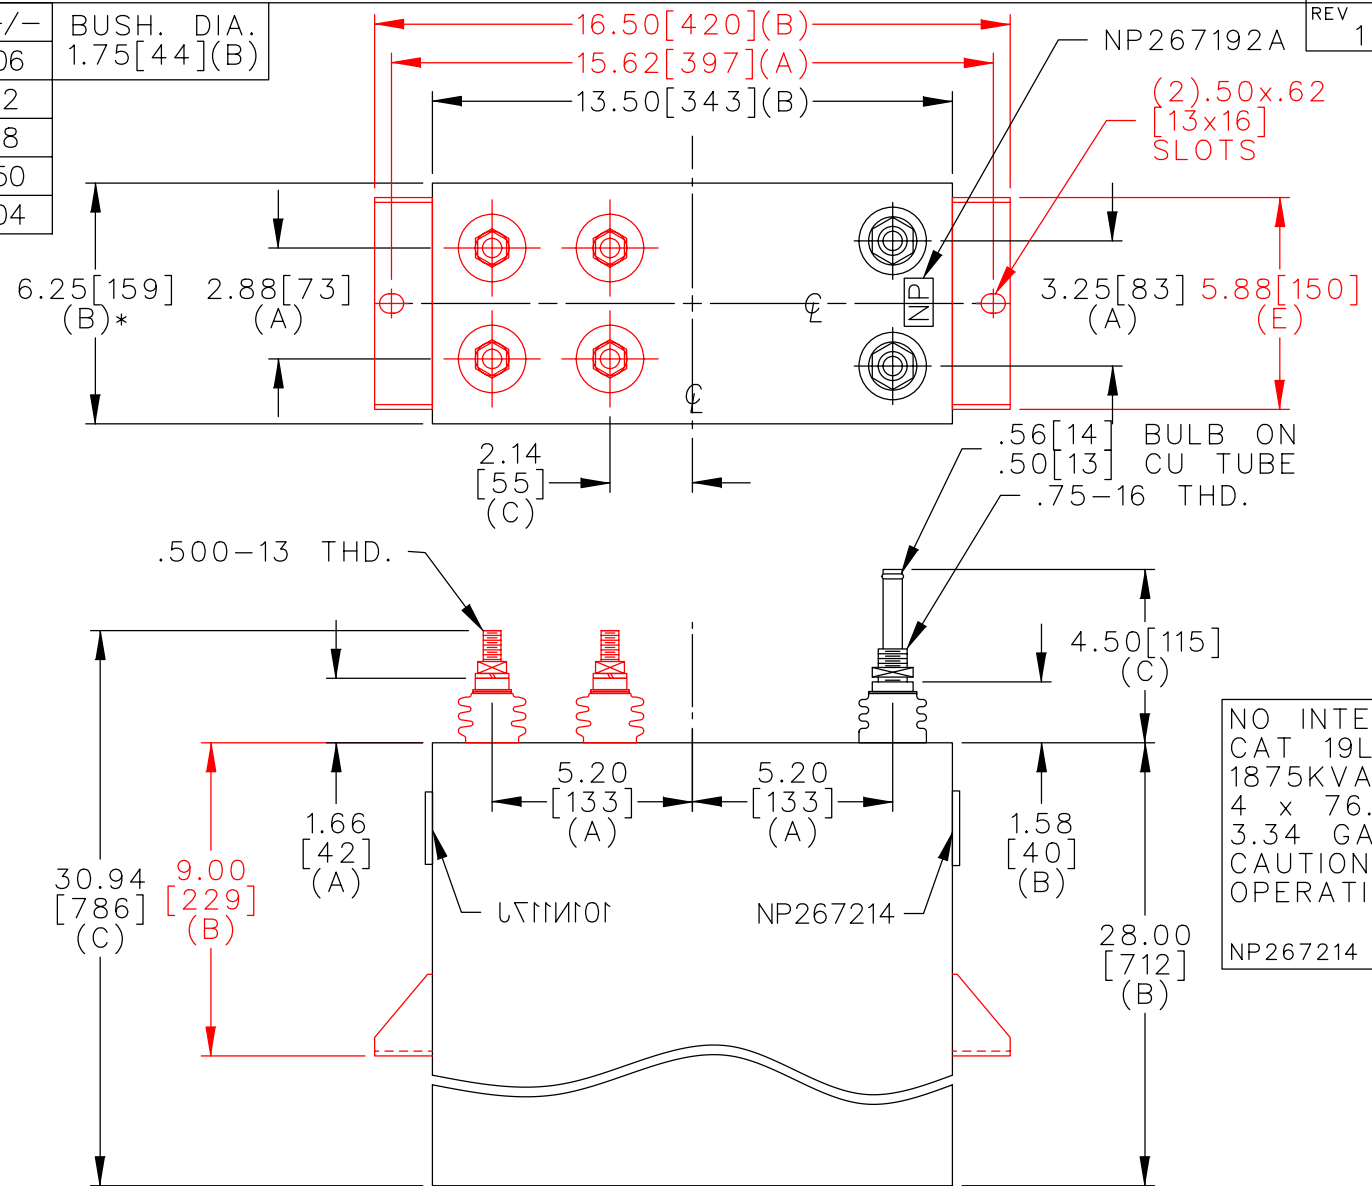

TERM	uF	kVAR
1	76.75	468.7
2	76.75	468.7
3	76.75	468.7
4	76.75	468.7

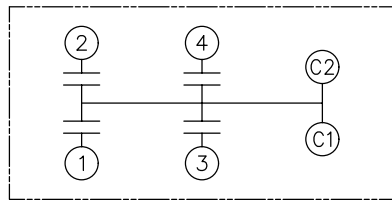

NO INTERNAL DISCH RESISTORS
 CAT 19L1075WH3 SN
 1875KVAR 1800V 300HZ 1PH
 4 x 76.75 UF/TAP
 3.34 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 112 / 51 LB/KG	OUTLINE 19L1075WH3	SHEET 2 CONT. 3 ON ON
	DRAWN TMO	FEB 26, 1997	SCALE	DISTR TO		
ISSUED	3-5-97					