



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	


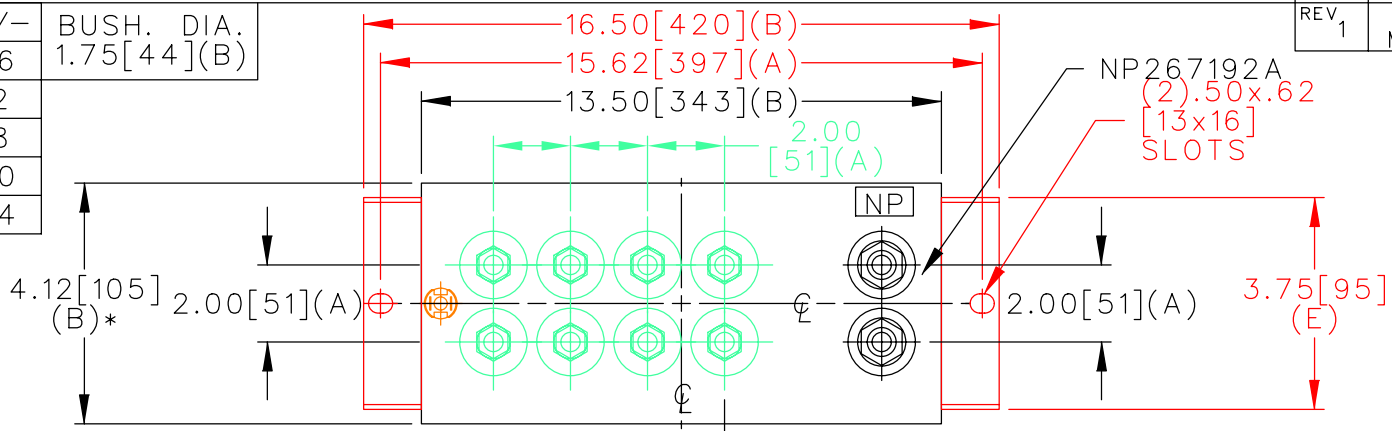


TERM	uF	kVAR
1	3.82	375
2	3.82	375
3	3.82	375
4	3.82	375
5	3.82	375
6	3.82	375
7	3.82	375
8	3.82	375

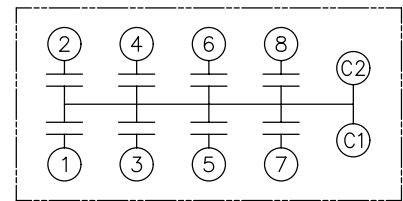

SCHEMATIC DIAGRAM - 800

PRESS.SW.
12 PSIG N.C.

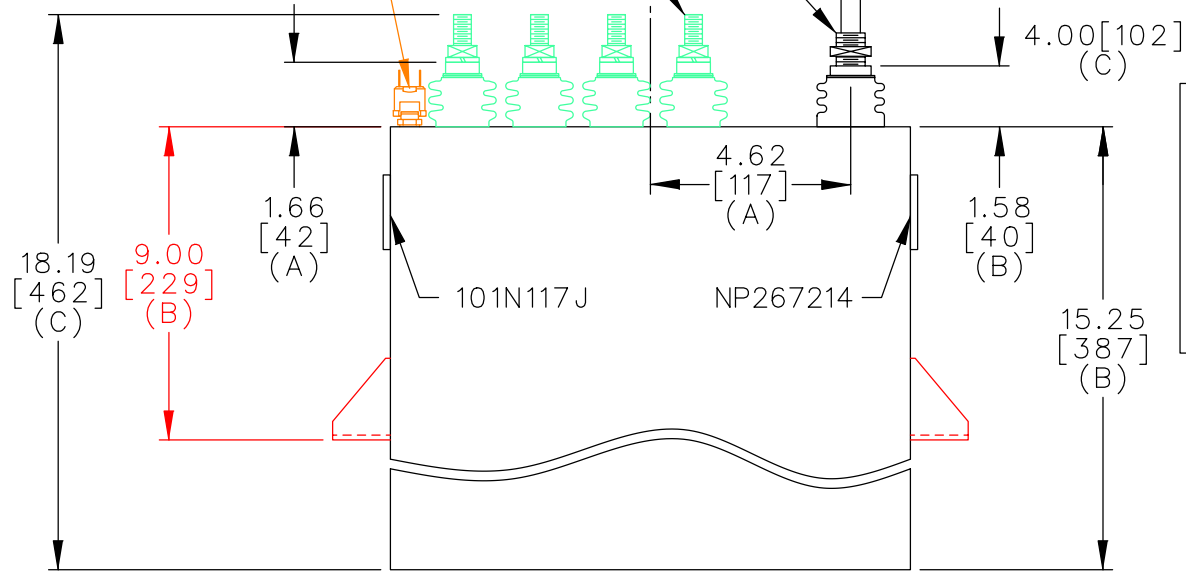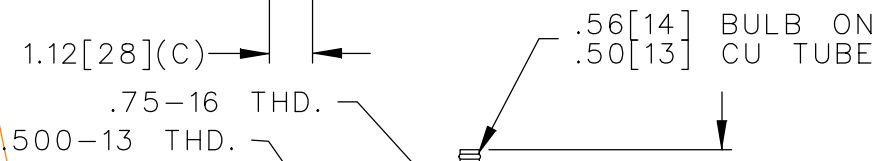

NO INTERNAL DISCH RESISTORS
 CAT. 19L1076WH4 SN
 3000KVAR 1250V 10000HZ 1PH
 8X3.82 UF/TAP
 1.7 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1076WH4	SHEET 2 CONT. ON	
	DRAWN TMO	FEB 27, 1997				SCALE
	ISSUED	3-5-97				DISTR TO