



| | | |
|-----|-----|-------------|
| TOL | +/- | BUSH. DIA. |
| A | .06 | 1.75[44](B) |
| B | .12 | |
| C | .18 | |
| D | .50 | |
| E | .04 | |

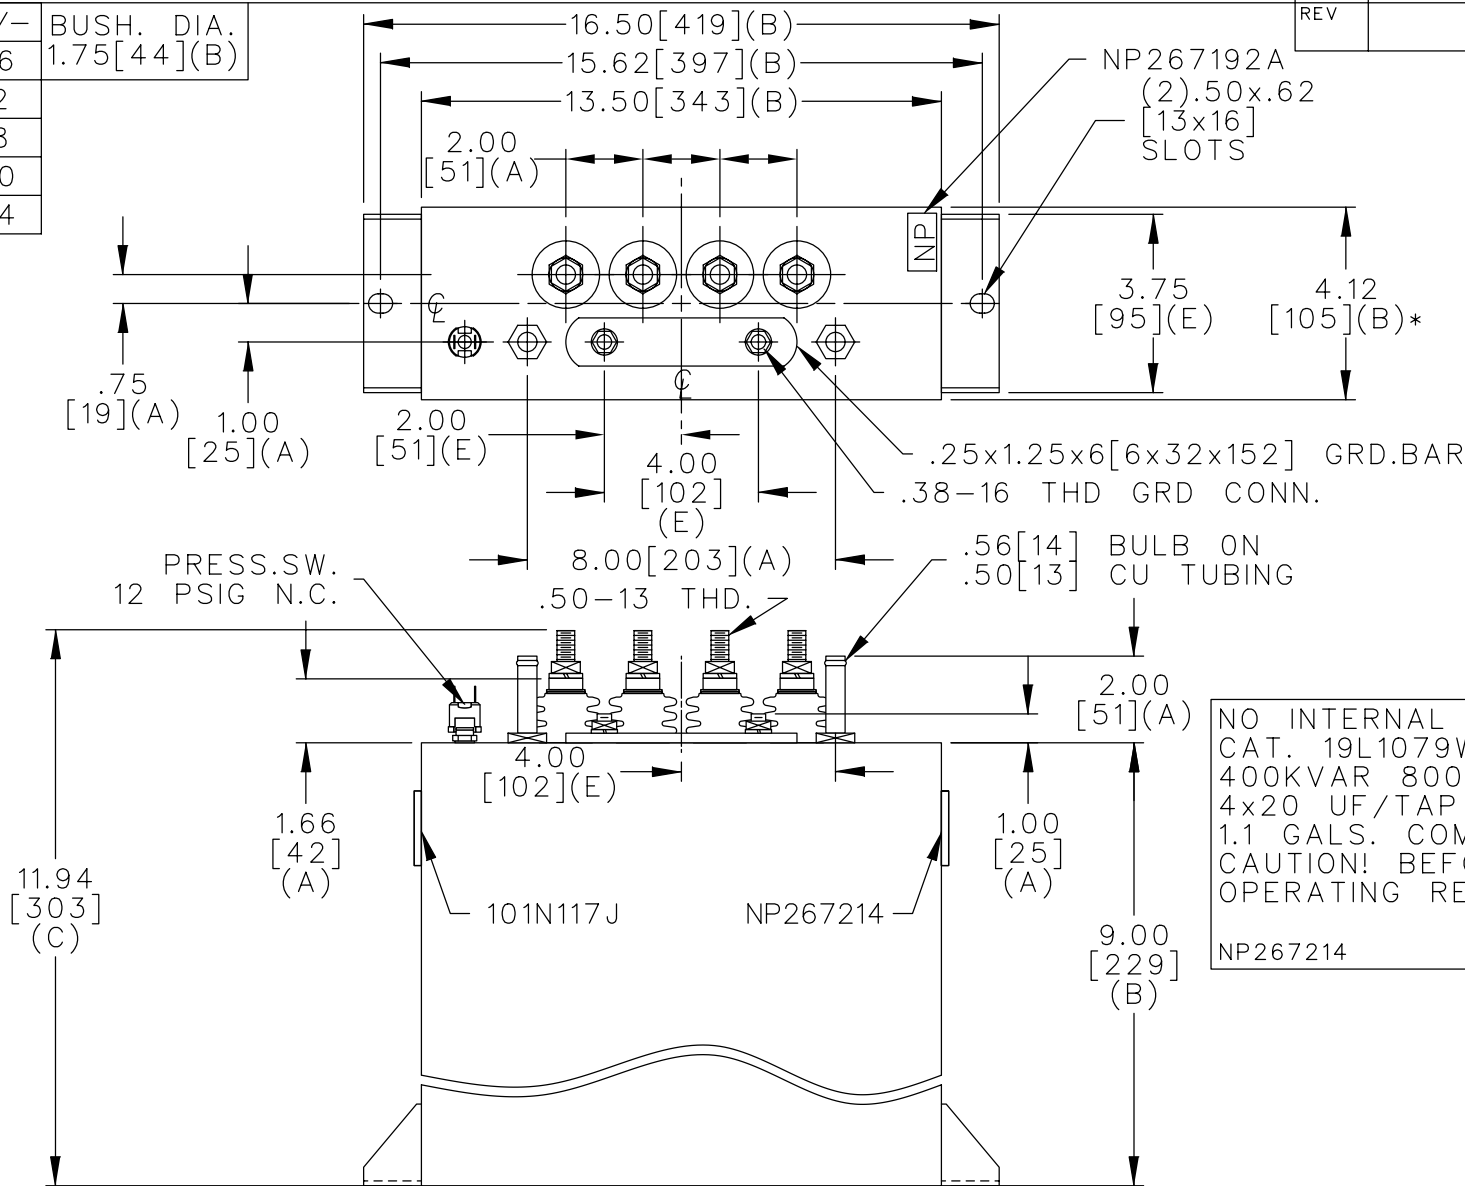

| TERM | uF | kVAR |
|------|------|------|
| 1 | 24.9 | 100 |
| 2 | 24.9 | 100 |
| 3 | 24.9 | 100 |
| 4 | 24.9 | 100 |

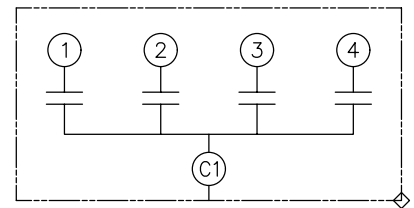

NO INTERNAL DISCH RESISTORS
 CAT. 19L1079WH4 SN
 400KVAR 800V 1000HZ 1PH
 4x20 UF/TAP
 1.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

| | | | | | | |
|--|---|--------------|------------------|----------------|-------------------------------------|--------------------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | | SIZE A | 30/14 LB/KG | OUTLINE 19L1079WH4 | SHEET 2 CONT. ON - |
| | DRAWN TMO | MAR 20, 1997 | SCALE | DISTR TO | | |