



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

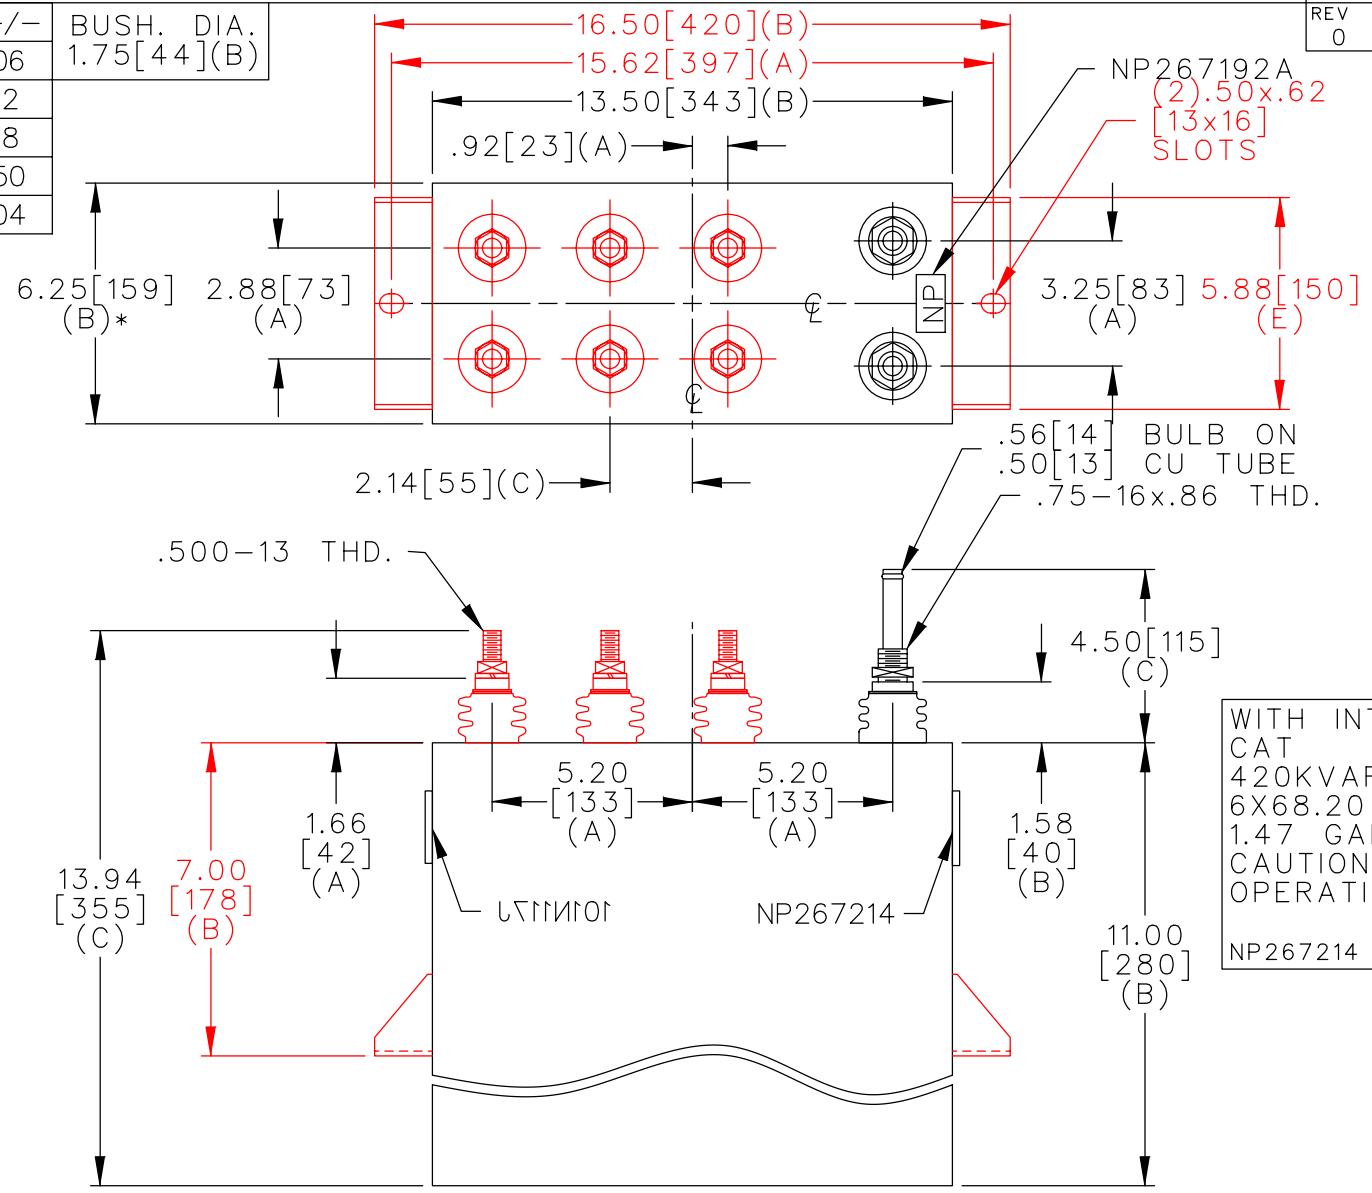

TERM	uF	kVAR
1	68.20	70
2	68.20	70
3	68.20	70
4	68.20	70
5	68.20	70
6	68.20	70

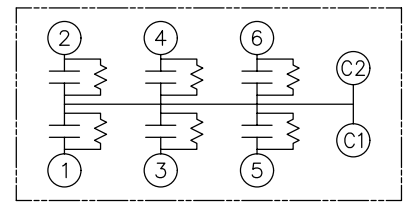

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L1083WH3 SN
 420KVAR 550V 540HZ 1PH
 6X68.20 UF/TAP
 1.47 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 52 / 24 LB/KG	OUTLINE 19L1083WH3	SHEET 2 CONT. 3 ON ON
	DRAWN 04/10/97	LRD 04/10/97	SCALE WC6	version		
ISSUED						

DISTR TO