



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

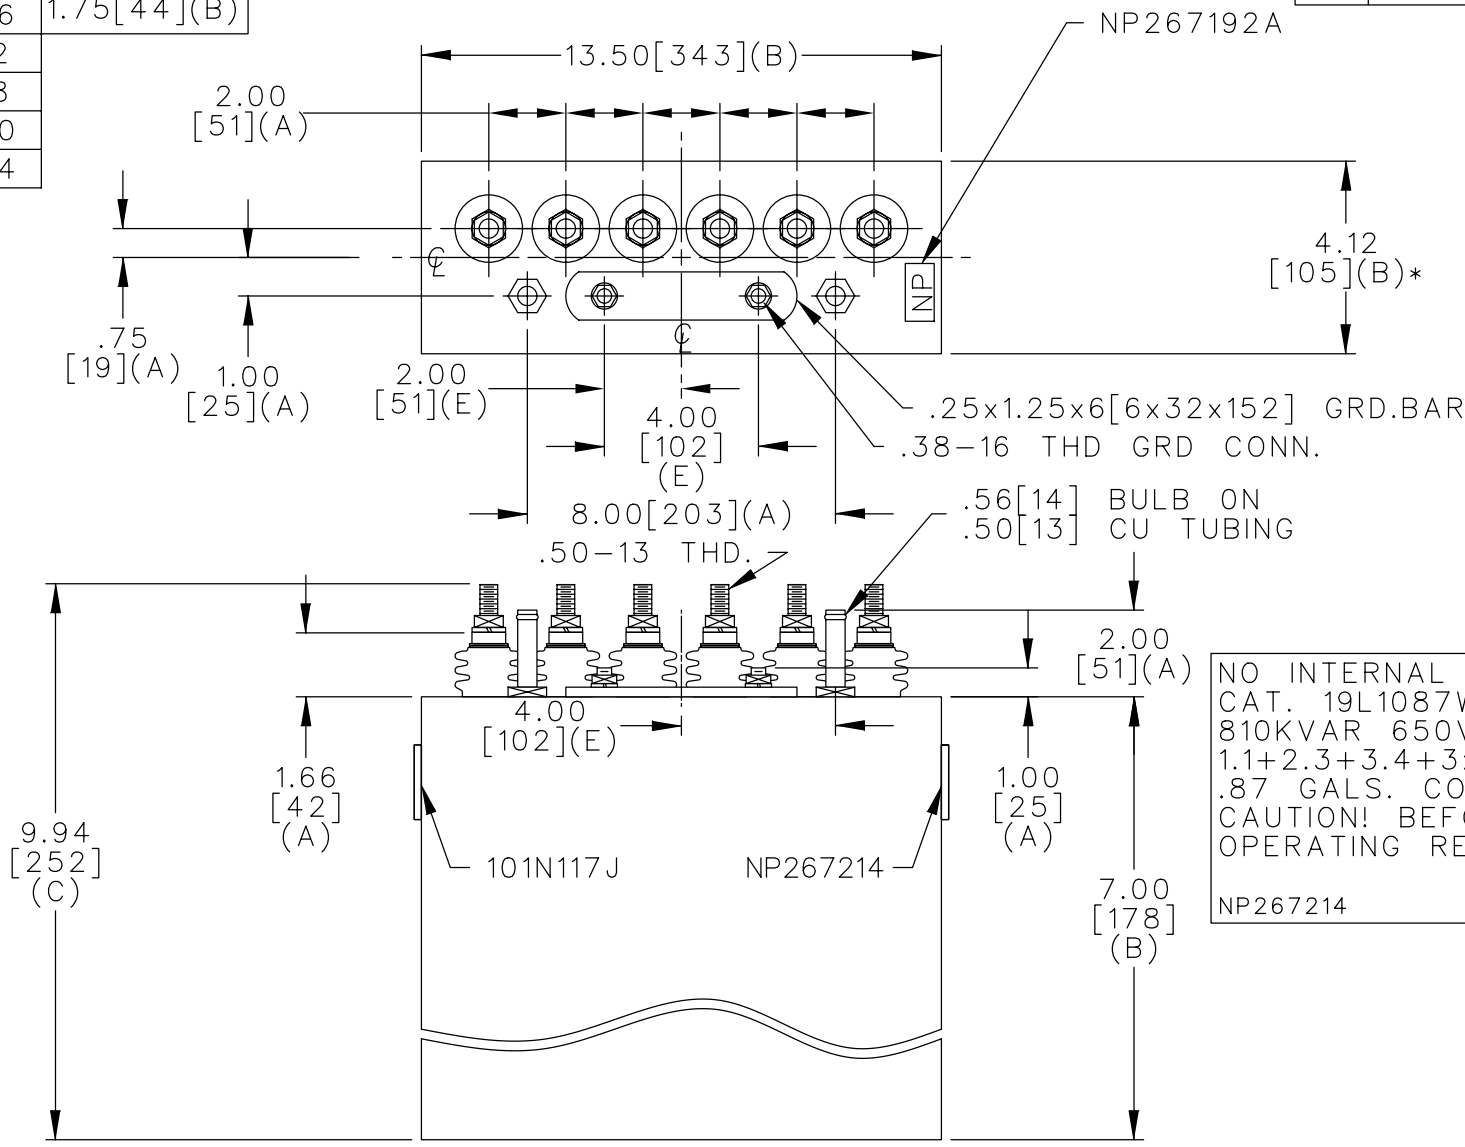

TERM	uF	kVAR
1	1.13	45
2	2.26	90
3	3.39	135
4	4.52	180
5	4.52	180
6	4.52	180

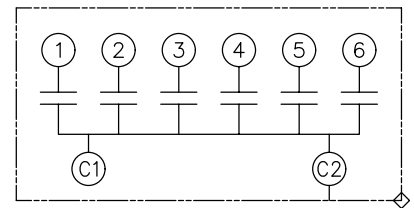

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L1087WH1 SN
 810KVAR 650V 15000HZ 1PH
 1.1+2.3+3.4+3x4.5 UF/TAP
 .87 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1087WH1	
	DRAWN E.McGINN	JUNE 5, 1997	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO