




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

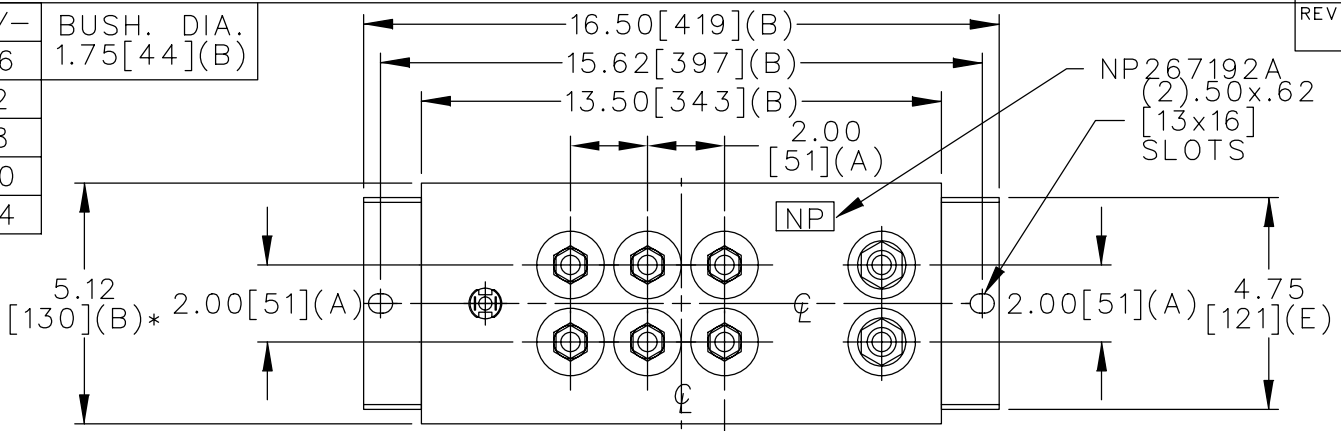

TERM	uF	kVAR
1	14.7	416.7
2	14.7	416.7
3	14.7	416.7
4	14.7	416.7
5	14.7	416.7
6	14.7	416.7

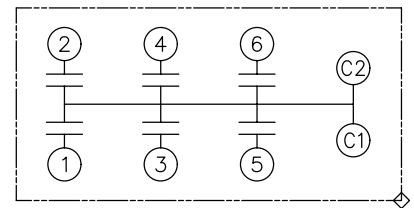

SCHEMATIC DIAGRAM - 615

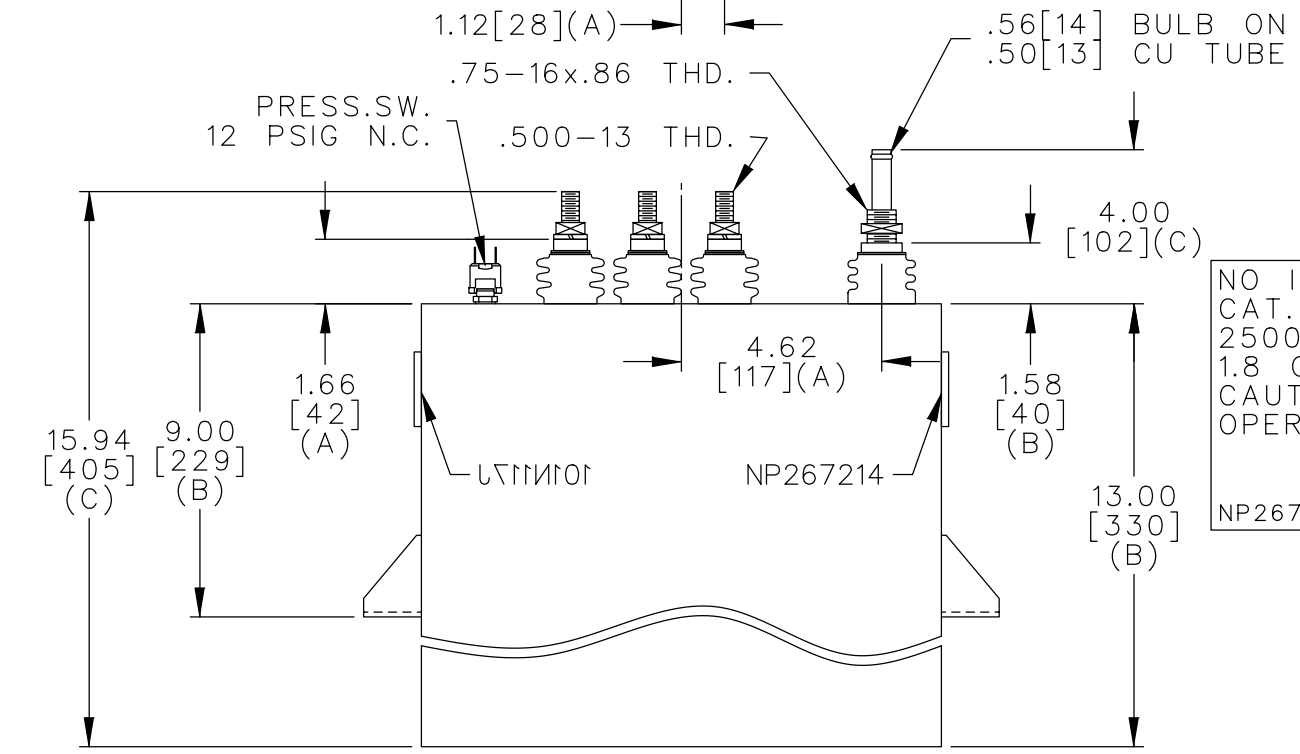

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1097WH4 SN  
 2500KVAR 1500V 2000HZ 1PH  
 1.8 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L1097WH4</b>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	OCT. 6, 1997	SCALE				
	ISSUED 10-8-97						

DISTR TO