

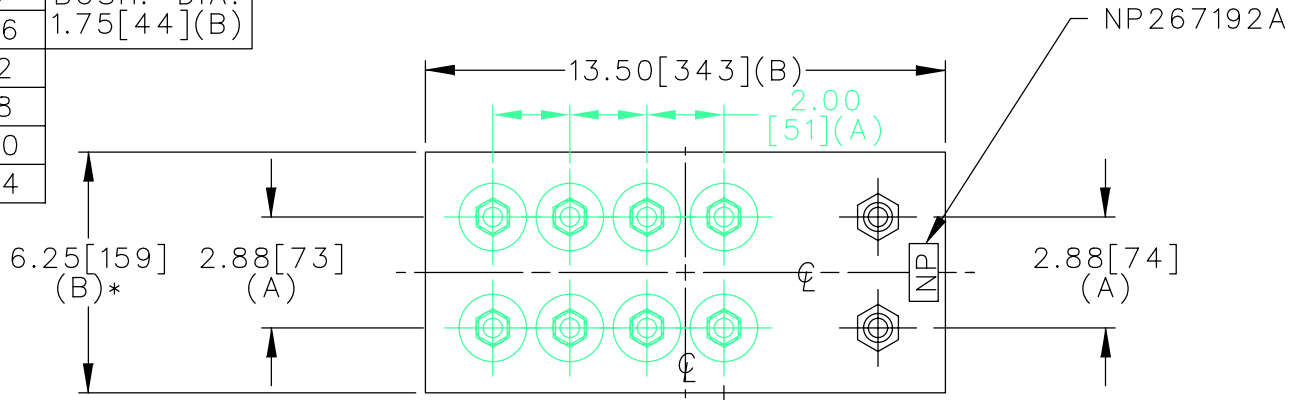


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

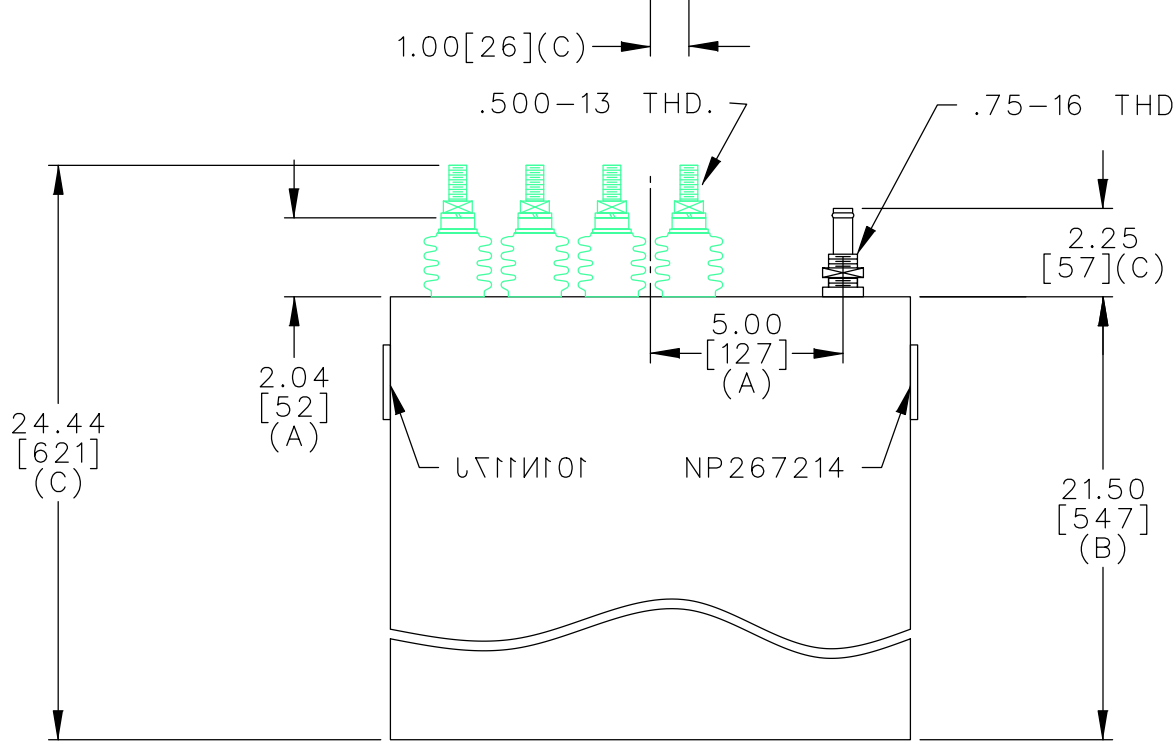

TERM	uF	kVAR
1	9.81	96.3
2	19.62	192.6
3	39.23	385.2
4	39.23	385.2
5	39.23	385.2
6	39.23	385.2
7	39.23	385.2
8	39.23	385.2

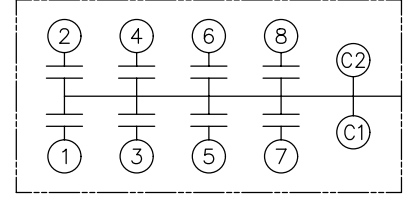

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1100WH1 SN  
 2600KVAR 1250V 1000HZ 1PH  
 9.8+19.6+6X39.2 UF/TAP  
 2.55 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 95 / 43 LB/KG	<b>OUTLINE</b> <b>19L1100WH1</b>	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	OCT. 20, 1997	SCALE	DISTR TO		
ISSUED						