



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

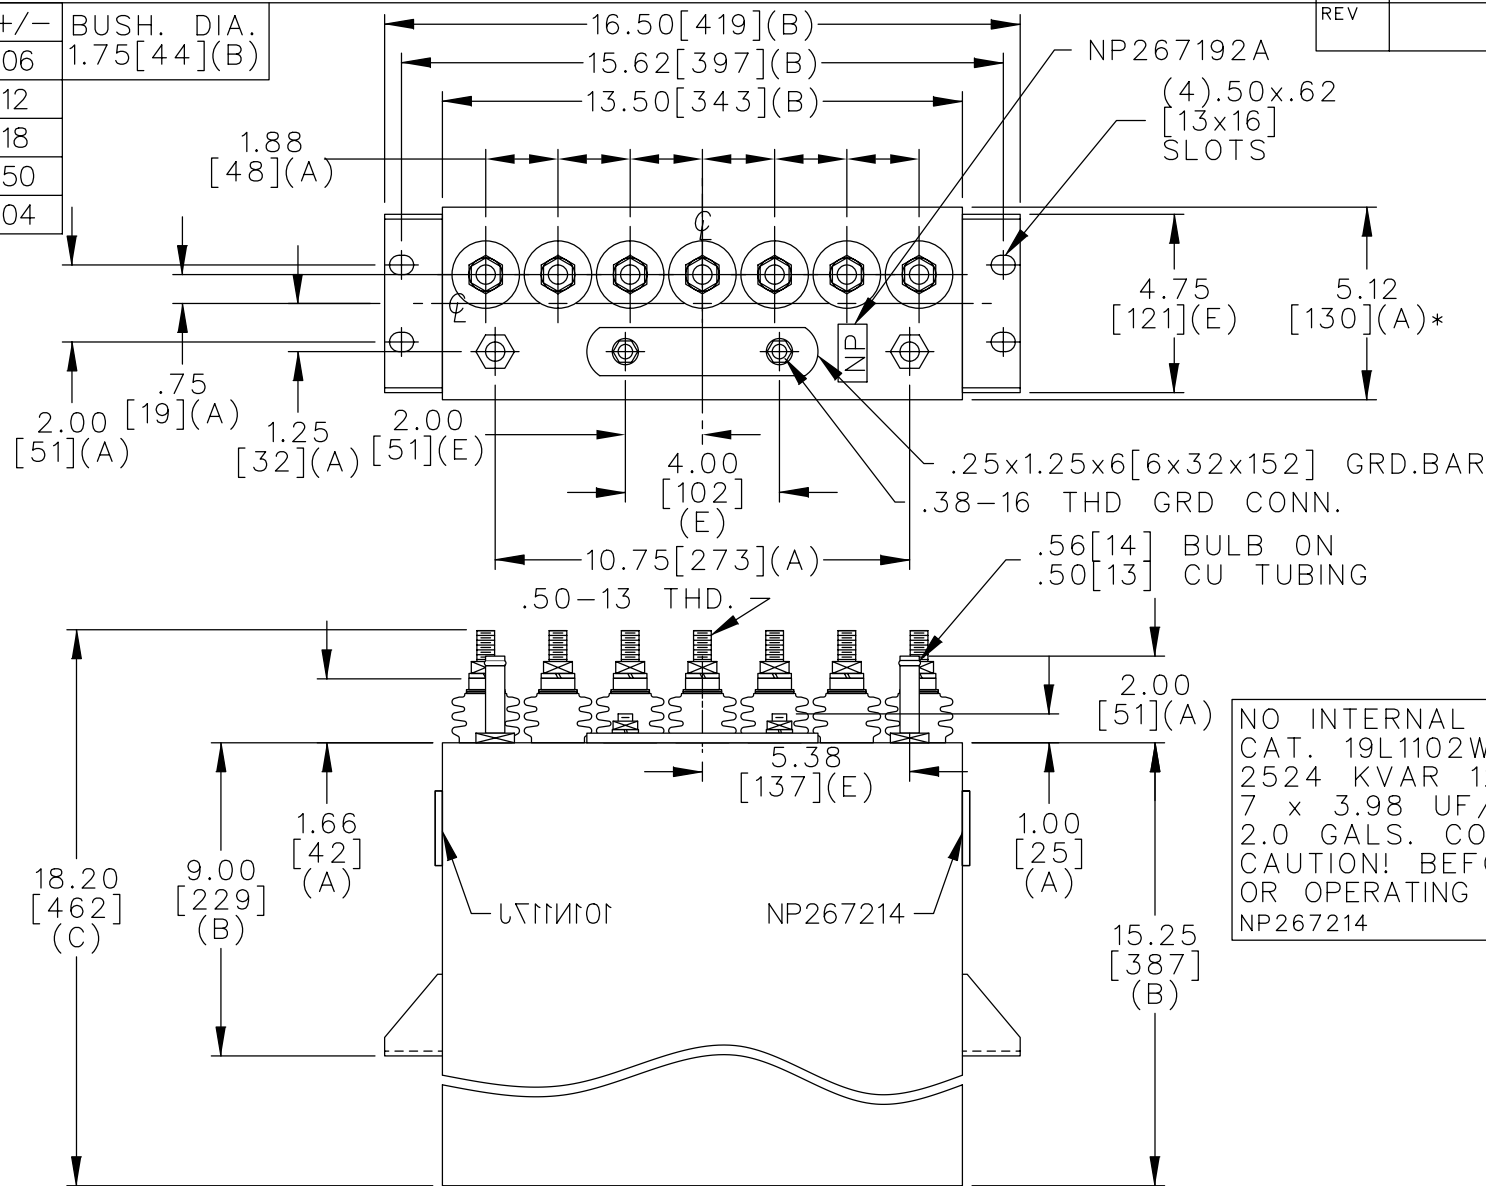

TERM	uF	kVAR
1	3.98	360.7
2	3.98	360.7
3	3.98	360.7
4	3.98	360.7
5	3.98	360.7
6	3.98	360.7
7	3.98	360.7

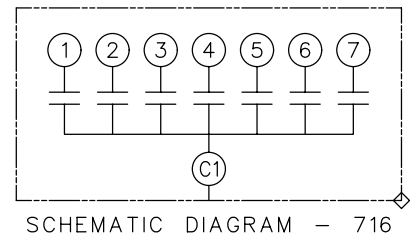

NO INTERNAL DISCH RESISTORS
 CAT. 19L1102WH3 SN
 2524 KVAR 1200V 10000HZ 1PH
 7 x 3.98 UF/TAP
 2.0 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1102WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 5, 1997	SCALE		
ISSUED				DISTR TO	