



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

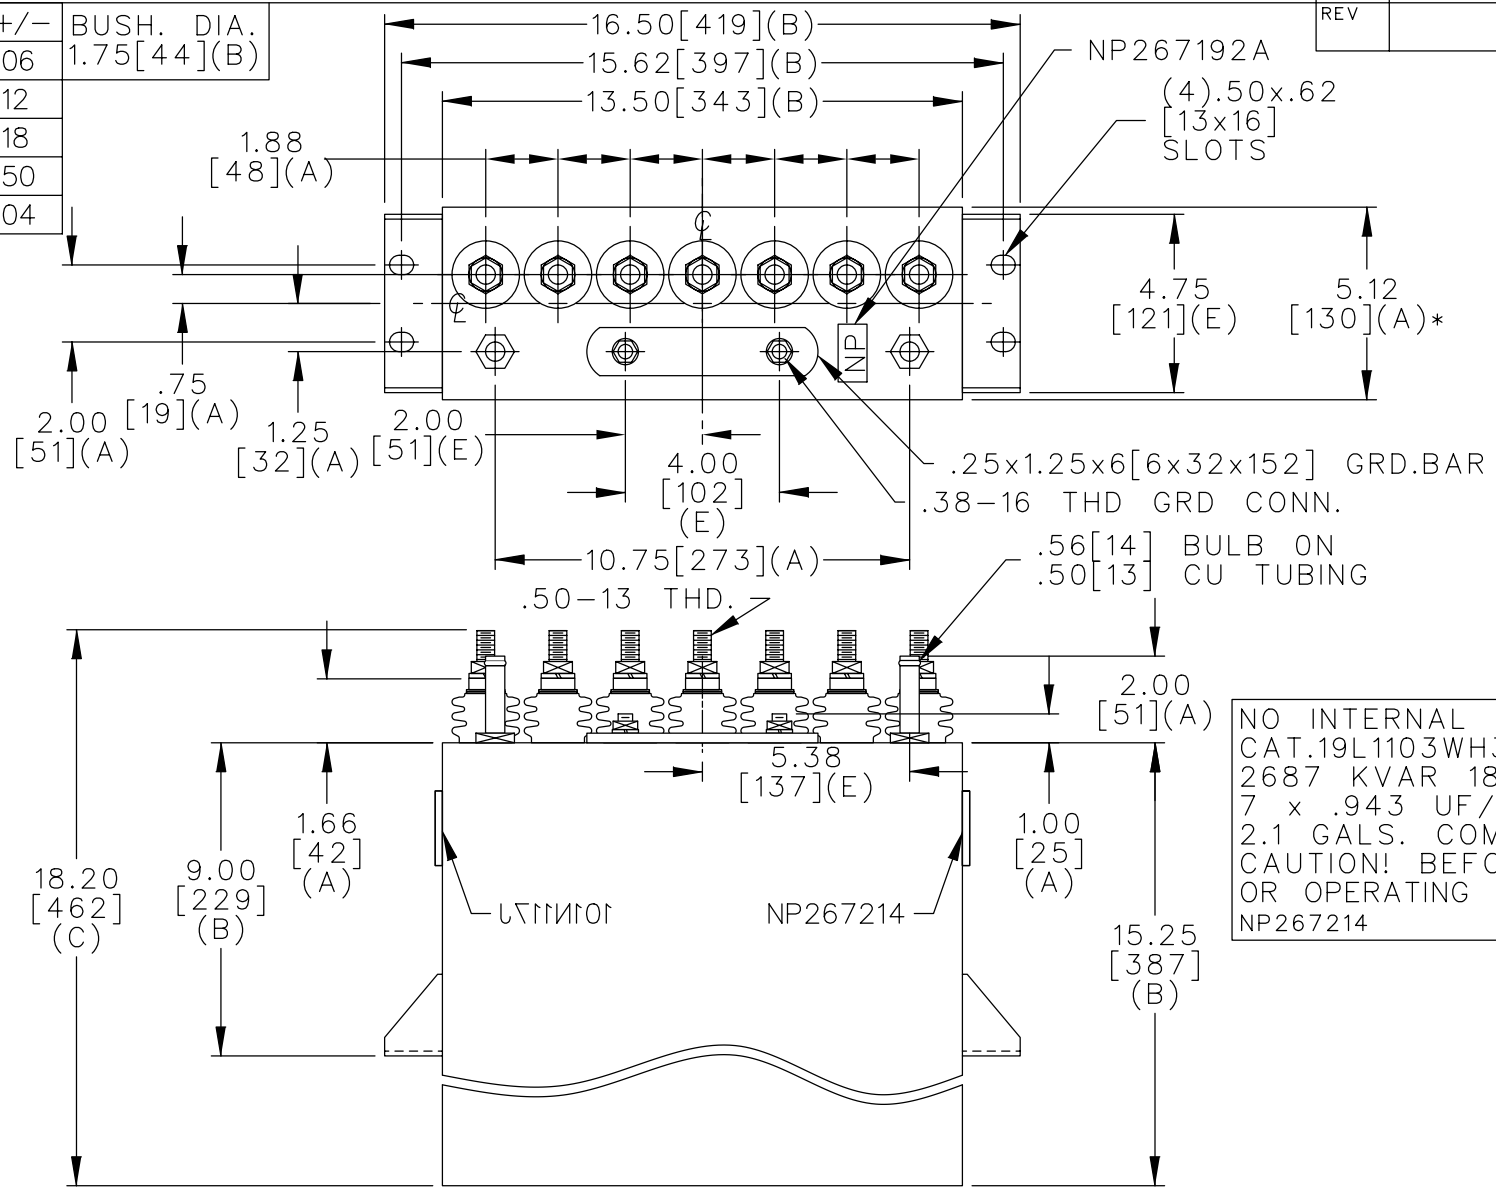

TERM	uF	kVAR
1	.943	383.9
2	.943	383.9
3	.943	383.9
4	.943	383.9
5	.943	383.9
6	.943	383.9
7	.943	383.9

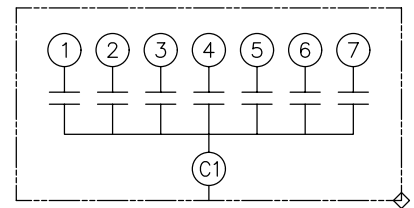

SCHMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT.19L1103WH3 SN
 2687 KVAR 1800V 20000HZ 1PH
 7 x .943 UF/TAP
 2.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L1103WH3</h2>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 5, 1997	SCALE		
ISSUED					

DISTR TO