



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

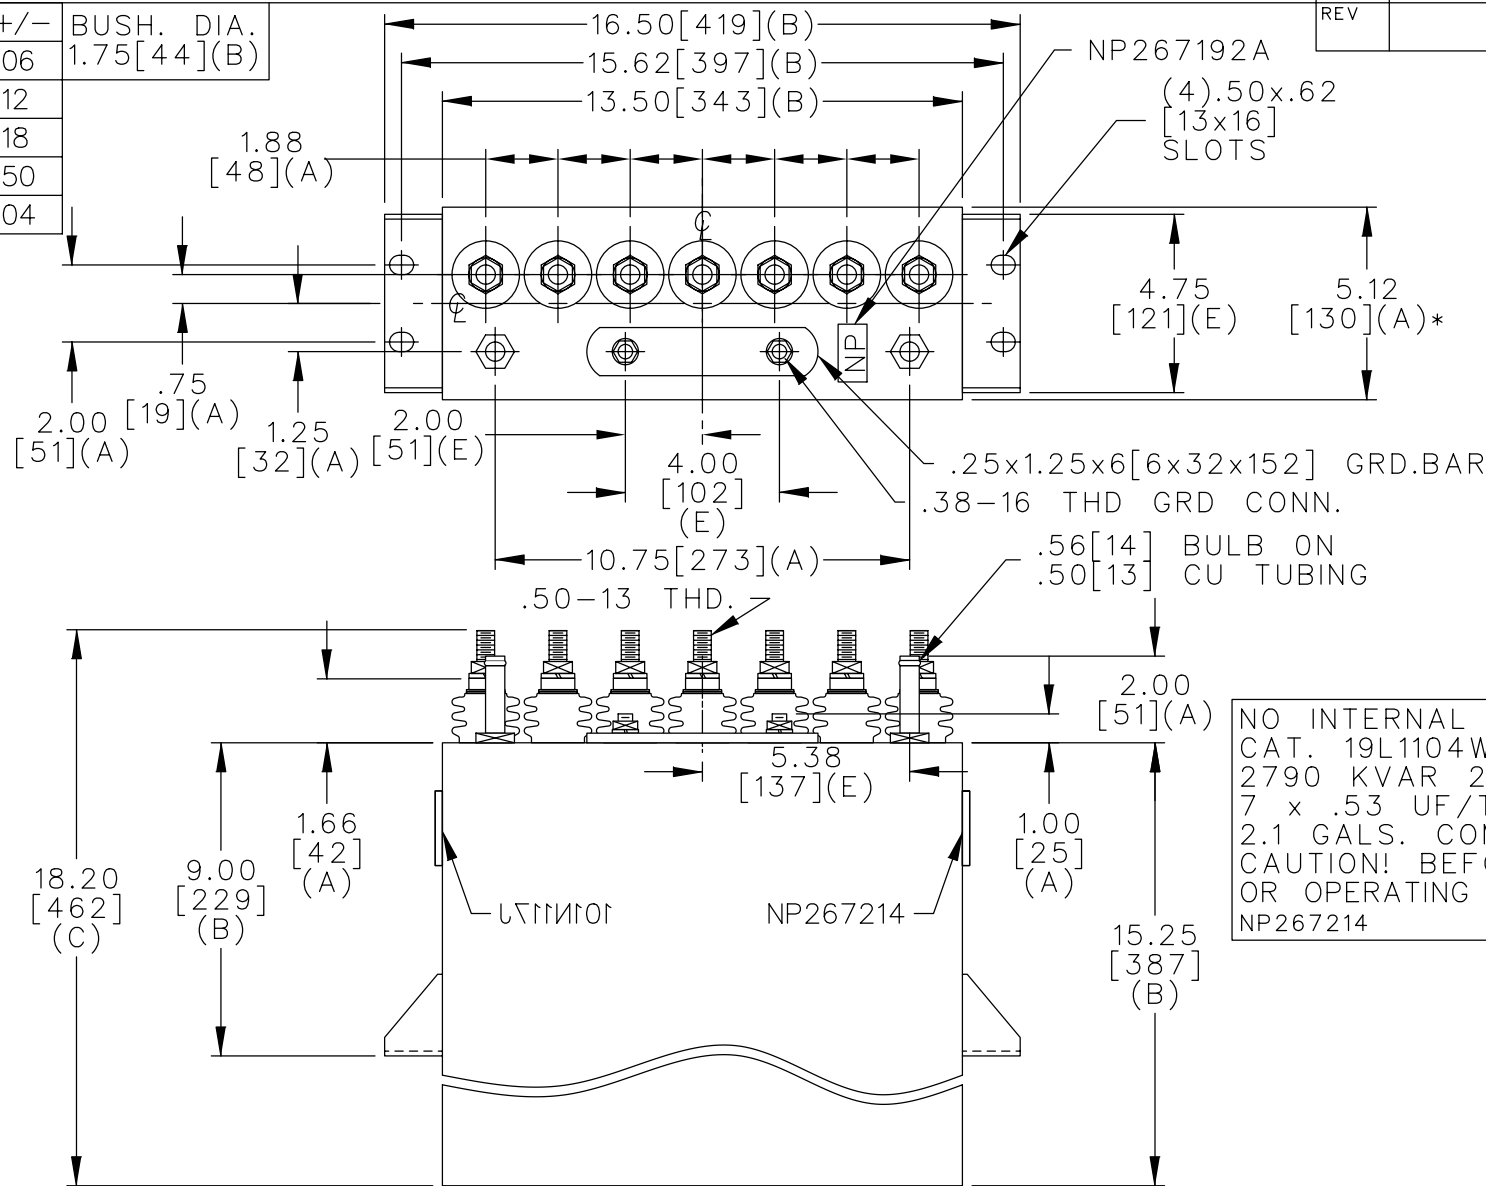

TERM	uF	kVAR
1	.529	398.5
2	.529	398.5
3	.529	398.5
4	.529	398.5
5	.529	398.5
6	.529	398.5
7	.529	398.5

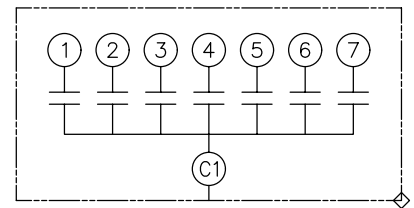

SCHMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT. 19L1104WH3 SN
 2790 KVAR 2000V 3000HZ 1PH
 7 x .53 UF/TAP
 2.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1104WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 5, 1997	SCALE		
ISSUED					DISTR TO