
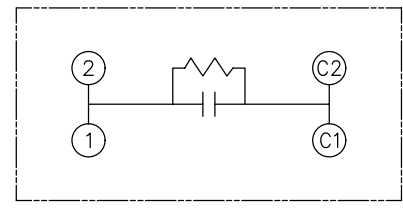


| TOL | +/- |
|-----|-----|
| A   | .06 |
| B   | .12 |
| C   | .18 |
| D   | .50 |
| E   | .04 |

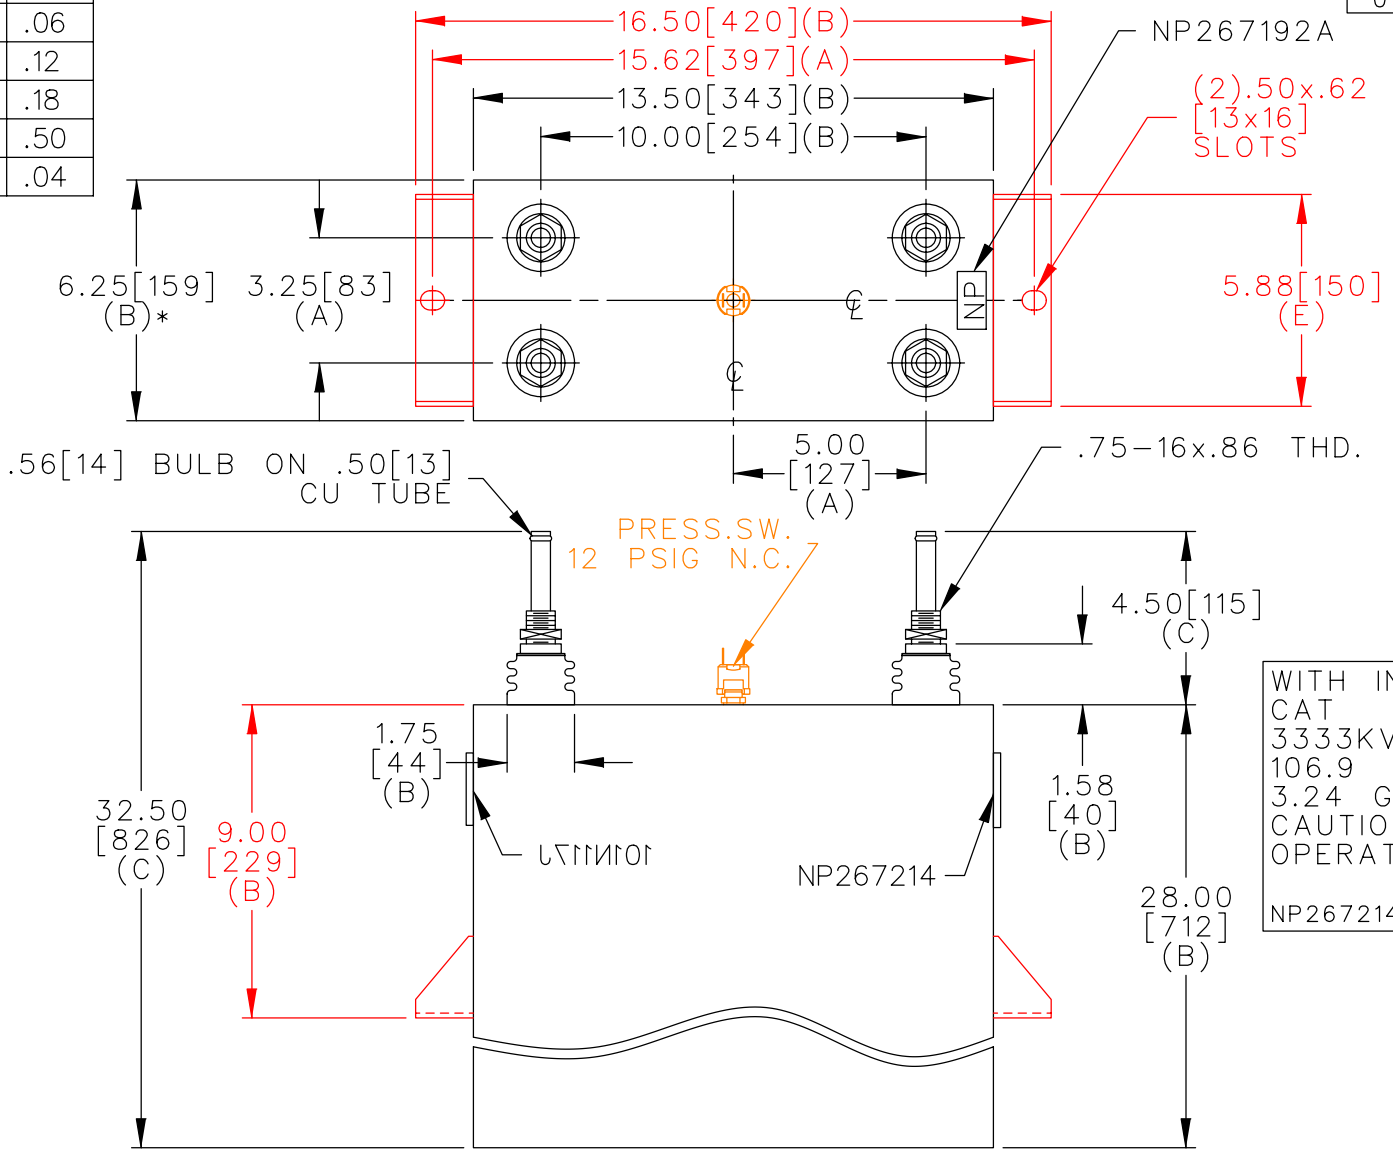

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS  
 CAT 19L110WH4 SN  
 3333KVAR 3150V 500HZ 1PH  
 106.9 UF/TAP  
 3.24 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

|        |                                                           |              |                  |                                  |                             |                 |
|--------|-----------------------------------------------------------|--------------|------------------|----------------------------------|-----------------------------|-----------------|
|        | CAPACITOR & POWER PROTECTION<br>FORT EDWARD, N.Y., U.S.A. |              | SIZE<br><b>A</b> | UNIT WEIGHT<br>106 / 48<br>LB/KG | OUTLINE<br><b>19L110WH4</b> | SHEET 2 CONT. 3 |
|        | DRAWN 05/06/98                                            | LRD 05/06/98 | SCALE<br>WC1     | version                          |                             |                 |
| ISSUED |                                                           |              |                  |                                  | SHEET 2 CONT. 3             | DISTR TO        |