



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

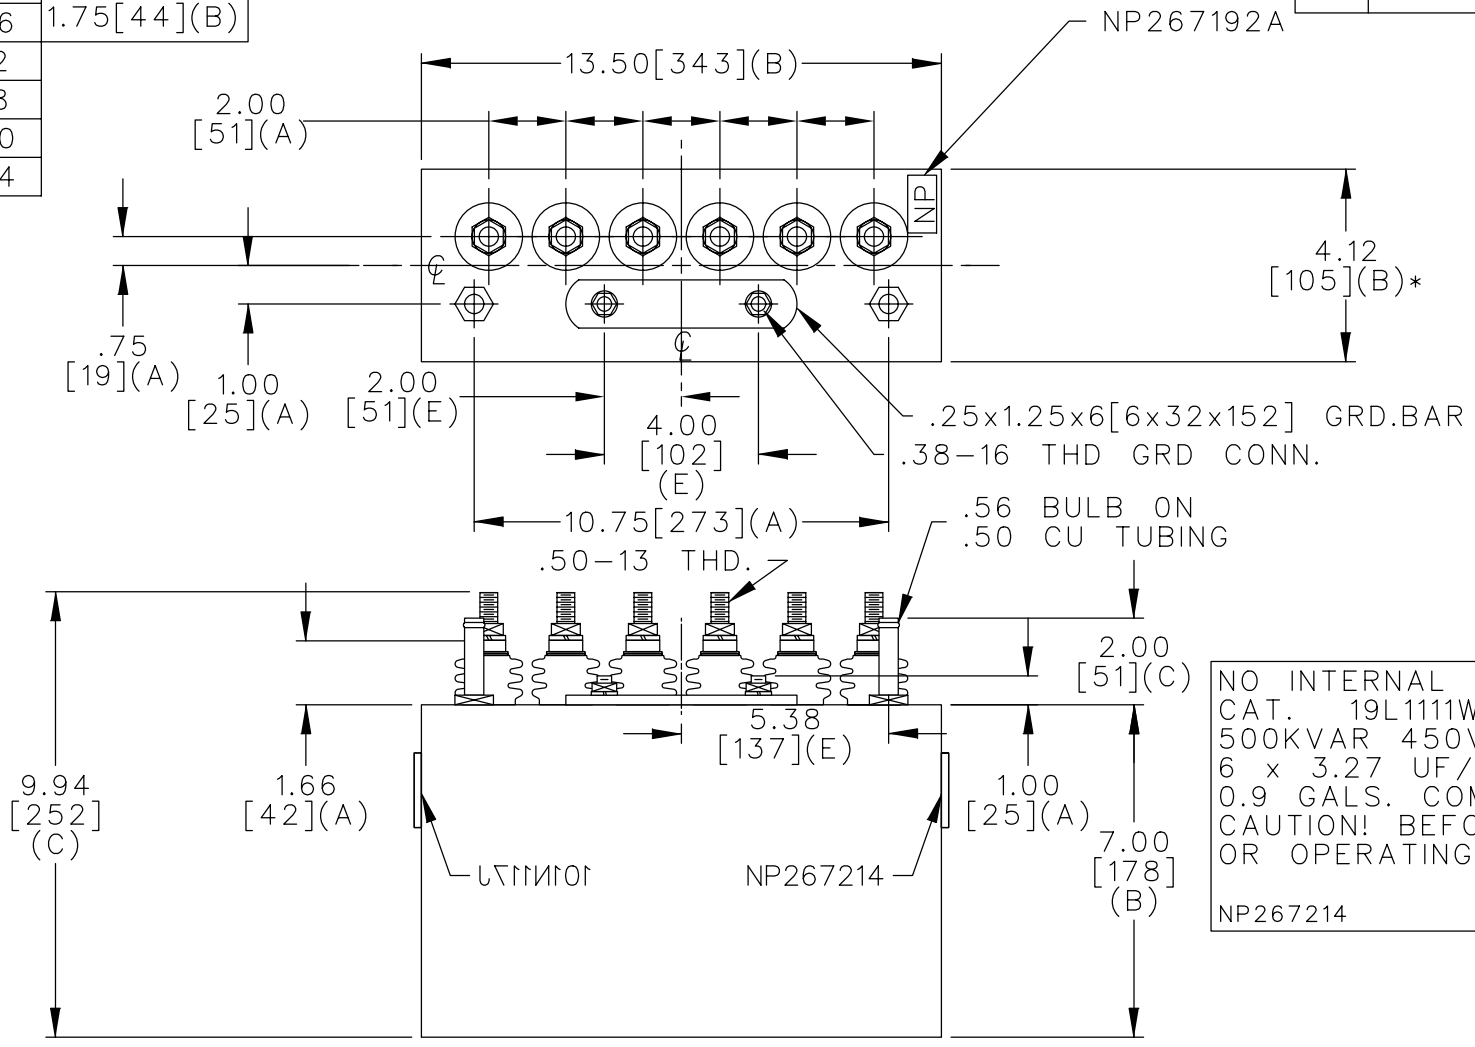

TERM	uF	kVAR
1	3.27	83.33
2	3.27	83.33
3	3.27	83.33
4	3.27	83.33
5	3.27	83.33
6	3.27	83.33

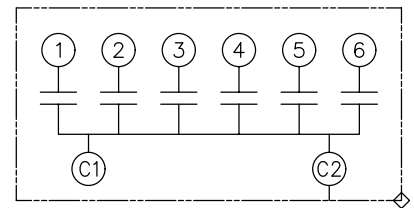

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L1111WH1 SN
 500KVAR 450V 20KHZ 1PH
 6 x 3.27 UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1111WH1		SHEET 2	CONT. ON -
	DRAWN E.McGINN	MAY 20, 1998	SCALE				
ISSUED							