
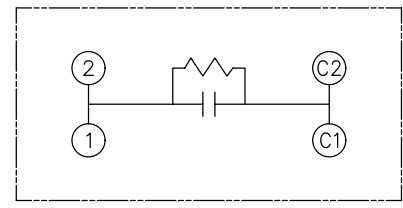


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

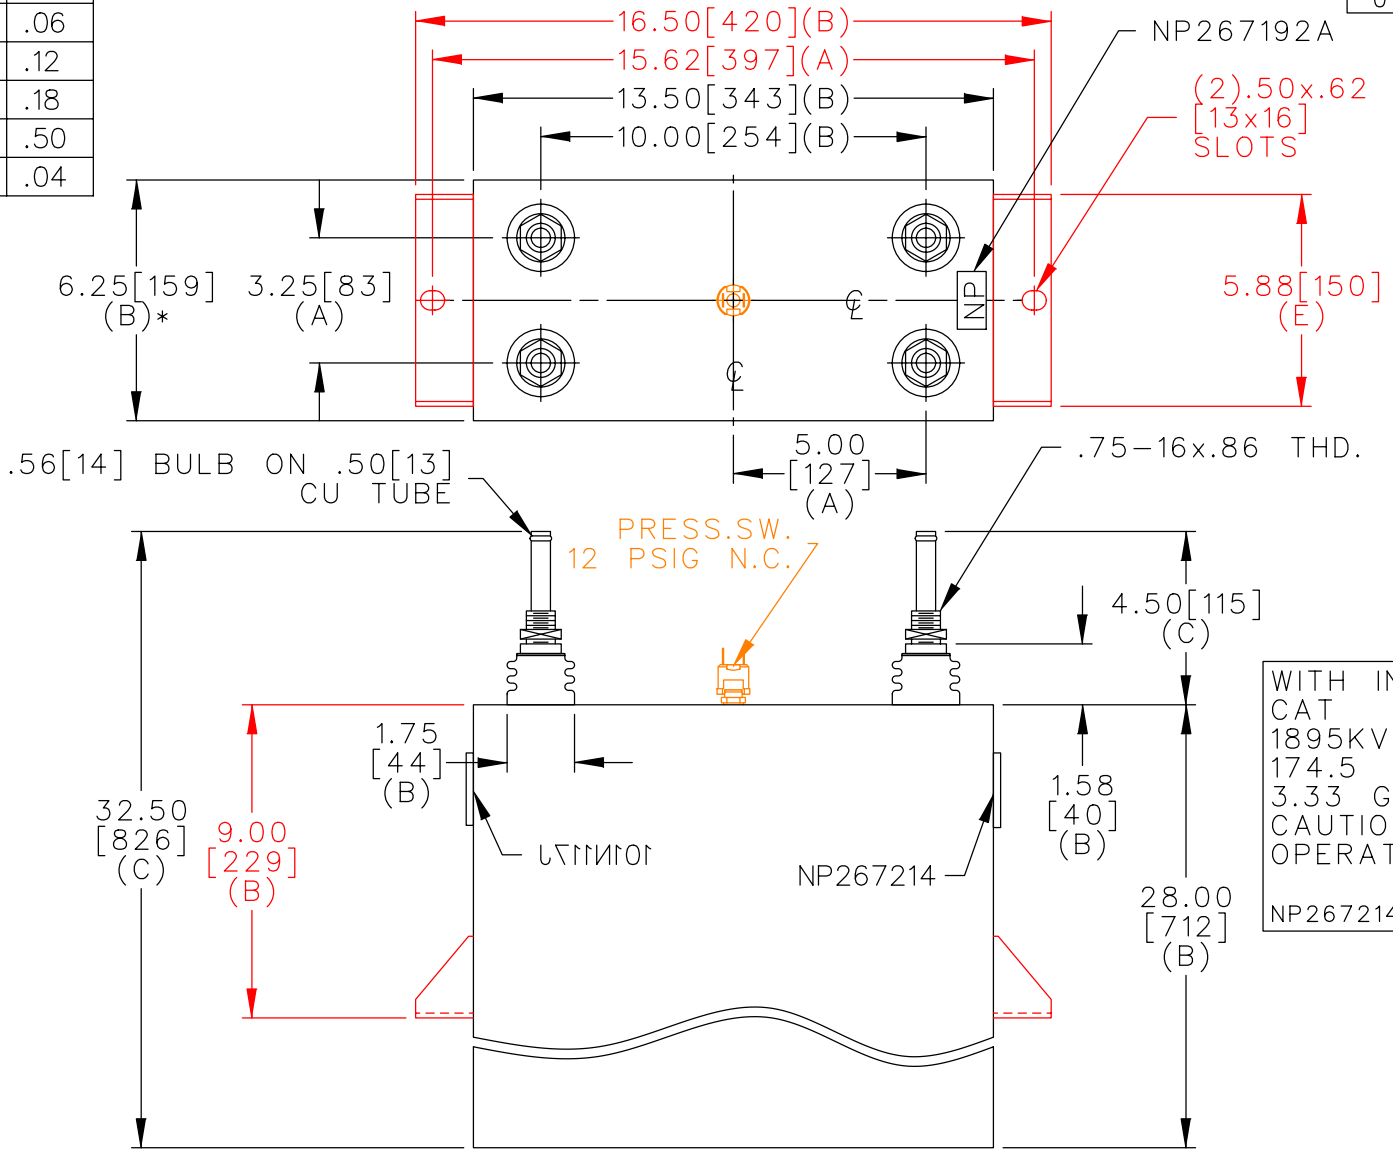

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS  
 CAT 19L1120WH4 SN  
 1895KVAR 2400V 300HZ 1PH  
 174.5 UF/TAP  
 3.33 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 108 / 49 LB/KG	<b>OUTLINE</b> <b>19L1120WH4</b>	SHEET 2 CONT. 3 ON ON
	DRAWN 09/21/98	LRD 09/21/98	SCALE WC1	version		
ISSUED						

DISTR TO