



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

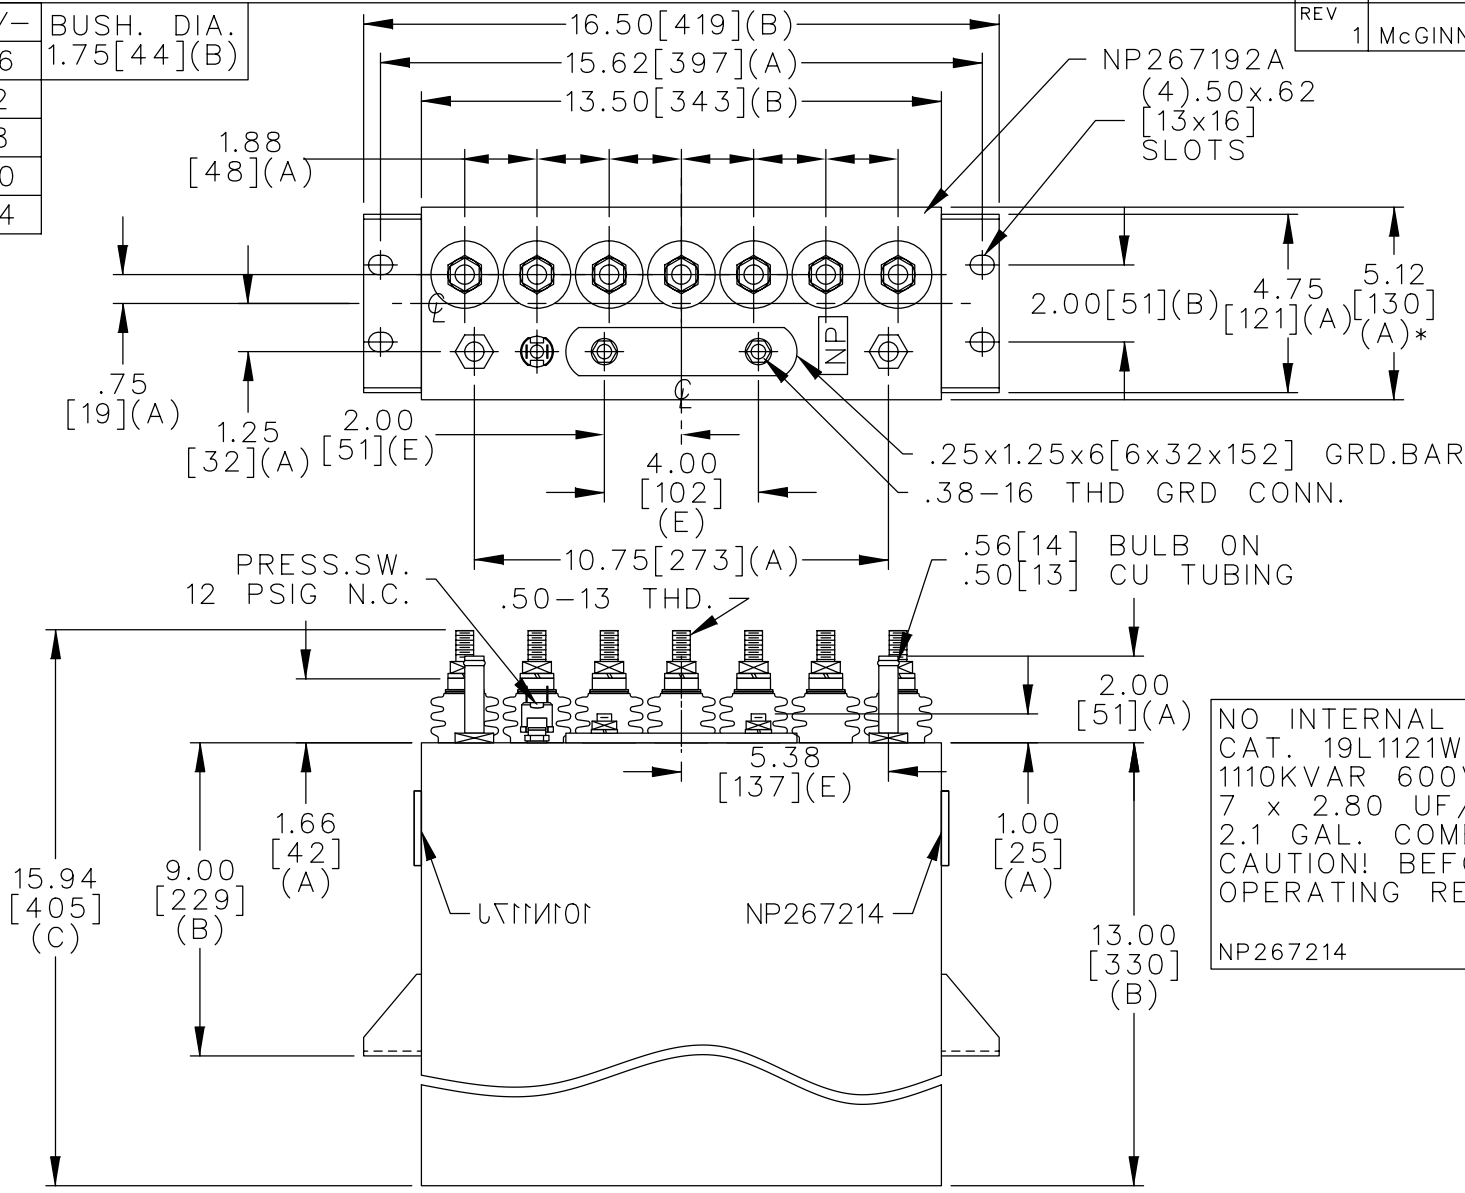

TERM	uF	kVAR
1	2.80	159
2	2.80	159
3	2.80	159
4	2.80	159
5	2.80	159
6	2.80	159
7	2.80	159

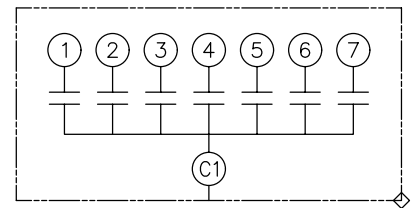

SCHEMATIC DIAGRAM - 716

NO INTERNAL DISCH RESISTORS
 CAT. 19L1121WH4 SN
 1110KVAR 600V 25KHZ 1PH
 7 x 2.80 UF/TAP
 2.1 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1121WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	OCT. 12, 1998	SCALE		
ISSUED	10-14-98	DISTR TO			