




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

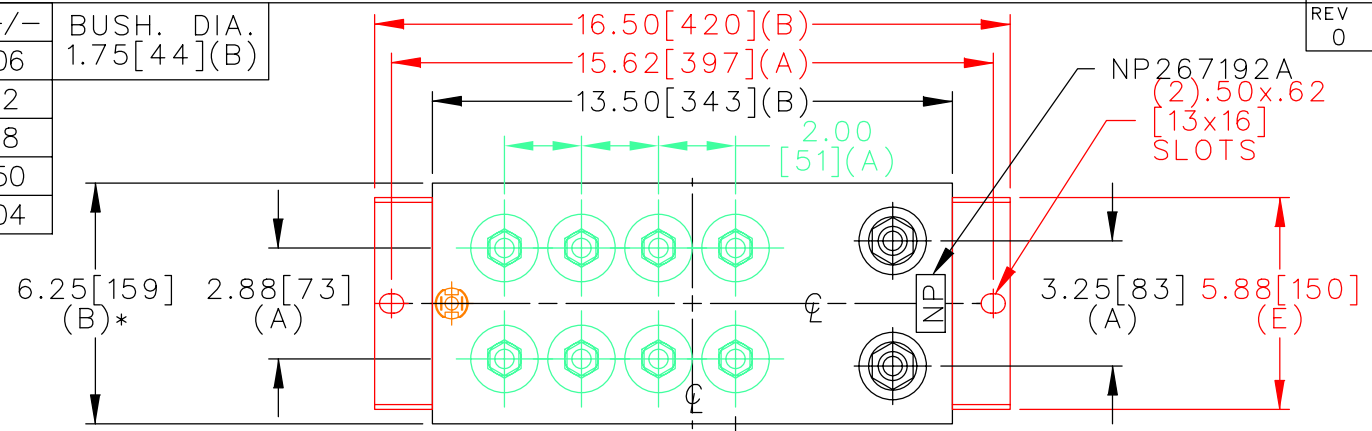

TERM	uF	kVAR
1	125	141.4
2	125	141.4
3	125	141.4
4	125	141.4
5	125	141.4
6	125	141.4
7	125	141.4
8	125	141.4

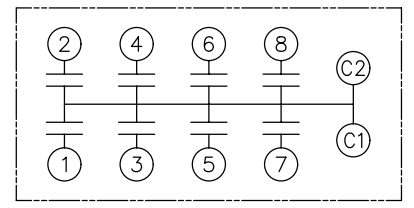

PRESS.SW. 12 PSIG N.C.

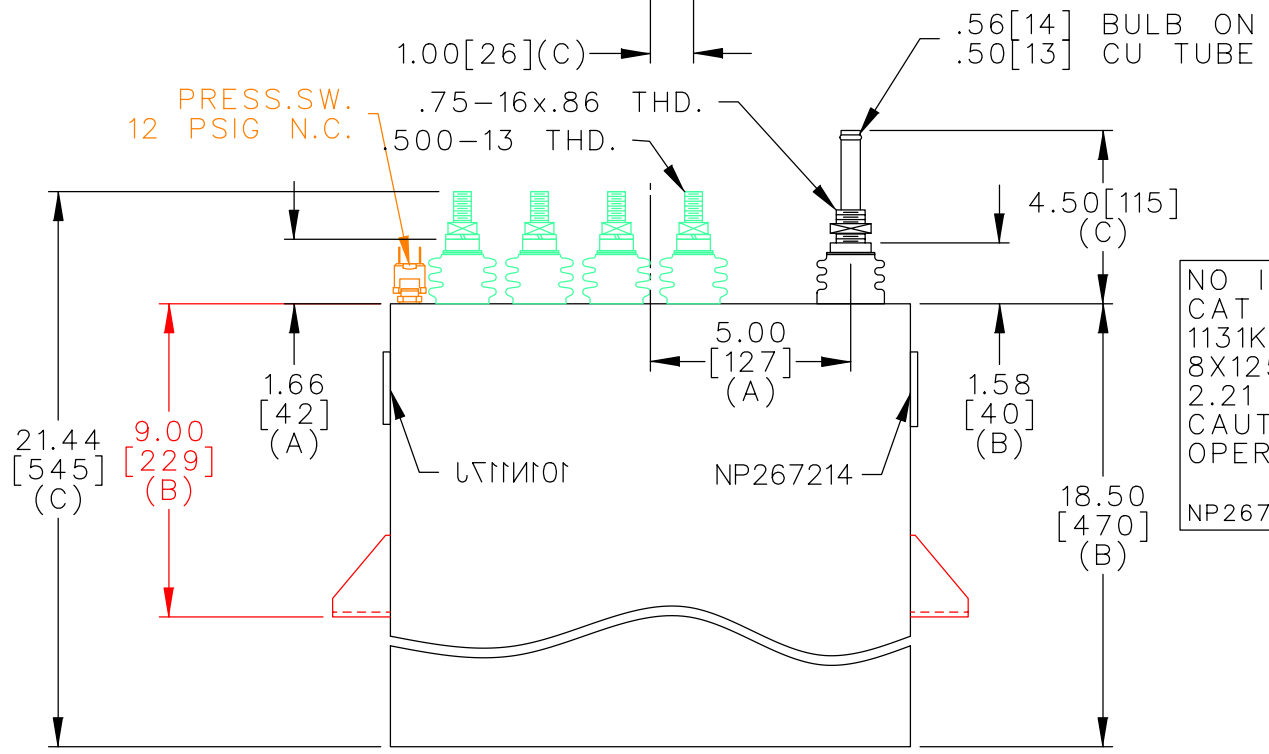

NO INTERNAL DISCH RESISTORS
 CAT 19L1123WH4 SN
 1131KVAR 600V 500HZ 1PH
 8X125.0 UF/TAP
 2.21 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	<p>SIZE A</p>	<p>UNIT WEIGHT 86 / 39 LB/KG</p>	<p>OUTLINE 19L1123WH4</p>
	<p>SCALE WC7</p>	<p>version</p>	
<p>DRAWN 10/22/98</p>	<p>LRD 10/22/98</p>	<p>DISTR TO</p>	
<p>ISSUED</p>	<p>DATE 10/22/98</p>		