





TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

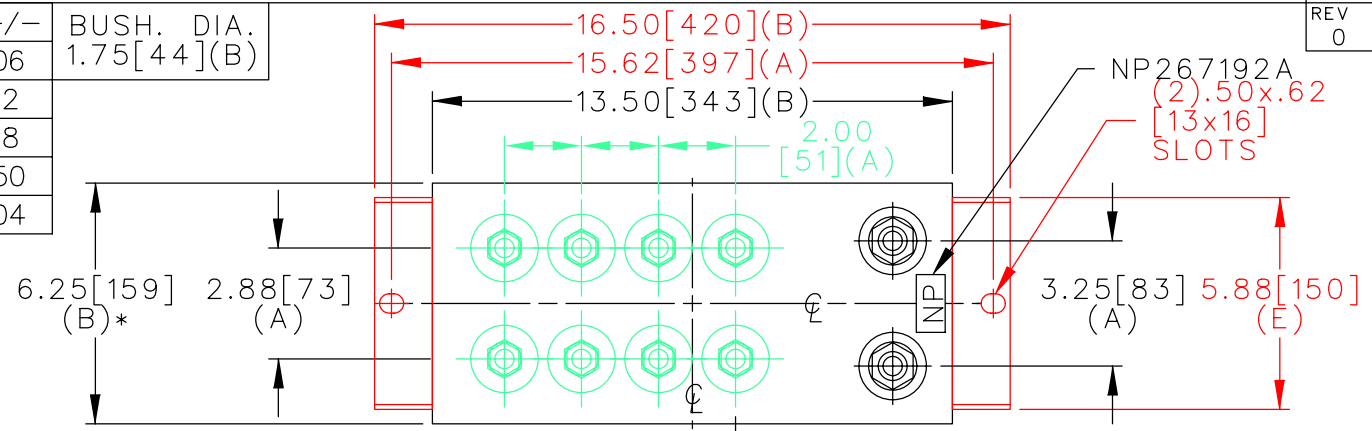

TERM	uF	kVAR
1	44.21	225
2	44.21	225
3	44.21	225
4	44.21	225
5	44.21	225
6	44.21	225
7	44.21	225
8	44.21	225

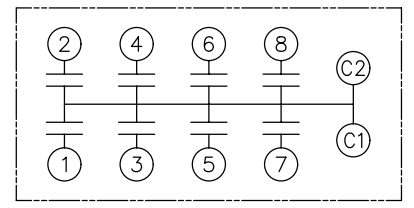

SCHEMATIC DIAGRAM - 800

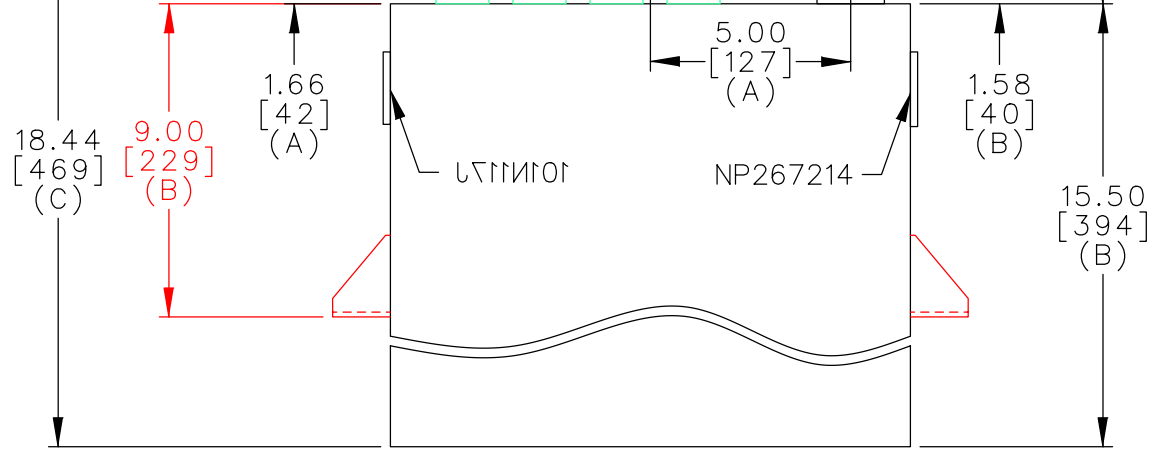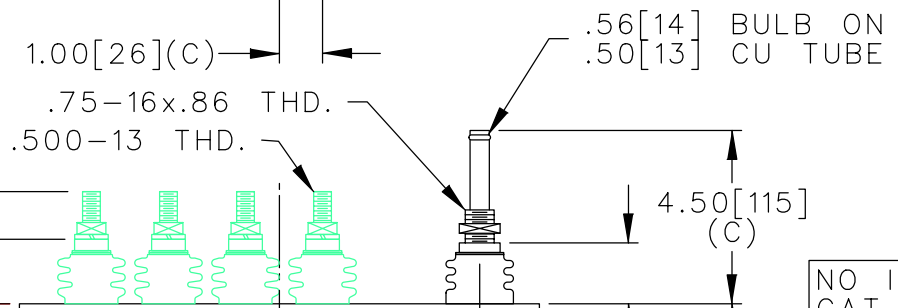

NO INTERNAL DISCH RESISTORS
 CAT 19L1129WH3 SN
 1800KVAR 900V 1000HZ 1PH
 8X44.21 UF/TAP
 1.74 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 84 / 38 LB/KG	OUTLINE 19L1129WH3	SHEET 2 CONT. 3 ON ON
	DRAWN 12/09/98	LRD 12/09/98	SCALE WC7	version		
ISSUED						

DISTR TO