





TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

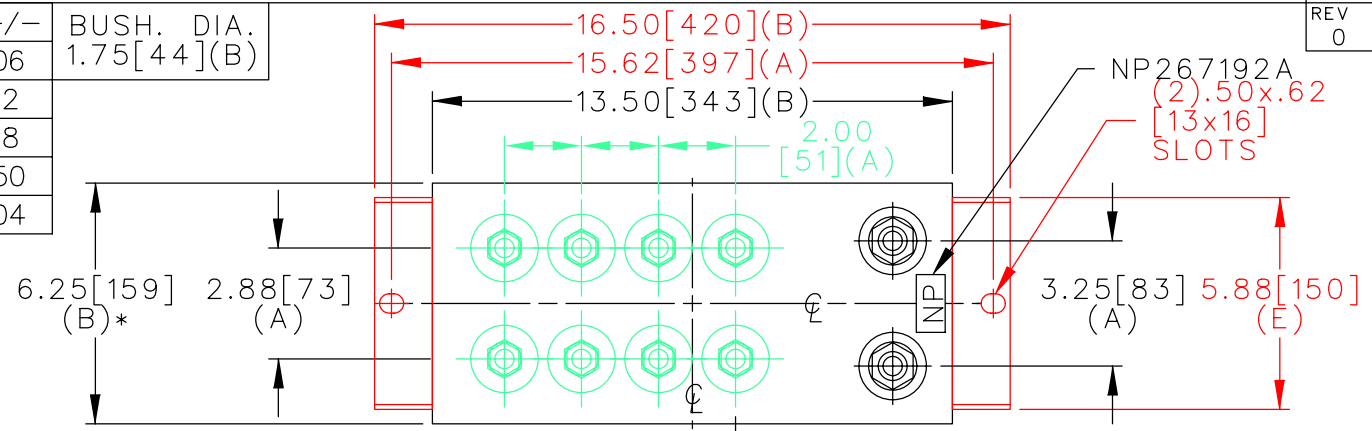

TERM	uF	kVAR
1	64.54	187.5
2	64.54	187.5
3	64.54	187.5
4	64.54	187.5
5	64.54	187.5
6	64.54	187.5
7	64.54	187.5
8	64.54	187.5

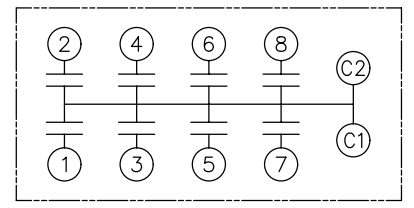

SCHEMATIC DIAGRAM - 800

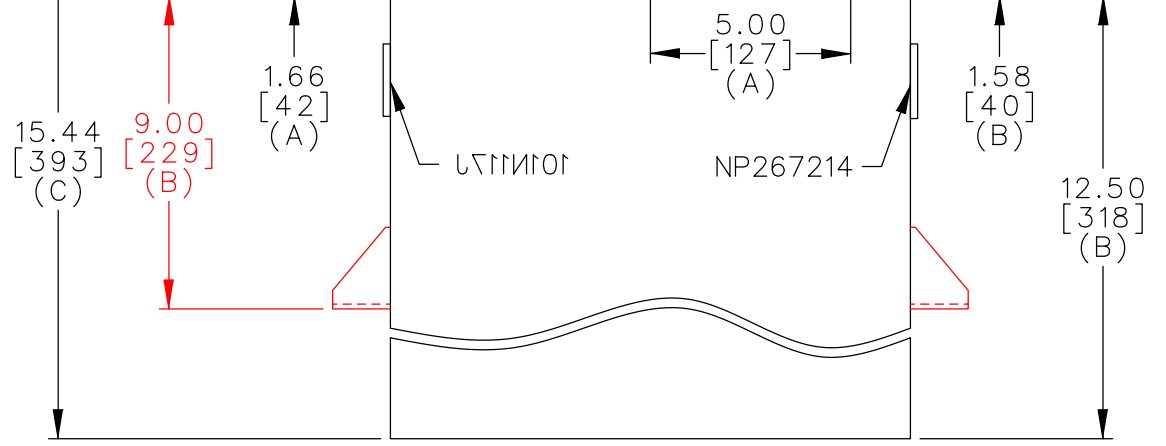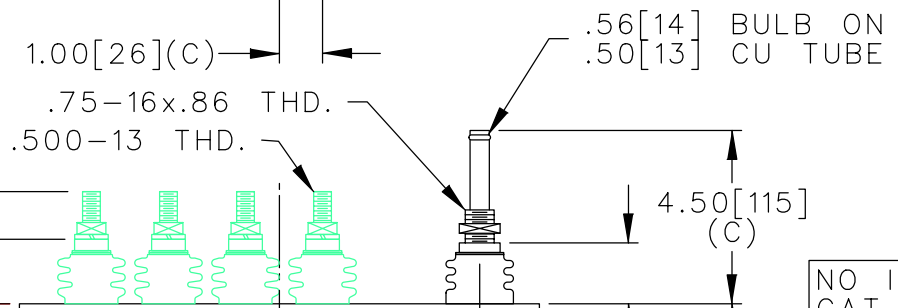

NO INTERNAL DISCH RESISTORS  
 CAT 19L1141WH3 SN  
 1500KVAR 680V 1000HZ 1PH  
 8X64.54 UF/TAP  
 1.51 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 67 / 30 LB/KG	OUTLINE 19L1141WH3	SHEET 2 CONT. 3 ON ON
	DRAWN 04/28/99	LRD 04/28/99	SCALE WC7	version		

DISTR TO