

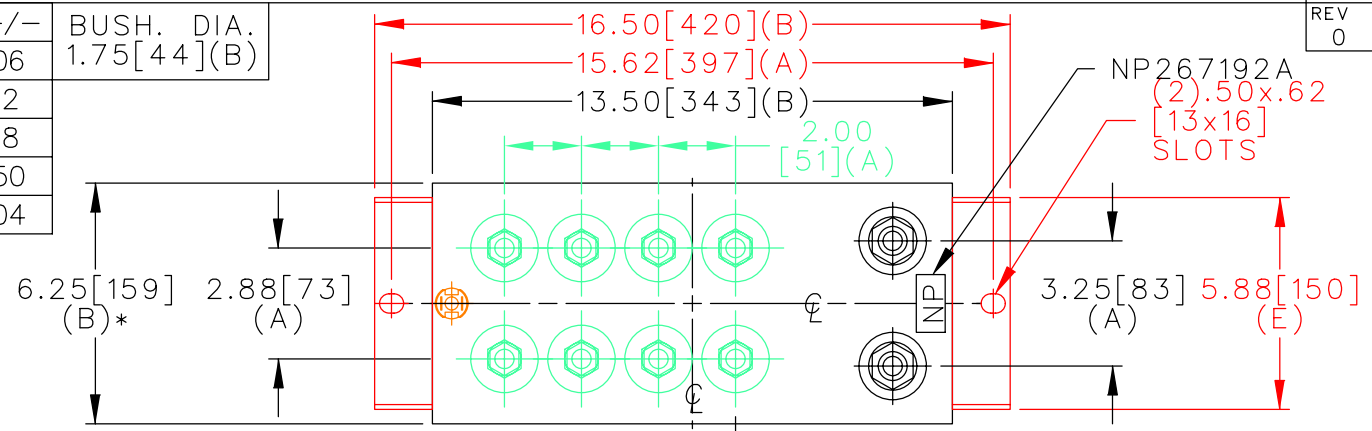


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

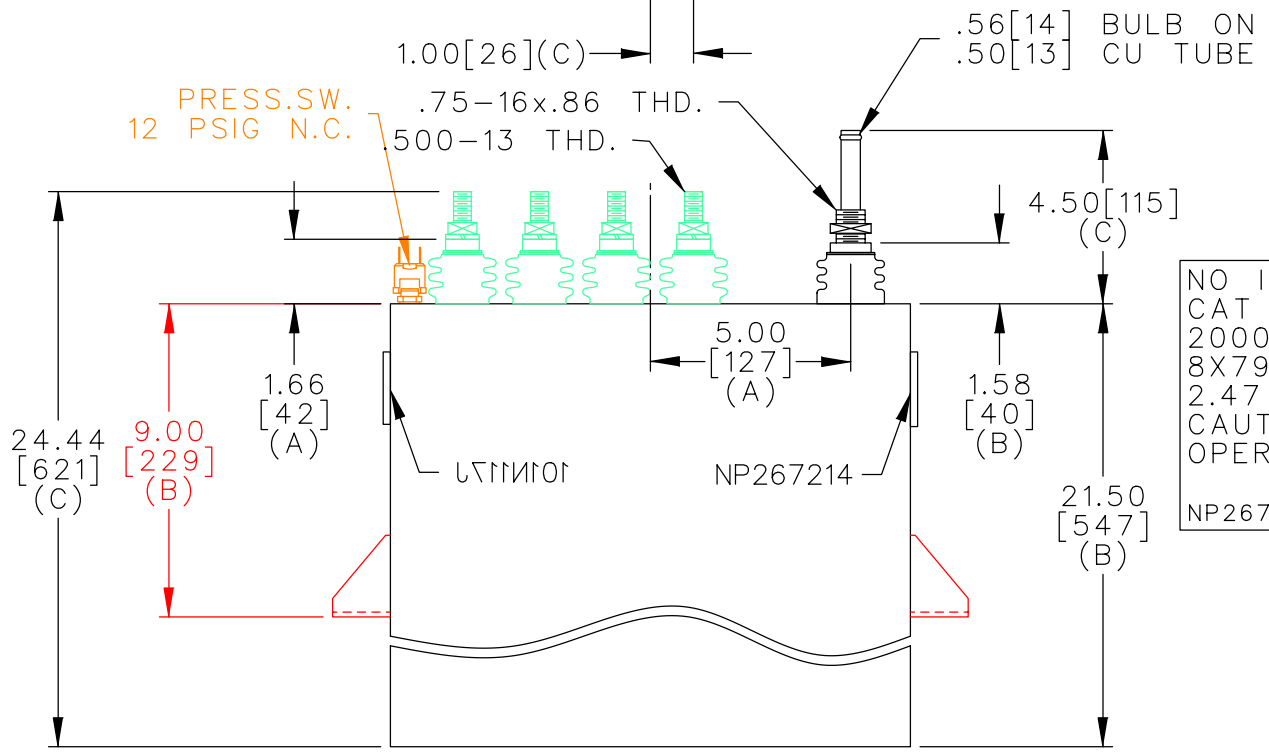

TERM	uF	kVAR
1	79.58	250
2	79.58	250
3	79.58	250
4	79.58	250
5	79.58	250
6	79.58	250
7	79.58	250
8	79.58	250

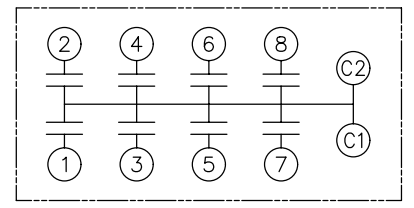

NO INTERNAL DISCH RESISTORS
 CAT 19L1144WH4 SN
 2000KVAR 1000V 500HZ 1PH
 8X79.58 UF/TAP
 2.47 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 98 / 45 LB/KG	OUTLINE 19L1144WH4	SHEET 2 CONT. 3 ON ON
	DRAWN 09/08/99	LRD 09/08/99	SCALE WC7	version		
ISSUED						

DISTR TO