




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

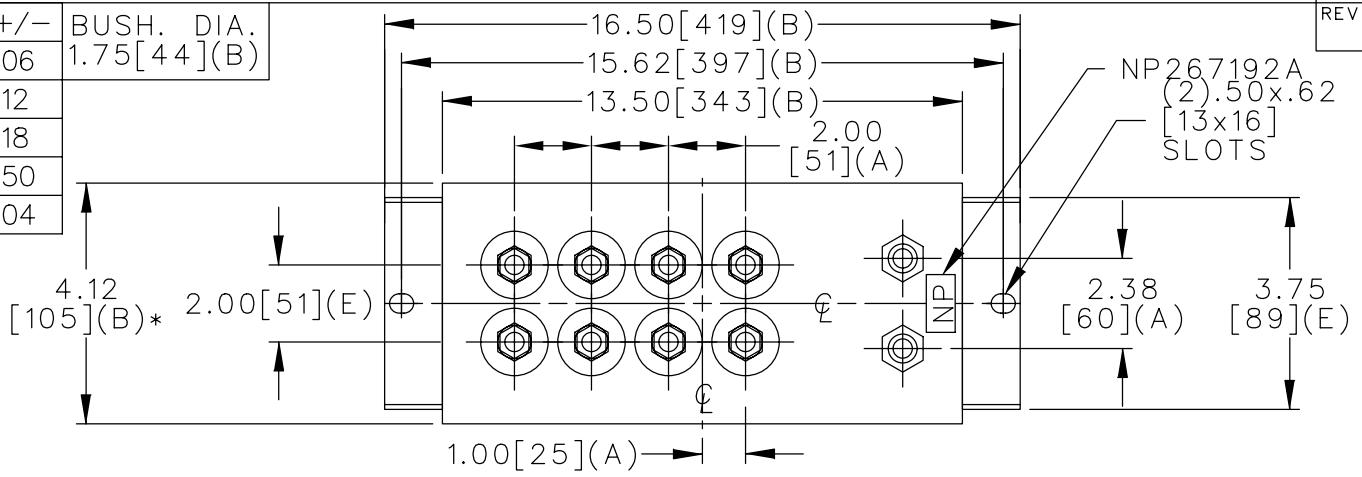

TERM	uF	kVAR
1	2.85	87.7
2	2.85	87.7
3	1.70	52.3
4	1.70	52.3
5	1.70	52.3
6	1.70	52.3
7	0.85	26.2
8	0.85	26.2

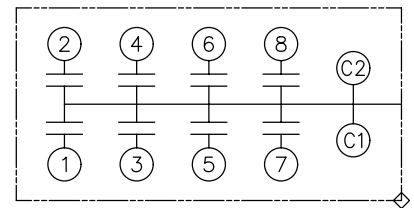

SCHEMATIC DIAGRAM - 801

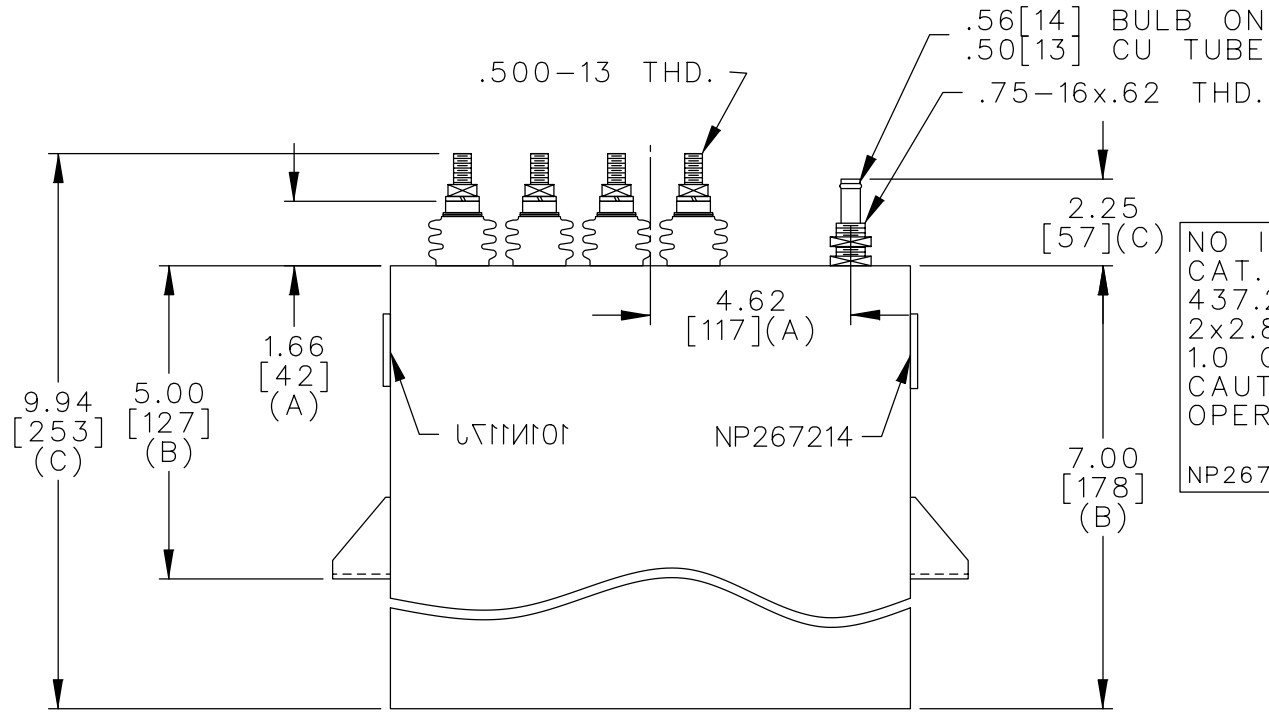

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1145WH3 SN  
 437.2KVAR 700V 10000HZ 1PH  
 2x2.85+4x1.70+2x.85 UF/TAP  
 1.0 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L1145WH3</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	FEB. 15, 2000	SCALE		
ISSUED					