



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

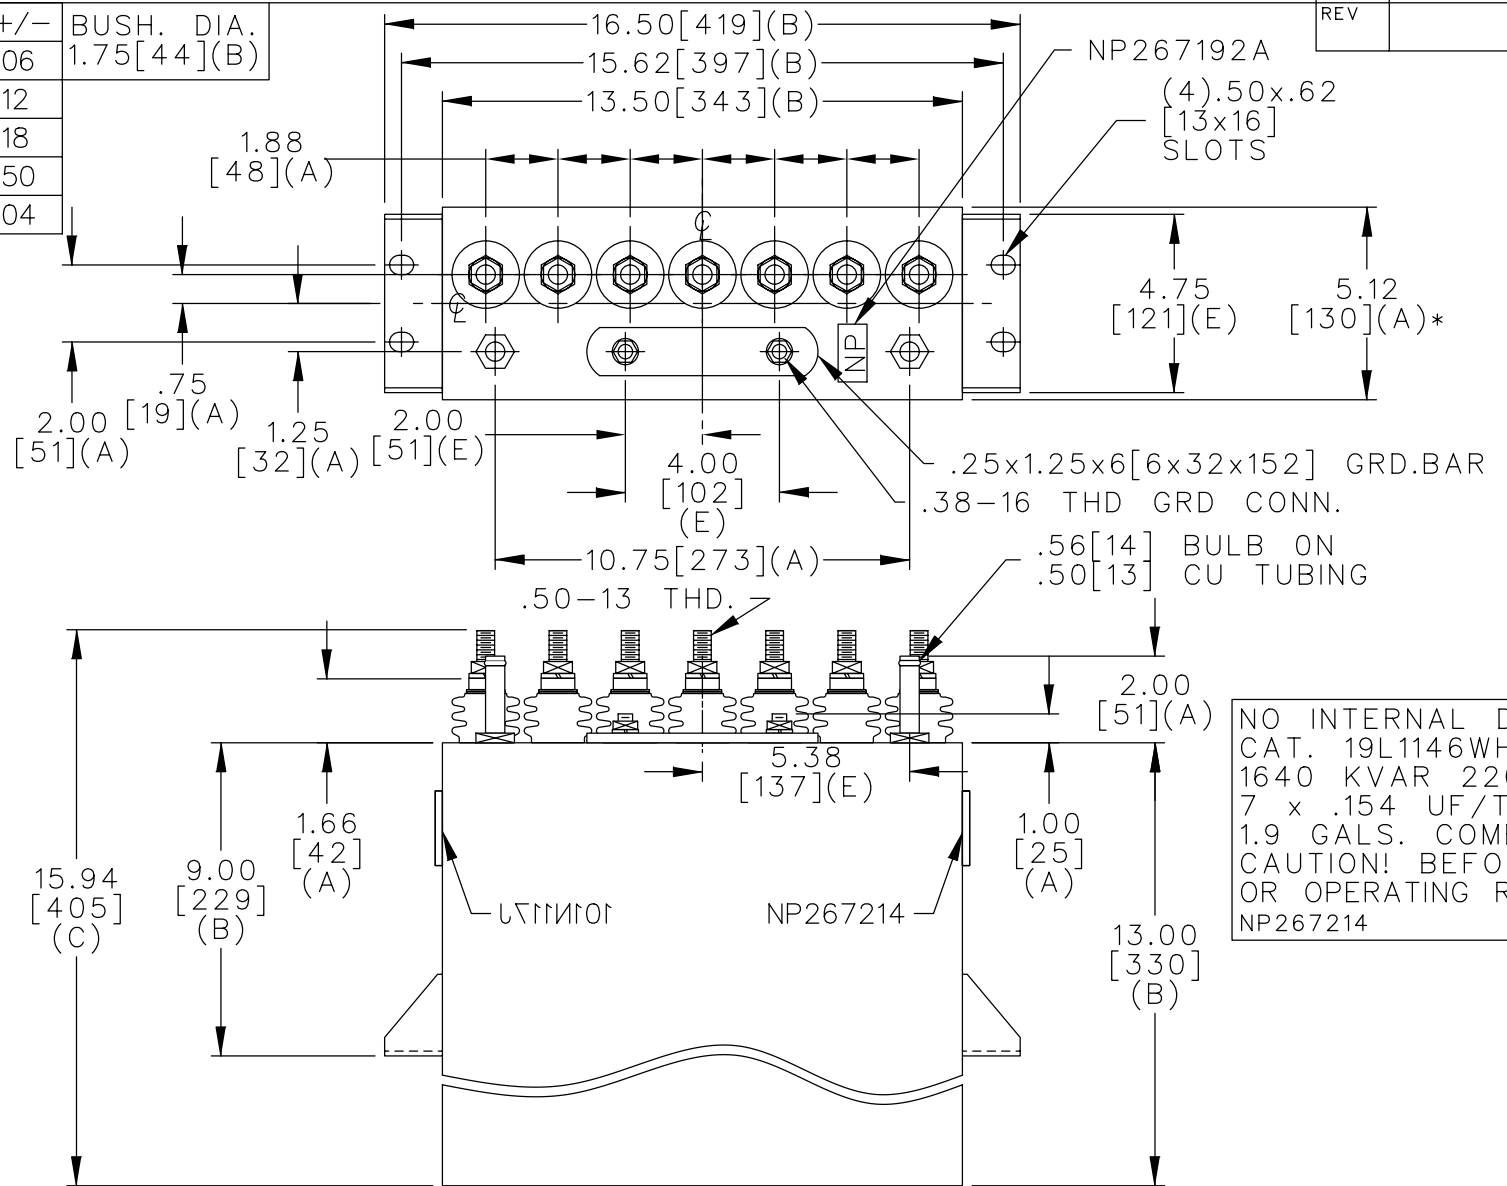

TERM	uF	kVAR
1	.154	234.3
2	.154	234.3
3	.154	234.3
4	.154	234.3
5	.154	234.3
6	.154	234.3
7	.154	234.3

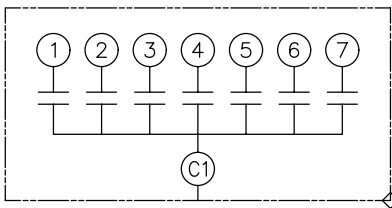

NO INTERNAL DISCH RESISTORS
 CAT. 19L1146WH3 SN
 1640 KVAR 2200V 50000HZ 1PH
 7 x .154 UF/TAP
 1.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1146WH3	SHEET 2 CONT. ON -
	DRAWN P.COLE	FEB. 23, 2000	SCALE		
ISSUED					