



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

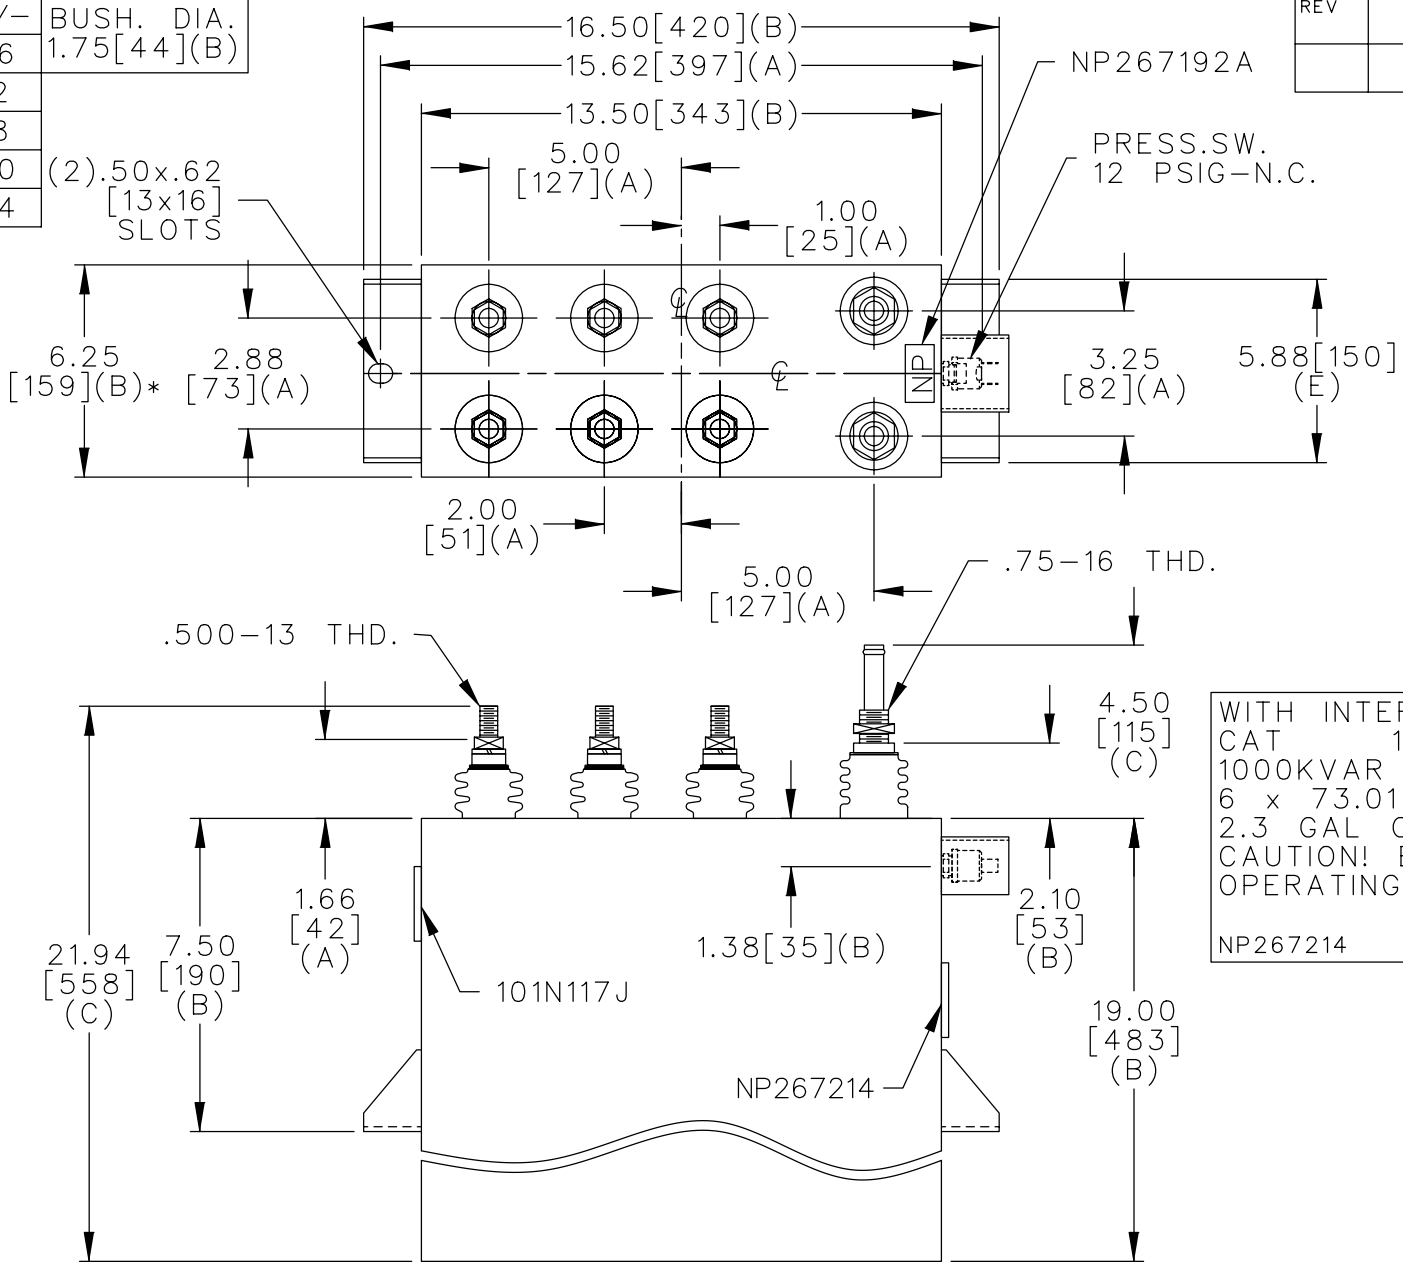

TERM	uF	kVAR
1	73.07	166.7
2	73.07	166.7
3	73.07	166.7
4	73.07	166.7
5	73.07	166.7
6	73.07	166.7

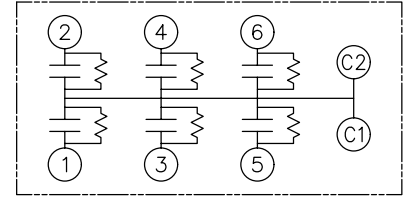

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS  
 CAT 19L1150WH4 SN  
 1000KVAR 1100V 300HZ 1PH  
 6 x 73.01 UF/TAP  
 2.3 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L1150WH4</h2>		DISTR TO
	DRAWN E.McGINN	JULY 19, 2000	SCALE			
ISSUED			SHEET 2	CONT. 3	ON	3