
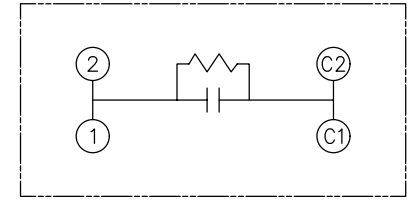
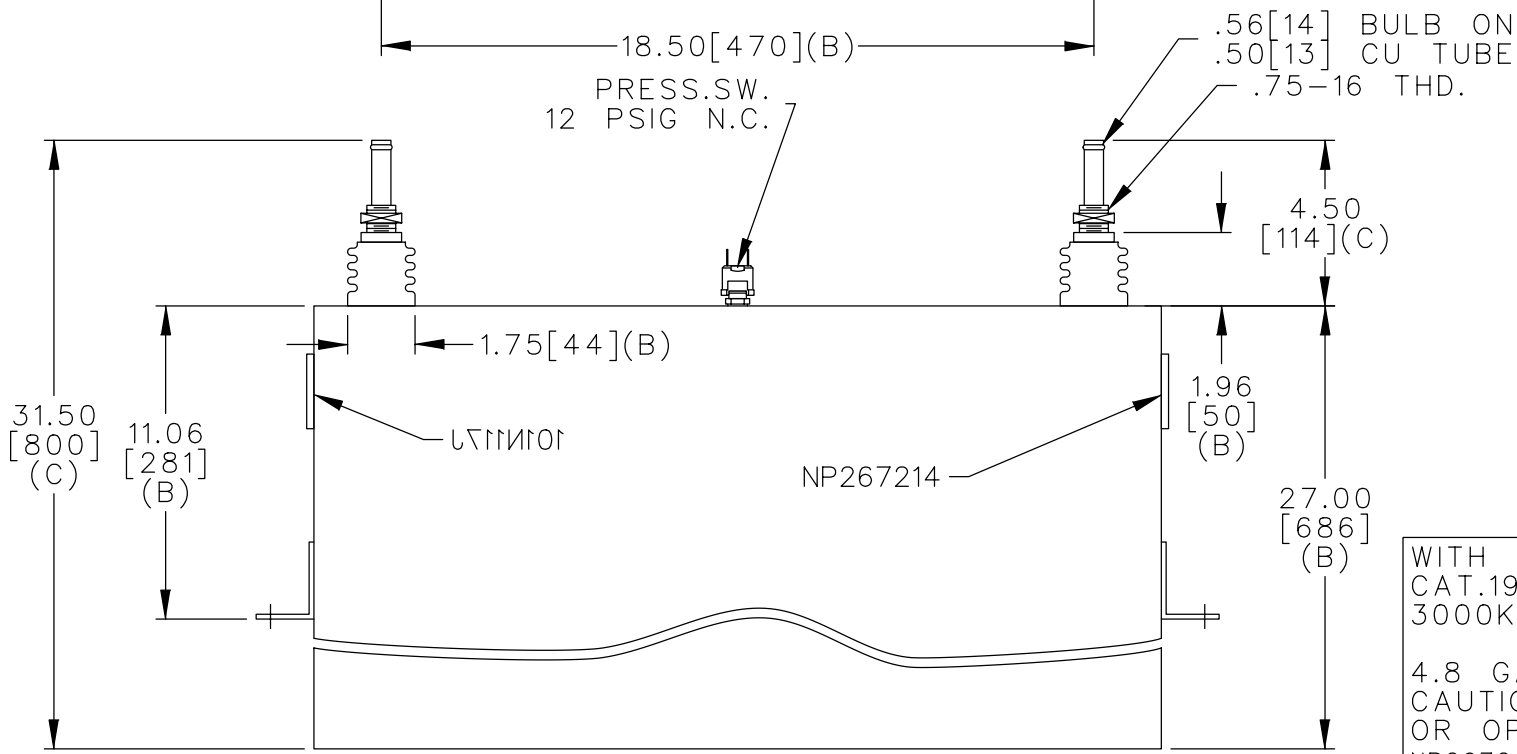


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

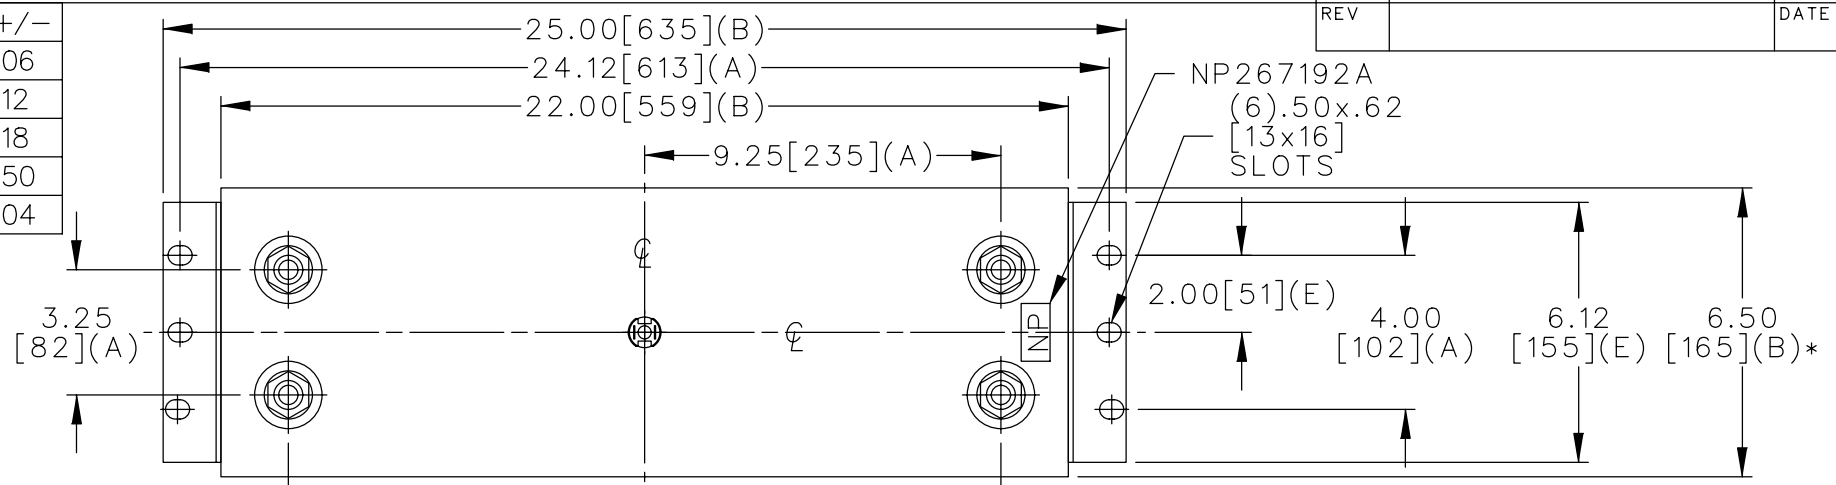

WITH INTERNAL DISCH RESISTORS
 CAT.19L1151WH4 SN
 3000KVAR 3000V 300HZ 1PH
 4.8 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.75 [19]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1151WH4	
	DRAWN B.ROSS	8/10/00	SCALE		
ISSUED			SHEET 2	CONT. ON 3	DISTR TO