



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

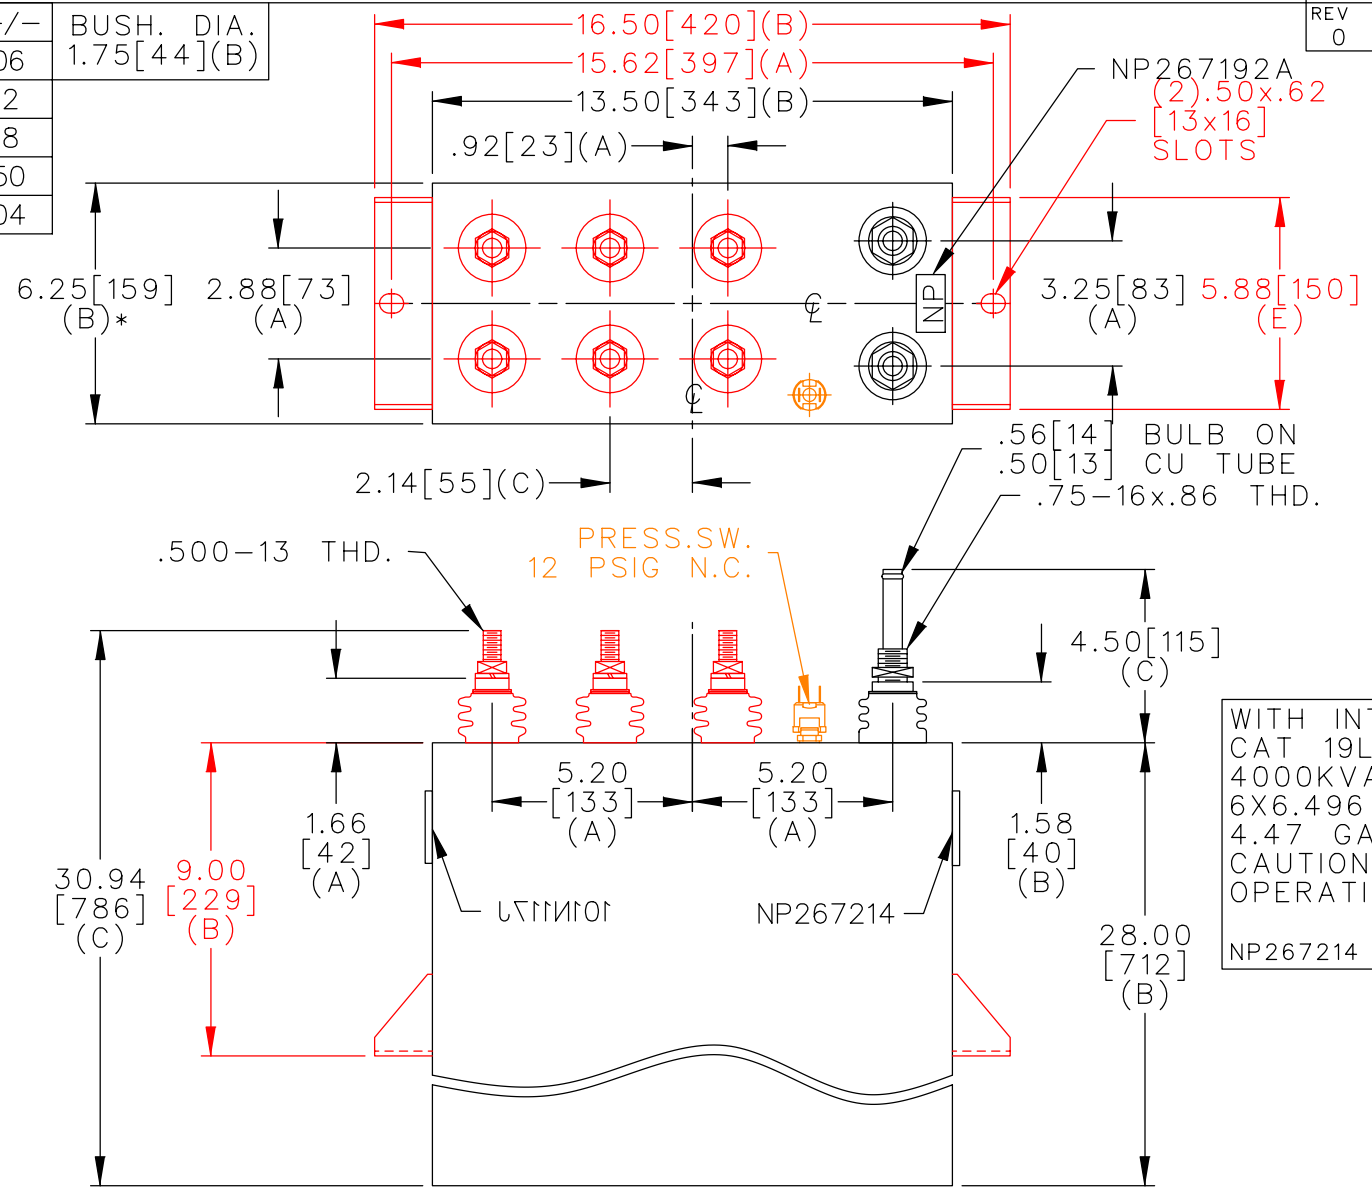

TERM	uF	kVAR
1	6.496	666.7
2	6.496	666.7
3	6.496	666.7
4	6.496	666.7
5	6.496	666.7
6	6.496	666.7

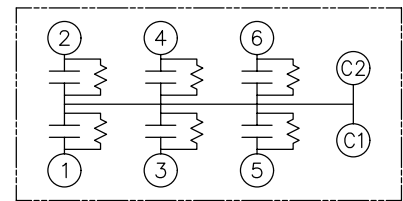

WITH INTERNAL DISCH RESISTORS  
 CAT 19L1153WH4 SN  
 4000KVAR 3300V 1500HZ 1PH  
 6X6.496 uF/TAP  
 4.47 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 119 / 54 LB/KG	<b>OUTLINE</b> <b>19L1153WH4</b>	SHEET 2 CONT. 3 ON 3
	DRAWN 09/28/00	LRD ?	SCALE WC6	version		
ISSUED						

DISTR TO