



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

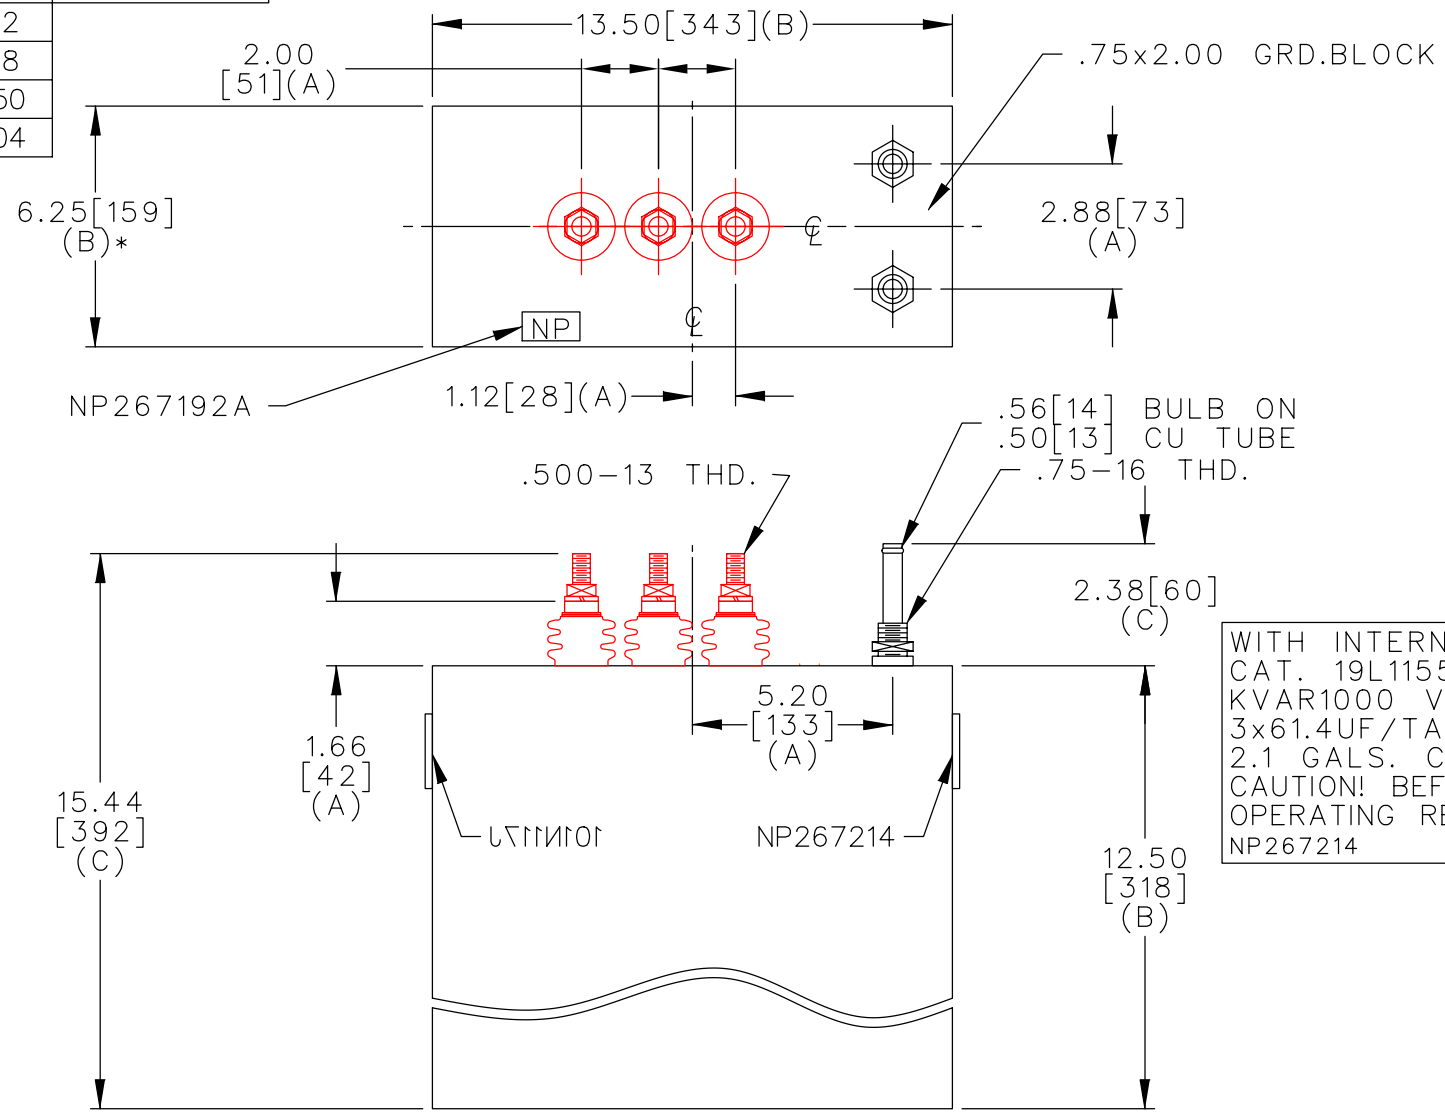

TERM	uF	KVAR
1	61.4	333
2	61.4	333
3	61.4	333

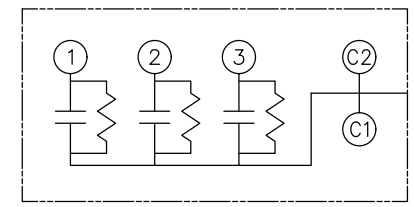

SCHEMATIC DIAGRAM - 328

WITH INTERNAL DISCH RESISTORS
 CAT. 19L1155WH1 SN
 KVAR1000 VOLTS1250 HZ600 PH1
 3x61.4UF/TAP
 2.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 69 / 31 LB/KG	<h1>OUTLINE</h1> <h2>19L1155WH1</h2>	DISTR TO
	DRAWN E.McGINN	NOV. 10, 2000	SCALE	SHEET 2		
ISSUED						