





TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

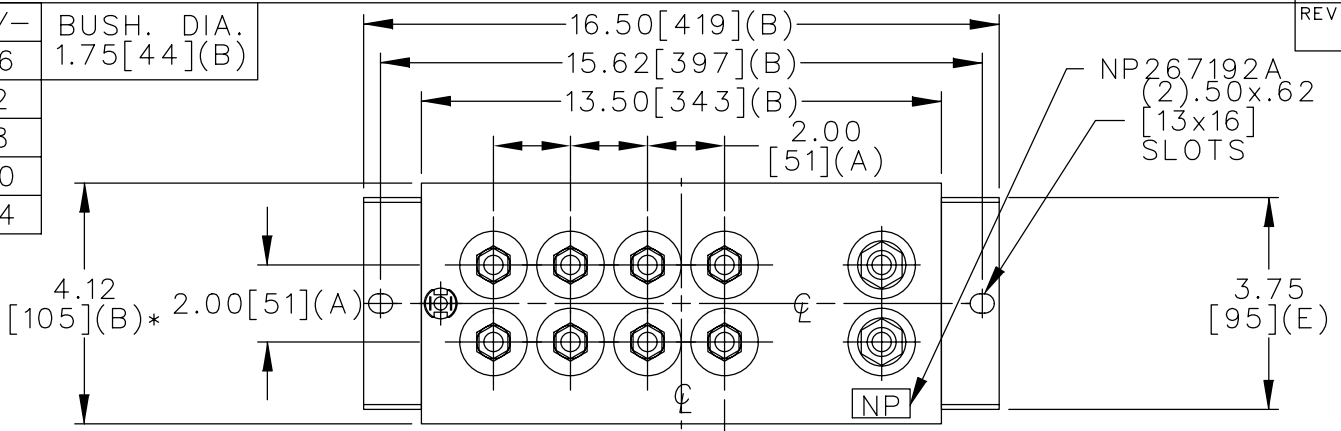

TERM	uF	kVAR
1	4.59	250
2	4.59	250
3	4.59	250
4	4.59	250
5	9.18	500
6	9.18	500
7	9.18	500
8	9.18	500

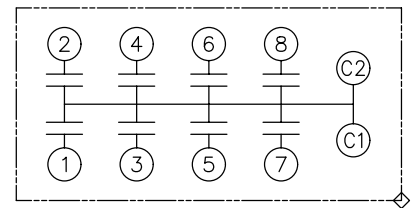

SCHEMATIC DIAGRAM - 800

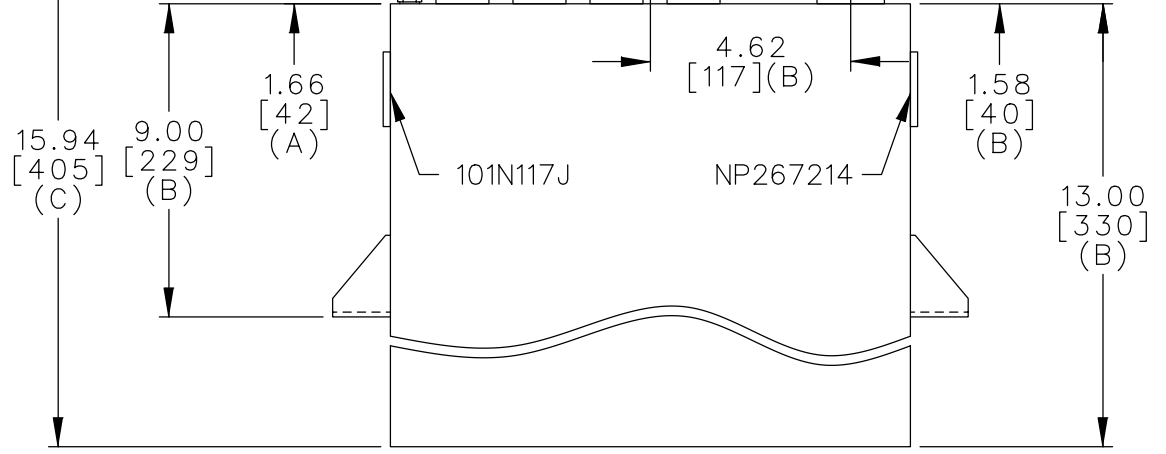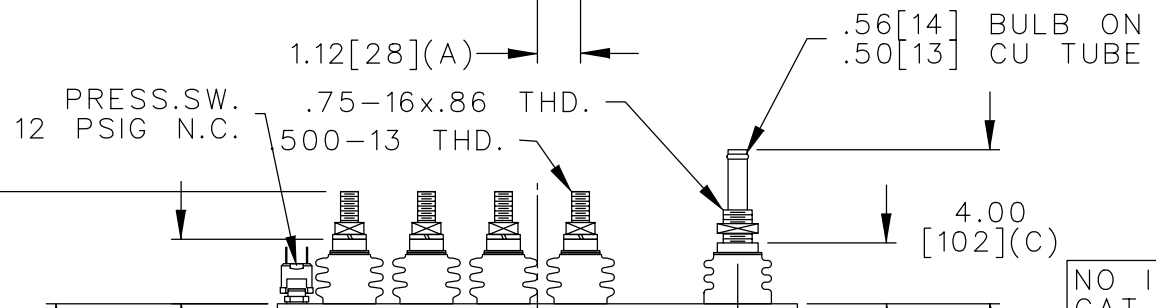

NO INTERNAL DISCH RESISTORS
 CAT. 19L1157WH4 SN
 3000KVAR 1700V 3000HZ 1PH
 4x4.59+4x9.18 UF/TAP
 1.5 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1157WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN DEC.8, 2000	ISSUED	SCALE		