

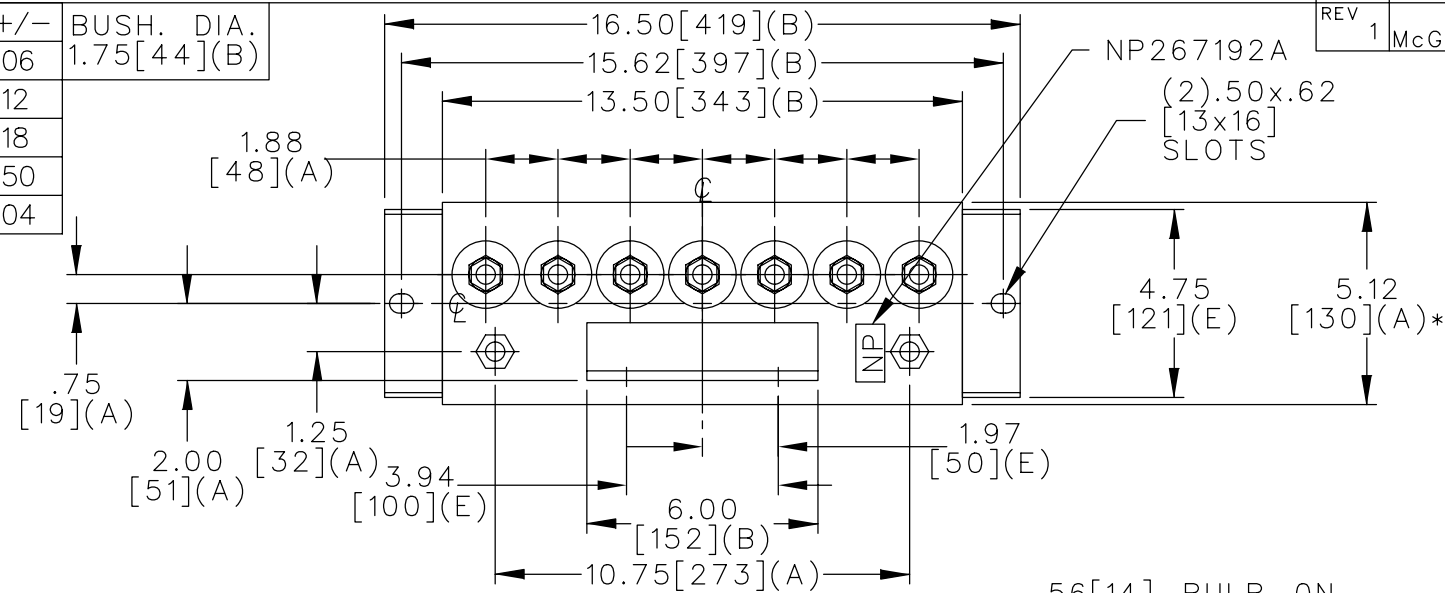


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

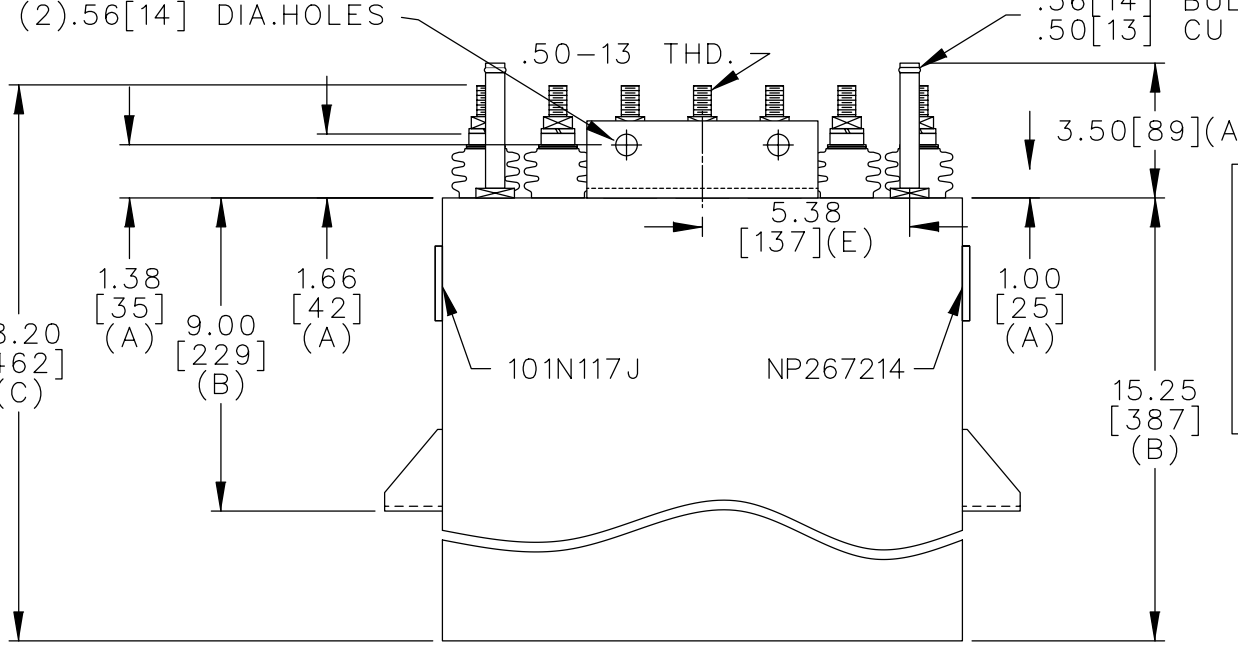

TERM	uF	kVAR
1	0.727	357
2	0.727	357
3	0.727	357
4	0.727	357
5	0.727	357
6	0.727	357
7	0.727	357

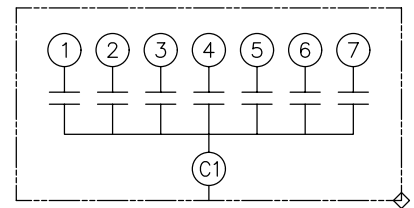

NO INTERNAL DISCH RESISTORS
 CAT. 19L1158WH3 SN
 2500KVAR 1250V 50000HZ 1PH
 7x.727UF/TAP
 2.2 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L1158WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 3, 2001	SCALE		
ISSUED					DISTR TO