



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

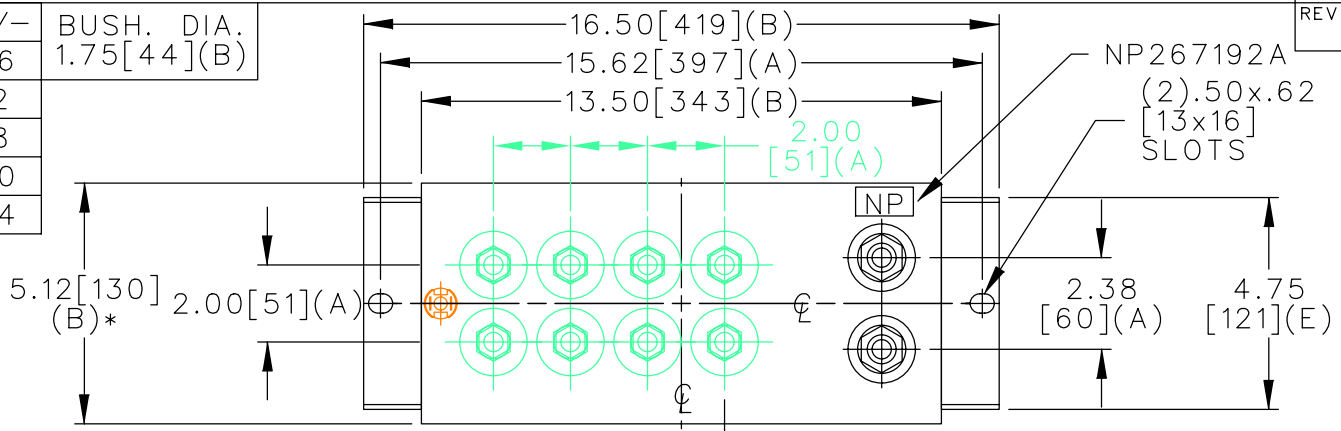


TERM	uF	kVAR
1	10.36	125
2	10.36	125
3	10.36	125
4	10.36	125
5	20.72	250
6	20.72	250
7	20.72	250
8	20.72	250

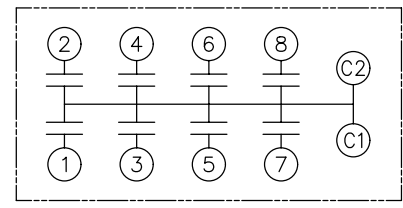

SCHEMATIC DIAGRAM - 800

PRESS.SW.  
12 PSIG N.C.

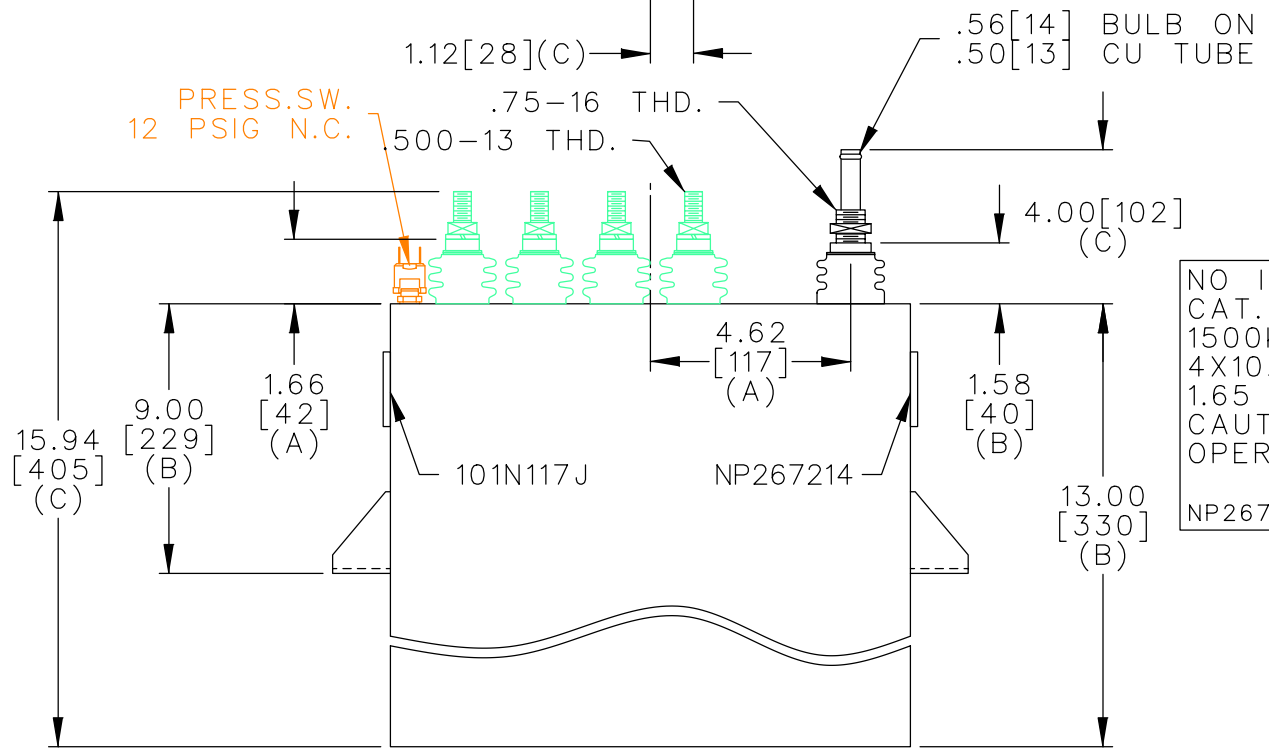

NO INTERNAL DISCH RESISTORS  
 CAT. 19L1183WH4 SN  
 1500KVAR 800V 3000HZ 1PH  
 4X10.36+4X20.72 UF/TAP  
 1.65 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L1183WH4	SHEET 2 CONT. ON
	DRAWN E.McGINN	JULY 23, 2001	SCALE		
ISSUED					DISTR TO