

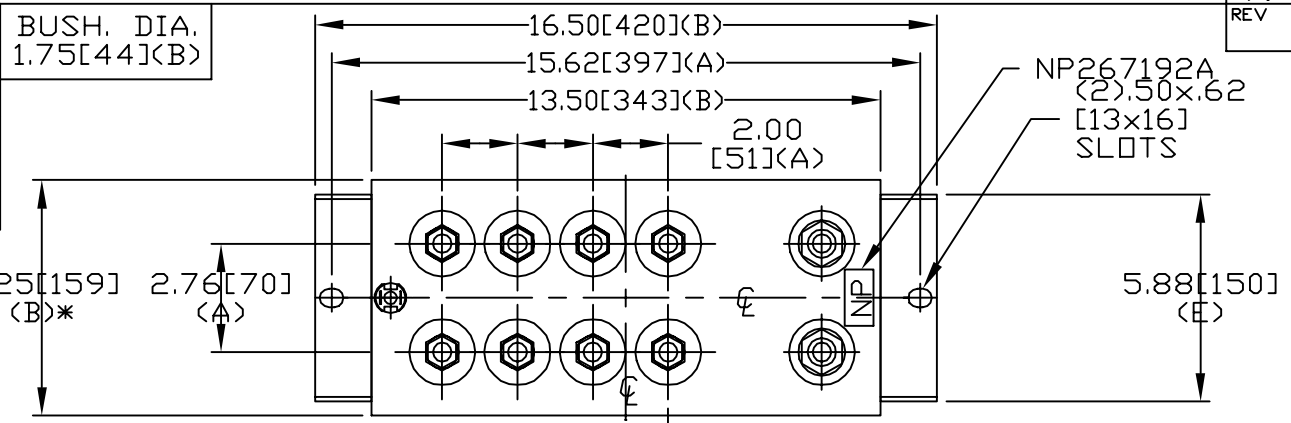



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

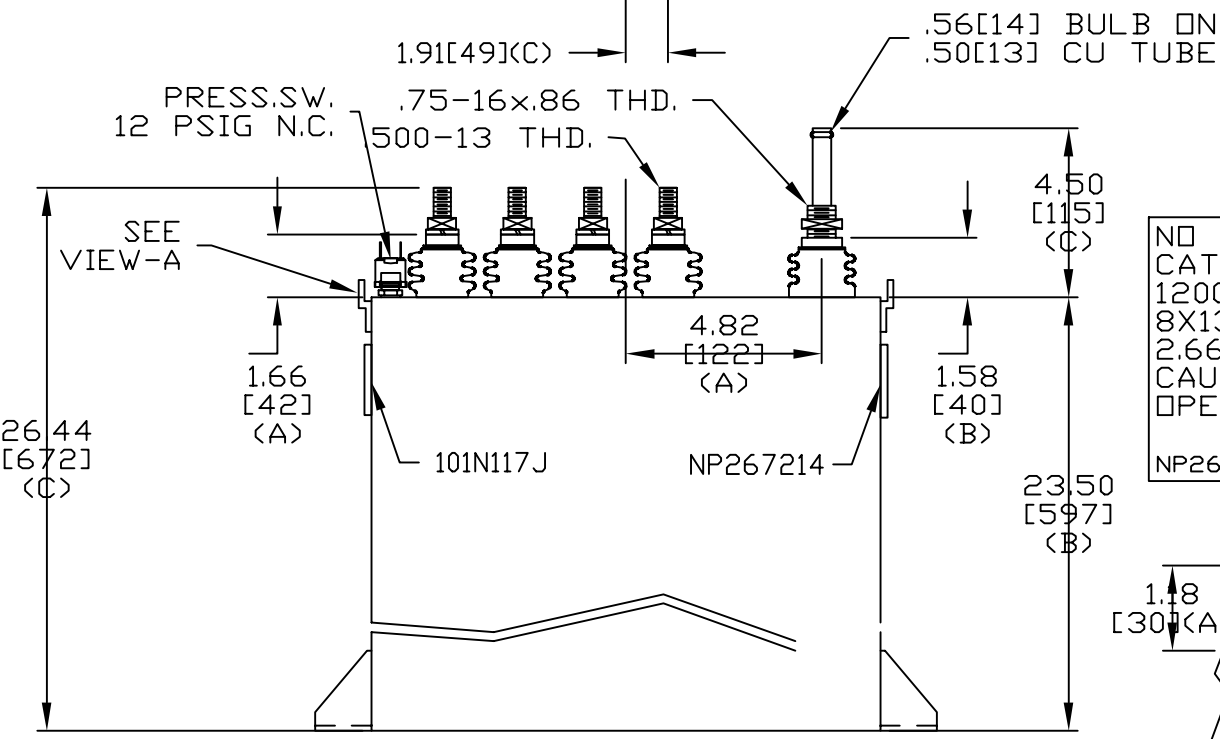

TERM	μF	KVAR
1	132.6	150
2	132.6	150
3	132.6	150
4	132.6	150
5	132.6	150
6	132.6	150
7	132.6	150
8	132.6	150

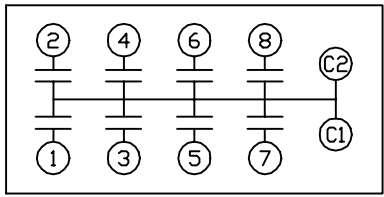

NO INTERNAL DISCH RESISTORS  
CAT. 19L1194WH4 SN  
1200KVAR 600V 500HZ 1PH  
8X132.6 UF/TAP  
2.66 GAL COMBUSTIBLE LIQUID  
CAUTION! BEFORE INSTALLING OR  
OPERATING READ GEG-2733  
NP267214

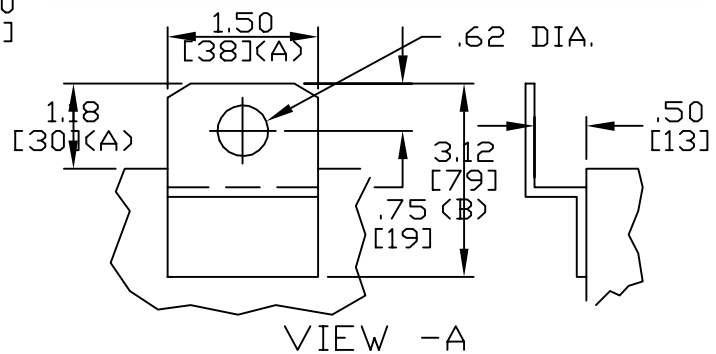

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.  
DRAWN E.McGINN FEB. 25, 2002  
ISSUED

SIZE A UNIT WEIGHT 106 / 48 LB/KG  
SCALE

OUTLINE 19L1194WH4  
SHEET 2 CONT. ON 3  
DISTR TO