



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

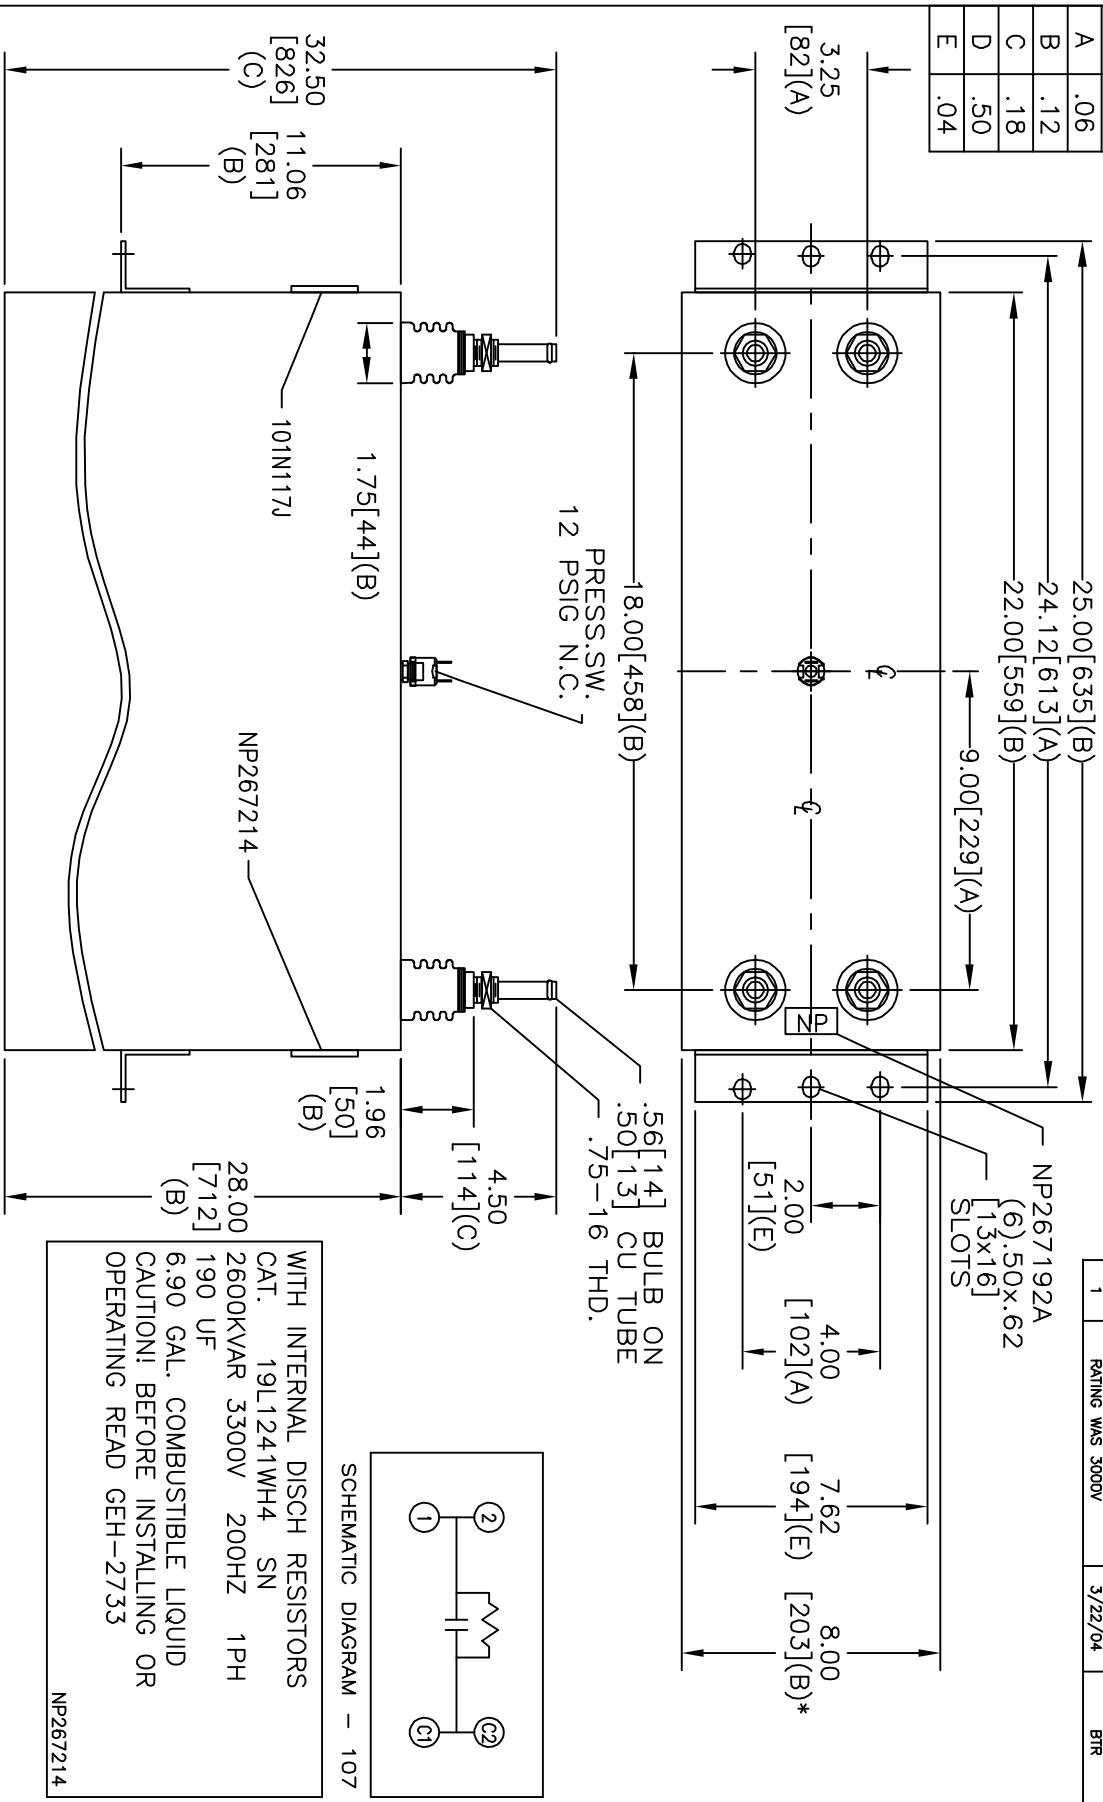

SIZE	DWG NO	SHT	REV
A	19L1241WH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	RATING WAS 3000V	3/22/04	BTR

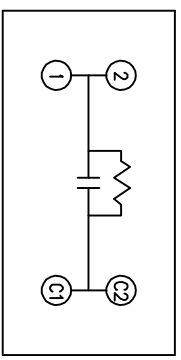

WITH INTERNAL DISCH RESISTORS
 CAT. 19L1241WH4 SN
 2600KVAR 3300V 200HZ 1PH
 190 UF
 6.90 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.75[19]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.
DRAWN B.ROSS
ISSUED

DATE MAR 12, 2004
DATE

SIZE A
SCALE

19L1241WH4
SHEET 2
CONT ON 3

DISTR. TO